JUNE, 1919
20 cts.

ELECTRICAL EXPERIMENTER

SCIENCE AND INVENTION

OVER 175 ILLUST.

REG. U.S. PAT. OFF.

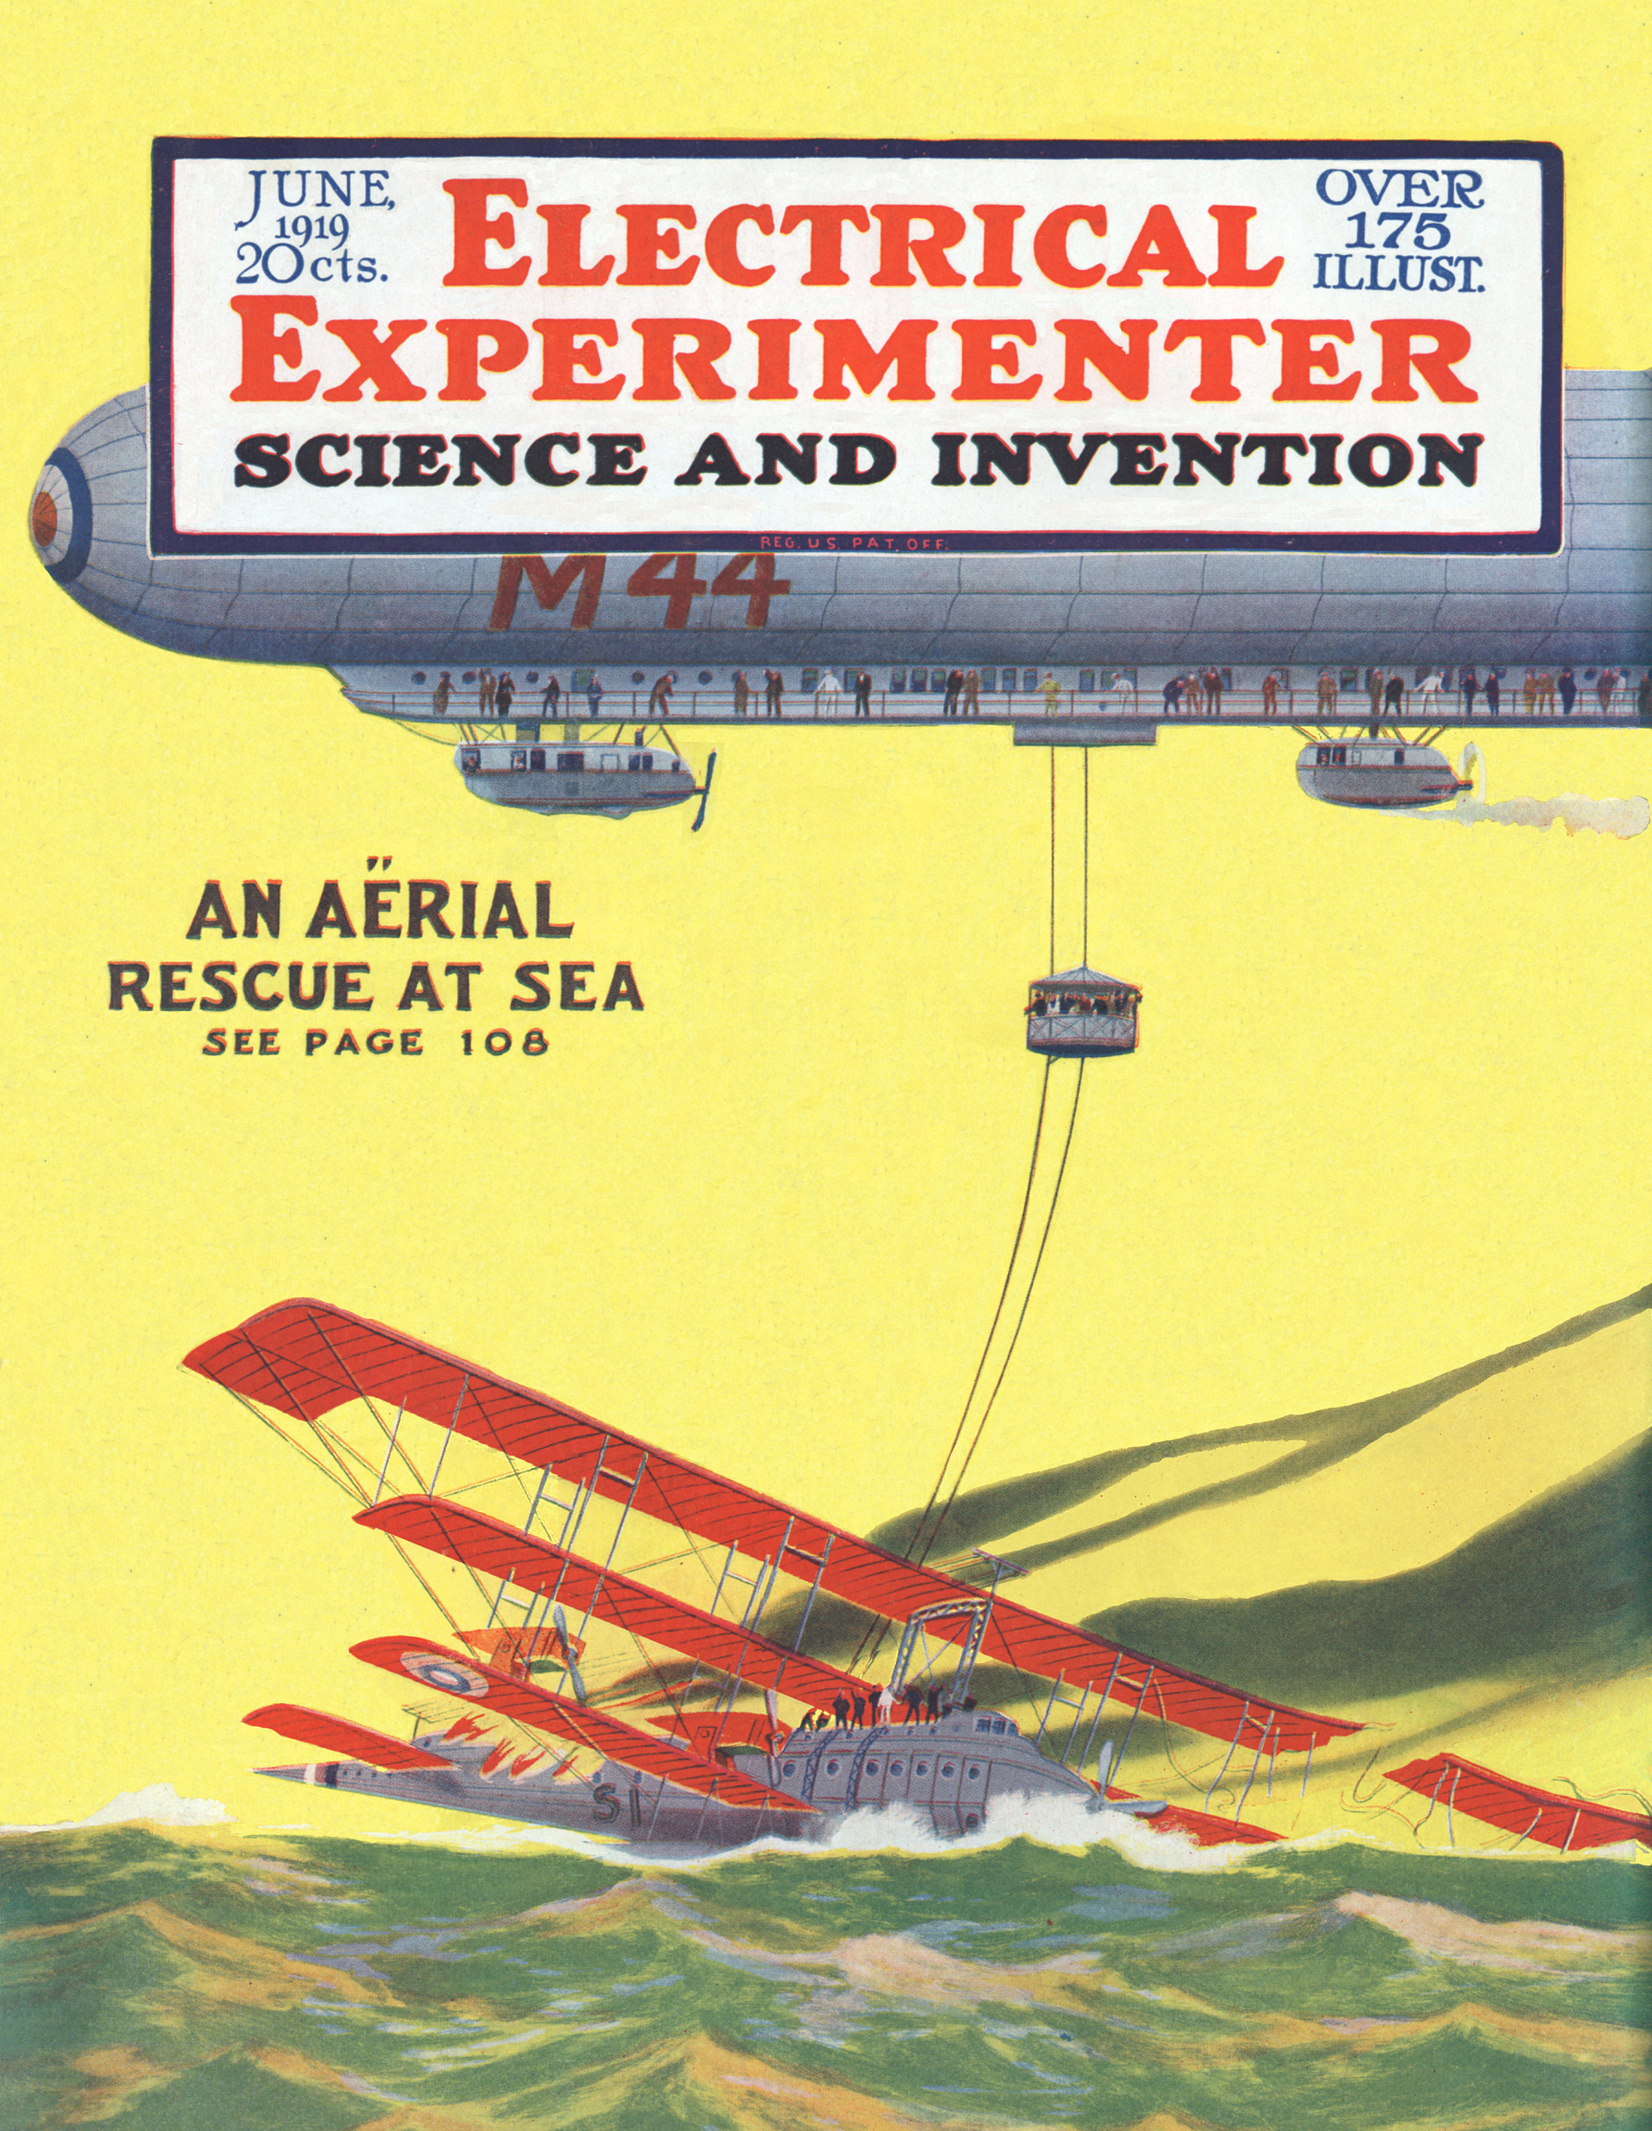

"AN AËRIAL RESCUE AT SEA

SEE PAGE 108

OVER 100,000 COPIES MONTHLY — LARGEST CIRCULATION OF ANY ELECTRICAL PUBLICATION

BE A CERTIFICATED ELECTRICIAN

I WILL TRAIN YOU AT HOME

A REAL POSITION LIKE THIS—FOR YOU

The country needs thousands of trained, Certificated Electricians to fill good positions—and at big pay. It's all a matter of knowing how, and I will teach you by up-to-date, modern instruction. You can learn at home, without interfering with your regular work, by my highly successful method of *Home Instruction* in *Practical Electricity*.

Prepare NOW and be ready in a few months to earn your $46 to $100 A WEEK

Send for this Book

My book, "HOW TO BECOME AN EXPERT ELECTRICIAN," has started thousands of young men on the way to splendid success. A new edition of this has just been printed. I want every young man interested in Electricity to have a copy, and will send you one, ABSOLUTELY FREE AND PREPAID. Write me today.

How I Train My Students

As Chief Engineer of the Chicago Engineering Works I know exactly the kind of training a man needs to enable him to get and hold good positions, and to earn big pay. I have trained hundreds of men who are holding splendid electrical jobs.

I give each of my students personal attention and a complete and thorough training. I give him a SPLENDID ELECTRICAL OUTFIT FREE, and much of the training is done by actual work. When my students graduate and receive their Certificate, they are ready for a real position. But *still more,* at any time you wish you can come to our splendidly equipped Electrical Shops for special training. No other school can give you this.

A Real Opportunity for YOU

Wishing is never going to make your dreams come true. You've got to *study*—to *learn*. A man is worth possibly $2 or $3 a day from his neck down—and no more; but there is *no limit* to what he can be worth from his neck up.

A *trained mind* is what gets the big pay. It is this training that you need, and I can train you in a few months. Are you ambitious to make a real success—then send me the coupon—today.

Electrical Outfit FREE

To every student who answers this ad I am giving a Splendid Electrical Outfit of standard size Electrical Tools, Instruments, Materials, etc., *absolutely free*. Furthermore, to every Electrical Student I give a truly *valuable* surprise that I cannot explain here.

Free Employment Service

I am continually receiving requests from employers to send them trained Electrical men. I assist my students to secure good positions. I keep in touch with them for years, helping and advising them in every possible way.

Write Now—Don't Delay

Delay never got you anything. Action is what counts. Get started—and get started now. Write me, or send me the coupon, right NOW.

L. L. COOKE, *Chief Engineer*
CHICAGO ENGINEERING WORKS
441 CASS ST. Dept. 26 CHICAGO

USE THIS "FREE OUTFIT" COUPON

CHIEF ENG. COOKE, Dept. 26, 441 Cass St., Chicago, Ill.

Sir: Send at once—fully prepaid and entirely free—complete particulars of your great offer for this month.

Name .....

Address .....

City .....

State .....

YOU CAN DO IT

Learn ELECTRICITY as in practice



Electricity as experts know it—

RIGHT before you there is pictured a compact set of books which contains all the information you require to advance to the highest positions in the world of electricity. No instruction, no consultation by correspondence is necessary. The entire subject is before you, clearly written and clearly illustrated.

Whether you have spent years with electricity, or are a mere beginner, CROFT'S LIBRARY OF PRACTICAL ELECTRICITY will enable you to master modern practice, and fit you quickly for one of the thousands of responsible positions now open to those who are properly trained in electricity.

NOT ONE CENT IN ADVANCE

In twenty years' practice Terrell Croft has learned many things about electricity. As apprentice, as lineman, as draftsman, and finally as electrical engineer with the Westinghouse Company, he has learned the practical man's wants.

With his own practical experience, and with the co-operation of a score of other authorities, he has completed what is considered the most valuable study and reference course ever attempted.

No other set of books or course of instruction ever adhered so closely to actual work. Nothing else of the kind ever told so vividly the story of electricity as experts know it.



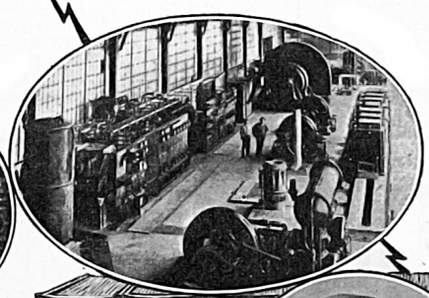

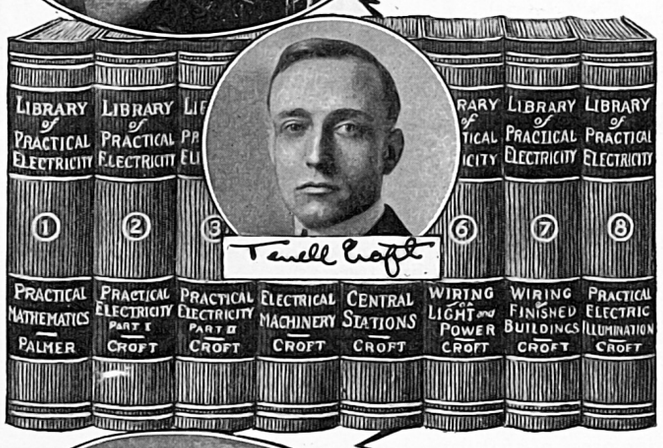



CROFT'S LIBRARY of PRACTICAL ELECTRICITY

8 Vols.-Flexibly bound-3000 Pages 2100 Illustrations



A SET of books which covers the wide subject of electricity completely, comprehensively and practically cannot be adequately described, therefore we extend to every reader of this paper an invitation to examine the books absolutely free.

Merely fill out the coupon below and return to us. We will ship the books, all charges prepaid, for ten days' free use. The books are pocket-size. Carry one or two with you to work, and look them over evenings. Test their usefulness by using them in connection with your work. Keep them ten full days. Then return them at our expense if you think they will not enable you to know electricity as experts know it. Pay only $2 per month for eight months if you are thoroughly pleased.

This is your opportunity. Will you grasp it?



Only $2 per month for 8 months for a complete electrical education

McGraw-Hill Book Co., Inc.,
239 W. 39th Street,
New York, N. Y.
Gentlemen: The CROFT LIBRARY OF ELECTRICITY reached me March 3 and more than came up to my expectations. I have been in the electrical business for fifteen years, and know the general run of electrical books. Terrell Croft's Library is the best I have ever had the pleasure of examining.
Yours truly,
EDWARD T. HOFF,
713-3rd Avenue,
Asbury Park, N. J.

Free Examination Coupon

McGraw-Hill Book Co., Inc.
239 W. 39th St., New York

Gentlemen:—Please send me the Library of Practical Electricity (shipping charges prepaid), for 10 days' free examination. If satisfactory I will send $2 in ten days and $2 per month until $16 has been paid. If not wanted, I will write you for return shipping instructions.

Name .....

Home Address .....

City and State .....

Where Employed .....

Occupation Ex-6-19

Electrical Experimenter

233 FULTON STREET, NEW YORK

Publisht by Experimenter Publishing Company, Inc. (H. Gernsback, President; S. Gernsback, Treasurer;) 233 Fulton Street, New York.

Vol. VII. Whole No. 74 **JUNE, 1919** **No. 2**

AN AËRIAL RESCUE AT SEA.....Front Cover
From a painting by George Wall
LISTENING TO THEATRE CRITICS..... 105
ELECTRIC DRIVE ON U. S. S. "NEW MEXICO"..... 106
By Charles M. Ripley, of the General Electric Co.
NEW AËRIAL DEVELOPMENTS, by H. Gernsback..... 108
HUNTING SUBMARINES BY SOUND, by Brewster S. Beach.... 110
THAT ONE-MAN SUBMERSIBLE..... 111
MY INVENTIONS, PART V, by Nikola Tesla..... 112
FILMING "TALKING MOVIES" IN GLASS HOUSES..... 114
By H. Winfield Secor
CALL UP WIFEY ON THE STOVE-PIPE RADIO..... 115
TIN CAN MODELS—A NEW ART, by George Holmes..... 116
MAKING A PRACTICAL ELECTRICIAN..... 117
CLOSE-UPS OF NEW SCIENTIFIC MOVIES..... 118
PARIS LETTER 119
By Jacques Boyer, Paris Correspondent of the Electrical Experimenter
POPULAR ASTRONOMY—"THE EVOLUTION OF THE STARS" 120
By Isabel M. Lewis of the U. S. Naval Observatory
PRACTICAL CHEMICAL EXPERIMENTS—EGGS AND THEIR PRESERVATION, by Albert W. Wilsdon..... 122
EXPERIMENTS IN RADIO ACTIVITY, PART IV (Conclusion)... 123
By Ivan Crawford
HOW TO BUILD AN EFFICIENT MEDICAL COIL SET..... 124
By H. Winfield Secor
A SMALL HIGH FREQUENCY OUDIN COIL, by E. W. Cooke... 126
EXPERIMENTAL MECHANICS, LESSON XII, PRACTICAL GRINDING OF TWIST DRILLS, by Samuel D. Cohen..... 127
"HOW TO MAKE IT" DEPARTMENT, PRIZE CONTEST..... 128
WRINKLES, RECIPES AND FORMULAS, Edited by S. Gernsback. 130
THE RADIO LEAGUE OF AMERICA—AMATEUR RADIO RESTORED, by H. Gernsback..... 131
THE MOON'S ROTATION, by Nikola Tesla..... 132
RADIO DEPARTMENT—TESLA BULBS 134
THE ALEXANDERSON "BARRAGE" RECEIVER..... 135
THE ROGERS UNDERGROUND AËRIAL FOR AMATEURS..... 136
LEARNING THE CODE, by Howard D. Wildman..... 138
RADIO CONSTRUCTOR DEPARTMENT..... 139
CHOKE COILS—THEIR THEORY, CONSTRUCTION AND DESIGN, by Prof. F. E. Austin..... 140
LATEST PATENTS DIGEST 141
WITH THE AMATEURS—PRIZE LABORATORY CONTEST..... 142
SCIENCE IN SLANG, by Emerson Easterling..... 143
THE ORACLE 144

EDITORIAL

Tree Wireless

IN 1904, during Army maneuvers in California, General, then Major, George O. Squier, of the U. S. Signal Corps, made the important discovery that it was possible to receive radio messages, using live trees as an aërial. He found that by merely driving a metallic spike into the tree trunk, a few feet above the ground, and by connecting the wire from his radio receiving instruments to the spike, messages would come in astonishingly well over this new "aërial".

The invention, while important, received but scant notice, even in the scientific press of that day. Indeed, the majority of radio people knew very little about the invention, and those who did know considered the tree aërial as a freak, along with the bed-spring aërial and others of a similar nature.

During the war, however, the discoverer of the system, who had now become Major General Squier, Chief Signal Officer of the Army, made many new experiments with trees and radio. Recently, before the Physical Society, General Squier delivered a highly interesting lecture on the subject, and from what transpired, it is certain we have merely scratched the surface of an important invention.

General Squier, for instance, has been in constant communication with Europe for months, receiving messages from all of the large radio stations located in England, France, Italy and Germany, using nothing but trees for his aërials. But that was not all. He demonstrated that it was just as easy to *send* radio messages over a tree as it was to receive them. Indeed this holds true not only for telegraph messages, but radio telephone communication has been actually carried on between trees over a distance of *three miles!* So far no attempt has been made to increase this distance, altho it is obvious that any distance, depending only upon the power of the sending instruments, can be bridged in this manner.

That this system proved of immense value during the war can be readily imagined. Our signal corps men for that reason never were troubled with the communication lines in their rear, as long as there was a live tree about. No conspicuous wire aërial was needed for their radio work; code messages flew back and forth from the most extended points of our lines, right under the Germans' noses, who never suspected innocent-looking trees as being the carriers of priceless information.

General Squier thinks that the tree aërial will soon supplant the wire antenna entirely; even the big commercial stations, he thinks, can make excellent use of his discovery. The radio amateur particularly, will find the trees about his house a new and welcome source for his experiments. Many parents and landlords object to unsightly aërials on or about the house. An innocent-looking tree—if there is one near at hand—now solves the problem for the ambitious amateur. And the higher the tree, the better the results.

The new botanical antenna, on the other hand, brings us many new and interesting problems. One—and a curious one at that—is: How to figure the *wave length* of such an aërial! No doubt General Squier has, or will work out a standard formula for us. Undoubtedly, too, the wave length will vary from year to year—due to the growth of the tree. Then, too, in Spring, before the leaves are on the tree, the wave-length should be slightly less than in the summer time, due to the smaller area and resultant capacity. Also it would seem that in the winter time, the wave-length of the tree would be much less than in the Spring, due to the conducting sap receding from the branches.

Suppose you were to "spike up" every tree in a small wood—say, a thousand trees! The enormous area exposed to the ether, would theoretically give us a wonderfully effective antenna. We say theoretically, because we do not know how the immense added capacity would affect our instruments.

H. GERNSBACK.

The **ELECTRICAL EXPERIMENTER** is publisht on the 15th of each month at 233 Fulton Street, New York. There are 12 numbers per year. Subscription price is $2.00 a year in U. S. and possessions. Canada and foreign countries, $2.50 a year. U. S. coin as well as U. S. stamps accepted (no foreign coins or stamps). Single copies, 20 cents each. A sample copy will be sent gratis on request. Checks and money orders should be drawn to order of EXPERIMENTER PUBLISHING CO., INC. If you change your address notify us promptly, in order that copies are not miscarried or lost. **A green wrapper indicates expiration. No copies sent after expiration.**

All communications and contributions to this journal should be address to: **Editor, ELECTRICAL EXPERIMENTER, 233 Fulton Street, New York.** Unaccepted contributions cannot be returned unless full postage has been included. ALL accepted contributions are paid for on publication. A special rate is paid for novel experiments; good photographs accompanying them are highly desirable.

ELECTRICAL EXPERIMENTER. Monthly. Entered as second-class matter at the New York Post Office under Act of Congress of March 3, 1879. Title registered U. S. Patent Office.

Copyright, 1919, by E. P. Co., Inc., New York. **The Contents of this magazine are copyrighted and must not be reproduced without giving full credit to the publication.**

The ELECTRICAL EXPERIMENTER is for sale at all newsstands in the United States and Canada; also at Brentano's, 37 Avenue de l'Opera, Paris.

Member of the Audit Bureau of Circulation.

The New Social Order

THE way is being prepared for a social order more wonderful than anything ever heretofore dreamed of; the conflict of modern science with theology; the study of comparative religions; the tremendous power of new social movements; all of these are but preparing the way for the new order.

Men, now understand that for every condition there is an adequate and definite cause, so that when a given result is desired, they seek only the cause by which this result may be obtained.

The discovery of a reign of law marked an epoch in human progress. It eliminated the element of uncertainty and caprice from the lives of men, and substituted law, reason and certitude.

These laws operate with scientific exactitude and those who have succeeded in obtaining a working knowledge of them, are enabled to break the bonds of environment; control elementary forces and utilize the potentialities of Infinity.

The Master Key tells of these wonderful Natural Laws and therefore substitutes definite principles for uncertain and hazy methods. An understanding of this scientific truth is the imperative condition, the underlying verity, the necessary precedent to every truly successful business or social relation.

Men are finding that permanent success is built upon honor, not upon dishonor; they are finding that the greatest and most penetrating mind loses its way hopelessly and can form no conception of the results of an action based upon a false premise.

The Master Key avoids theory, speculation and abstractions of all kinds. It confines itself to the operation of natural laws. These laws are clear, concise, definite and positive and can be demonstrated by any one.

The Master Key is not interested in conditions or effects, but in the cause by which the effects are produced; it is therefore limitless and has rewards hardly to be expressed in words.

All conditions are the result of the operation of this law, but unfortunately, the law will operate to our disadvantage just as readily as for our benefit and for this reason many are unconsciously creating discordant, destructive, inharmonious, poverty stricken conditions instead of conditions of health, abundance, elegance, beauty, refinement and wealth. It is simply a question of understanding; a question of knowing how to take advantage of natural laws.

If you have any objective in life, which you have not as yet succeeded in taking, or if you wish to change any condition, physical, mental, financial or environmental, or if you wish to add an asset of inestimable value to your present resources, the Master Key has a message for you.

A copy will be sent to any address without cost or obligation of any kind.

CHARLES F. HAANEL
423 GRANITE BUILDING
ST. LOUIS, MO.

TREAT YOURSELF With The Wonderful *Health Restorer* VIOLET RAY

Now made simple and perfectly safe

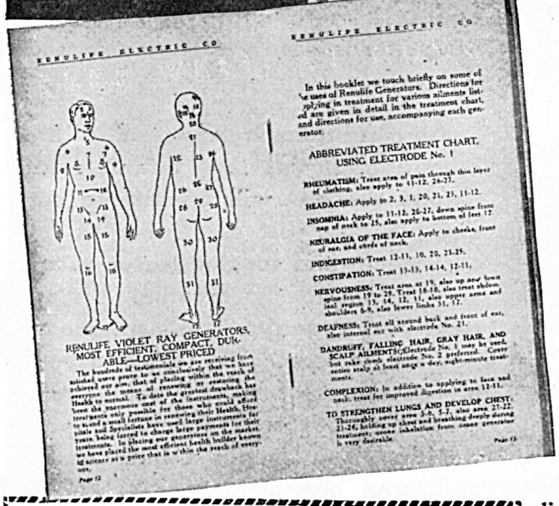
RENULIFE ELECTRIC CO.

In this booklet we touch briefly on some of the uses of Renulife Generators. Directions for applying in treatment for various ailments listed are given in detail in the treatment chart, and directions for use, accompanying each generator.

ABBREVIATED TREATMENT CHART, USING ELECTRODE No. 1

RHEUMATISM: Treat area of pain through thin layer of clothing, also apply to 11-12, 26-27.

HEADACHE: Apply to 2, 3, 1, 20, 21, 25, 11-12.

INSOMNIA: Apply to 11-12, 26-27, down spine from nape of neck to 25, also apply to bottom of feet 17

NEURALGIA OF THE FACE: Apply to cheeks, front of ear, and sides of neck.

INDIGESTION: Treat 12-13, 10, 25, 23-25.

CONSTIPATION: Treat 13-13, 14-14, 12-11.

NERVOUSNESS: Treat area at 19, also up and down spine from 19 to 25. Treat 10-10, also treat abdominal region, 13, 14, 12, 11, also upper arms and shoulders 8-9, also lower limbs 31, 32.

DEAFNESS: Treat all around back and front of ear, also interest ear with electrode No. 21.

DANDRUFF, FALLING HAIR, GRAY HAIR, AND SCALP AILMENTS: Electrode No. 1 may be used, but take clean electrode No. 2 preferred. Cover entire scalp at least once a day, eight-minute treatments.

COMPLEXION: In addition to applying to face and neck, treat for improved digestion in area 12-11.

TO STRENGTHEN LUNGS AND DEVELOP CHEST: Thoroughly cover area 3-6, 5-7, also area 27-22. Breathing deeply during treatment, ozone inhalation from ozone generator is very desirable.

RENULIFE ELECTRIC CO.

RENULIFE VIOLET RAY GENERATORS, MOST EFFICIENT, COMPACT, DURABLE—LOWEST PRICED

The hundreds of testimonials we are receiving from satisfied users prove beyond question that we have attained our aim, that of renewing or creating that energy the want of which is the greatest drawback for those not in vigorous health. Thanks to recent improvements, making it possible for those not in vigorous health, free treatments only possible for those who could afford to spend a small fortune in securing their Health, Specialists have used large instruments for years, being forced to charge large payments for their treatments. In placing our generators on the market, we have placed the most efficient health builder known to science at a price that is within the reach of everyone.

You Can Have Bodily Vigor, Success-Attaining Energy, Attractive, Healthful Beauty

All at practically no cost—The great benefits of the ***Violet Ray treatments*** heretofore only procurable at big expense from physicians and beauty specialists are now available in your own home. Look over list of treatments below. Send for particulars.

How Violet Ray Benefits

Electricity from your light socket is transformed into health and beauty-giving Violet Ray—powerfully effective, yet gentle, soothing, perfectly safe. Voltage is raised from ordinary lighting current to *thousands of volts*, giving tremendous penetrative force. The irresistible, revitalizing powers of *Renulife Violet Ray* are carried at once to every nerve cell, fibre and part of body. Blood is enriched and purified by a flood of oxygen, giving added vitality and strength. Assimilation and digestion improved—functions restored to normal—extra supply of fresh blood quickly brought to area treated, removing congestion and supplying nourishment. While relieving pains and aches, the manifest results of disorders, it removes the deep-seated cause; combines the benefits of electricity, vibration, exercise, stimulation and oxidation.

Painless Electricity

Science has modified electricity that the weakest may stand its force without fear or pain. Every tissue and fibre is saturated, patient experiencing only a sensation of relief, as if standing in a ray of sunshine. *Violet Ray high frequency* has no comparison with old, crude, electrical batteries and shocking current. Every jar and shock is removed. The effects are marvelously rapid. Relief can be given in one or more treatments. Often cures are accomplished in that time. It is positive and certain in action. If you value your health, and want to keep or restore your good looks and gain vitality, throw away medicine bottles—take this sensible, scientific means. *Violet Rays* work with nature. Every day's delay makes relief more difficult.

Renulife Violet Ray
HIGH FREQUENCY GENERATORS

Offered on a Most Liberal
TRIAL PLAN
Learn the Wonderful Benefits by Actual Use

Send for Booklet, "Health via Violet Ray."

RENULIFE ELECTRIC CO., 637 Marquette Bldg., Detroit, Mich.

CANADIAN RENULIFE ELECTRIC CO.
237 Netting Bldg., Windsor, Ont.

SALES REPRESENTATIVES WANTED

COUPON FOR BOOK and Special Information

RENULIFE ELECTRIC CO.,
637 Marquette Bldg., Detroit, Mich.

Please send without obligation, your book "Health." explaining Violet Ray treatments with Renulife Generators; also give full particulars as to its application for ailments checked below

TREATS SUCCESSFULLY

- Abscesses
- Anemia
- Asthma
- Arteriosclerosis
- Baldness
- Blackheads
- Brain Fag
- Bronchitis
- Bunions
- Bruises
- Catarrh
- Colds
- Chilblains
- Dandruff
- Deafness and Ear Diseases
- Eczema
- Enlarged Prostate
- Facial Neuralgia
- Falling Hair
- Female Complaints
- Goitre
- Gout
- Haemorrhoids
- Hay Fever
- Infantile Paralysis
- Insomnia
- Lameness
- Locomotor Ataxia
- Lumbago
- Nervous Affections
- Neuralgia
- Neuritis
- Obesity
- Pain in Abdomen and Chest
- Paralysis
- Piles
- Pimples
- Pyorrhea
- Rheumatism
- Scars
- Sciatica
- Skin Diseases
- Sore Throat and Throat Diseases
- Sprains
- Toothache
- Weak Eyes
- Wrinkles
- Warts and Moles

Name.....

Address.....

.....

Unequaled for scalp and hair

Brings beauty parlor to your home

Inhaling ozone. For Catarrh, throat and lungs. Marvelous local results with general tonic effect

Treatment for general debility, nervousness, etc.

New Stomachs for Old In 48 Hours

By R. S. Thompson


EUGENE CHRISTIAN

THOUSANDS of people who suffered for years with all sorts of stomach trouble are walking around today with entirely re-made stomachs—stomachs which have been re-made in from 48 to 72 hours! They enjoy their meals and never have a thought of indigestion, constipation or any of the serious illnesses with which they formerly suffered and which are directly traceable to the stomach.

And these surprising results have been produced not by drugs or medicines of any kind, not by foregoing substantial foods, not by eating specially prepared or patented foods of any kind, but by eating the plainest, simplest foods *correctly combined!*

These facts were forcibly brought to my mind by Eugene Christian, the eminent Food Scientist, who is said to have successfully treated over 23,000 people with foods alone!

As Christian says, man is what he *eats*. What we take into our stomachs today, we are tomorrow. Food is the source of all power, yet not one person in a hundred knows the chemistry of foods as related to the chemistry of the body. The result is we are a nation of "stomach sufferers."

Christian has proved that to eat good, simple, nourishing food is not necessarily to eat correctly. In the first place, many of the foods which we have come to regard as good are in reality about the worst things we can eat, while others that we regard as harmful have the most food value.

But perhaps the greatest harm which comes from eating blindly is the fact that very often two perfectly good foods when eaten at the same meal form a chemical reaction in the stomach and literally explode, liberating dangerous toxic poisons which are absorbed by the blood and circulate throughout the system, forming the root of all or nearly all sickness, the first indications of which are acidity, fermentation, gas, constipation and many other sympathetic ills leading to most serious consequences.

And yet just as wrong food selections and combinations will destroy our health and efficiency, so will the right foods quickly create and maintain bodily vigor and mental energy. In my talk with Eugene Christian, he told me of some of his experiences in the treatment of disease through food—just a few instances out of the more than 23,000 cases he has on record.

One case which interested me greatly was that of a young business man whose efficiency had been practically wrecked through stomach acidity, fermentation and constipation, resulting in physical sluggishness which was naturally reflected in his ability to use his mind. He was twenty pounds underweight when he first went to see Christian and was so nervous he couldn't sleep. Stomach and intestinal gases were so severe that they caused irregular heart action and often fits of great mental depression. As Christian describes it, he was not 50 per cent efficient either mentally or physically. Yet in 24 hours, by following Christian's suggestions as to food, his constipation was relieved, although he had formerly been in the habit of taking large daily doses of a strong cathartic. In five weeks every abnormal symptom had disappeared—his weight having increased 6 lbs. In addition to this, he acquired a store of physical and mental energy so great in comparison with his former self as to almost belie the fact that it was the same man.

Another instance of what proper food combinations can do almost overnight was that of a man one hundred pounds overweight whose only other discomfort was rheumatism. This man's greatest pleasure in life was eating. Though convinced of the necessity, he hesitated for months to go under treatment, believing he would be deprived of the pleasures of the table. He finally, however, decided to try it out. Not only did he begin losing weight within a few hours, regaining his normal figure in a matter of weeks, but all signs of rheumatism disappearing, and he found the new diet far more delicious to the taste and afforded a much keener quality of enjoyment than his old method of eating, and wrote Christian a letter to that effect.

But perhaps the most interesting case that Christian told me of was that of a multi-millionaire—a man 70 years old, who had been traveling with his doctor for several years in a search for health. He was extremely emaciated, had chronic constipation, lumbago, and rheumatism. For over twenty years he had suffered with stomach and intestinal trouble which in reality was superaciduous secretions in the stomach. The first menus given him were designed to remove the causes of acidity, which was accomplished almost overnight. And after this was done he seemed to undergo a complete rejuvenation. His eyesight, hearing, taste, and all of his mental faculties became keener and more alert. He had had no organic trouble—but he was starving to death from malnutrition and decomposition—all caused by the wrong selection and combination of foods. Almost immediately after following Christian's advice this man could see results, and after six months he was as well and strong as he had ever been in his life.

These instances of the efficacy of right eating I have simply chosen at random from perhaps a dozen Eugene Christian told me of, every one of which was fully as interesting, and they applied to as many different ailments. Surely this man Christian is doing a great work.

I know of several instances where rich men and women have been so pleased with what he has done for them that they have sent him a check for $500 or $1,000 in addition to the amount of the bill when paying him.

There have been so many inquiries from all parts of the United States from people seeking the benefit of Eugene Christian's advice and whose cases he is unable to handle personally that he has written a little course of lessons which tells you exactly what to eat for health, strength and efficiency. This course is published by The Corrective Eating Society of New York.

These lessons, there are 24 of them, contain actual menus for breakfast, luncheon, and dinner, covering every condition of health and sickness from infancy to old age and for all occupations, climates, and seasons.

Reasons are given for every recommendation based upon actual results secured in the author's many years of practice although technical terms have been avoided. Every point is explained so clearly that there can be no possible misunderstanding.

With these lessons at hand it is just as though you were in personal contact with the great food specialist, because every possible point is so thoroughly covered that you can scarcely think of a question which isn't answered. You can start eating the very things that will produce the increased physical and mental energy you are seeking the day you receive the lessons, and you will find that you secure results with the first meal. This of course, does not mean that complicated illnesses can be removed at one meal, but it does mean that real results can nearly always be seen in 48 hours or less.

If you would like to examine these 24 little Lessons in Corrective Eating, simply write The Corrective Eating Society, Department 1646, 443 Fourth Avenue, New York City. It is not necessary to enclose any money with your request. Merely ask them to send the lessons on five days' trial, with the understanding that you will either return them within that time or remit $3.00, the small fee asked.

The reasons that the Society is willing to send the lessons on free examination without money in advance is because they want to remove every obstacle to putting this knowledge in the hands of the many interested people as soon as possible, knowing full well that a test of some of the menus in the lessons themselves is more convincing than anything that can possibly be said about them.

Please clip out and mail the following form instead of writing a letter, as this is a copy of the blank adopted by the Society, and will be honored at once

CORRECTIVE EATING SOCIETY,

Dept. 1646, 443 Fourth Ave., New York City.

You may send me prepaid a copy of Corrective Eating in 24 Lessons. I will either remail them to you within five days or send you $3.

Name..... Address.....

City..... State.....

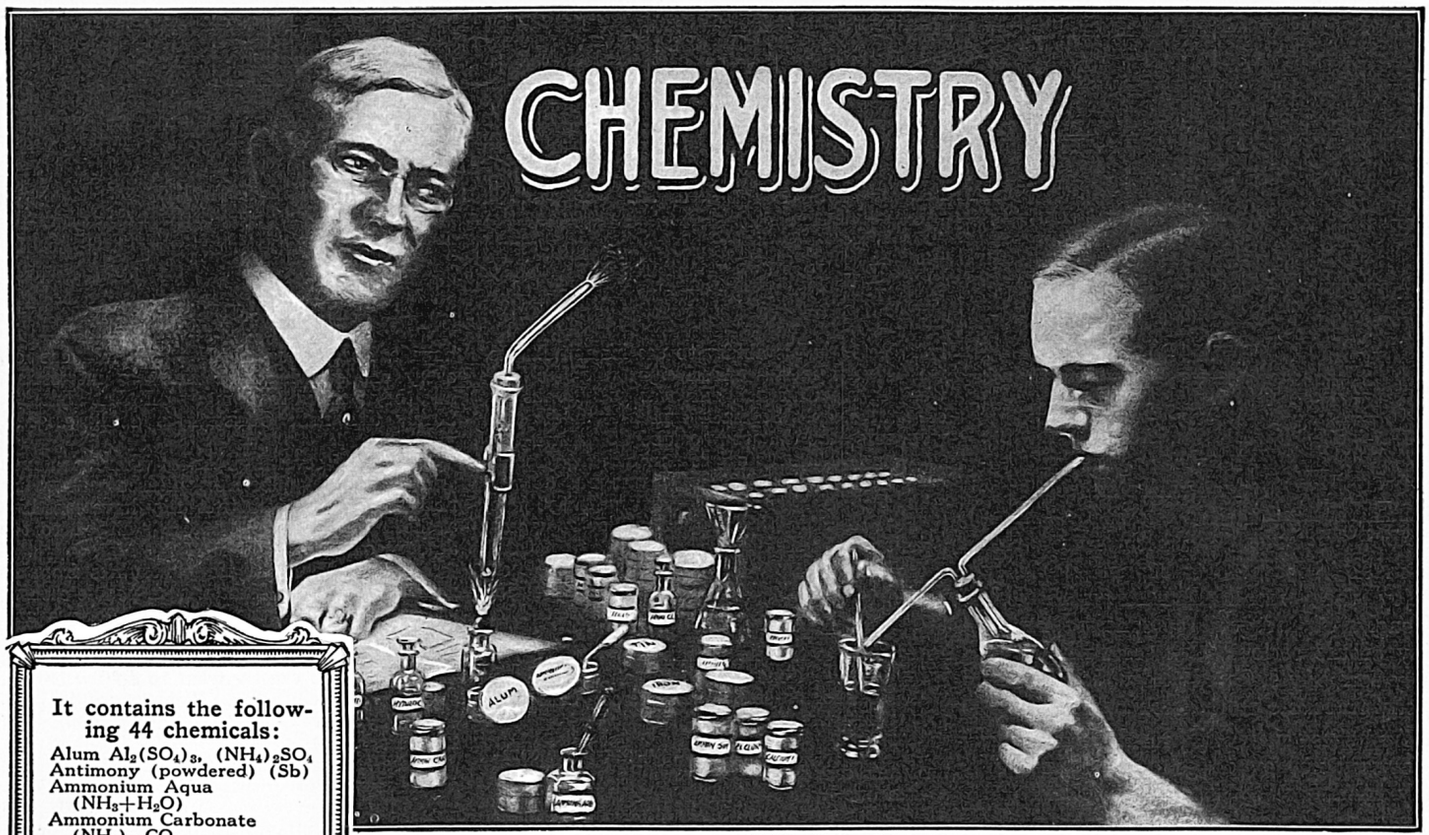

"The Joy of Father and Boy."

It contains the following 44 chemicals:

Alum $Al_2(SO_4)_3$, $(NH_4)_2SO_4$
Antimony (powdered) (Sb)
Ammonium Aqua (NH_3+H_2O)
Ammonium Carbonate $(NH_4)_2\ CO_3$
Ammonium Chloride (NH_4Cl)
Ammonium Sulphate $(NH_4)_2\ SO_4$
Barium Chloride $(BaCl_2)$
Boric Acid (H_3BO_3)
Brimstone (Sulphur) (S)
Calcium Chloride $(CaCl_2)$
Calcium Oxide (CaO)
Calcium Sulphate $(CaSO_4 2H_2O)$
Charcoal (Carbon) (C)
Chloride of Zinc $(ZnCl_2)$
Copper Sulphate $(CuSO_4)$
Ferrous Sulphate $(FeSO_4)$
Ferrous Sulphide (FeS)
Glycerol (Glycerine) $C_3H_5(OH)_3$
Hydrochloric Acid (HCl)
Iodine (I)
Iron Chloride $(FeCl_2)$
Iron Oxide (Fe_2O_3)
Lead Acetate Pb $(C_2H_3O_2)_2$
Litmus Paper
Magnesium Carbonate $(MgCO_3)$
Manganese Dioxide (MnO_2)
Mercury (Quicksilver) (Hg)
Nickel Chloride $(NiCl_2)$
Oxalic Acid $(H_2C_2O_4)$
Sodium Bicarbonate $(NaHCO_3)$
Sodium Borate $(NaBO_2)$
Sodium Carbonate (Na_2CO_3)
Sodium Chloride (NaCl)
Sodium Nitrate $(NaNO_3)$
Sodium Phosphate (Na_2HPO_4)
Sodium Sulphate (Na_2SO_4)
Sodium Sulphite (Na_2SO_3)
Stannous Chloride $(SnCl_2)$
Sulphate of Nickel $(NiSO_4)$
Sulphate of Zinc $(ZnSO_4)$
Sulphuric Acid (H_2SO_4)
Tin (Granulated) (Sn)
Zinc (Metal) (Zn)
Zinc Carbonate $(ZnCO_3)$

The following apparata are furnished:

One Standard Washbottle
One Alcohol Lamp
One Conical Glass Measure
One Erlenmeyer Flask
One Glass Funnel
One Delivery Tube
Six Assorted Test-Tubes
One Test-Tube Holder
Ten Sheets of Filter Paper
One Glass Dropper
One Spoon Measure
Glass Tubing
One book containing Treatise on Elementary Chemistry and 100 Chemical Experiments to be performed with this outfit.

"ELECTRO"
Chemical Laboratory

We present herewith to our friends our new **E. I. Co. Chemical Laboratory** which contains **real** chemicals and apparata to perform **real** chemical experiments. This outfit is not a toy, put up merely to amuse, but a practical laboratory set, with all the chemicals, apparata and reagents necessary to perform real work and to teach the beginner all the secrets of inorganic chemistry. With this outfit we give free a book containing a **Treatise in Elementary Chemistry, useful data and recipes, and 100 instructive and amusing experiments.**

DESCRIPTION OF THE OUTFIT:

The outfit consists of forty-four (44) Chemicals all C. P. (chemical pure) put up in appropriate wooden boxes, glass bottles, and hermetically closed jars. The acids are put up in glass bottles, with ground-in glass stoppers and there is a sufficient quantity of chemicals supplied (mostly one to two ounces) enough to make dozens of experiments with each. See list of Chemicals herewith.

The apparata furnished are all of the best obtainable make and of standard laboratory size and shape. A list of the 17 pieces of apparata furnished with this outfit is printed also herewith.

The Instruction book is a real **Chemistry Course for the Beginner.** Some of the Contents are: **Division of Matter:** This is a Treatise on Elementary Chemistry and deals with the theory of the Elements, Molecules and Atoms, etc. **Chemical Nomenclature.** This explains in simple language the derivation of the chemical names of the Elements and their compounds. There is a chapter on **Laboratory Operations; Glass Working; First Aid; Fire Extinguishers; Experimenters' Aphorisms,** etc.

A good part of the book is devoted to Weights and Measures. The Metric System, the English system and the U. S. System are fully explained.

The following tables are furnished: Symbols and Atomic weights of the Elements; Measures of Weights, Volume, Capacity and Length; Per Cent solutions; Conversion of Measure expressed in parts; Poisons and their antidotes; Technical and common name of chemical substances; Formulas for Cleaning various substances, etc., etc.

Among the **100 Experiments** are:

How to make chemical tricks; How to make invisible and magic inks; How to test flour; How to test soil; How to Make Chlorine Gas and smoke (German War Gas); How to bleach cloth and flowers. How to produce Oxygen and Hydrogen; How to make chemical colors; How to test Acids and Alkalies and hundreds of interesting hints and formulas.

The price is still $5.00

Shipping Weight 10 lbs.

(Can be shipped by Express only.) Send your order today to:

TRADE MARK **THE ELECTRO IMPORTING CO., Mfrs.** TRADE MARK
231 FULTON STREET NEW YORK CITY

See our full page Ad, on page 182 for Free Cyclopedia

How I Stopped Forgetting In One Evening

How in One Evening I Discovered the Secret of a Good Memory and in Six Months Increased My Business One Hundred Thousand Dollars

By William Gerard

WHO would ever have thought that a $100,000 increase in my business would come from a simple secret learned in one evening. And yet, that is just what happened. I look back on it today, and can hardly believe that it is only six short months since I learned from David M. Roth, the famous memory expert, how to make my memory do wonderful things that I never before dreamed possible.

I consider the evening I met Mr. Roth one of the most momentous in my life. It was at a dinner of the Seattle Rotary Club. Mr. Roth was present and started his exhibition by asking sixty of those present to introduce themselves to him by name. Then he requested a gentleman at the blackboard to write down names of firms, sentences and mottos on numbered squares, meanwhile sitting with his back to the writer. After this, he was asked by various Rotarians to tell what was written down in the specific squares. Mr. Roth gave the entire list without a mistake. After finishing with this, Mr. Roth singled out and called by name the sixty men to whom he had been introduced earlier, and who in the meantime had changed seats and mixed with others present.

After the meeting, I was introduced to Mr. Roth by a mutual friend, and congratulated him upon his marvelous feats of memory. To my surprise, Mr. Roth said, "Why, Mr. Gerard, such things are nothing at which to marvel. Anyone can do these things and even greater things with his memory. A good memory is not a gift. Any person of average intelligence can easily develop his memory. I, myself, am an example of this fact. As a young man my memory was so poor I could hardly remember a man's face or name 20 seconds. I soon realized that this bad memory would scare away any chance I had for success. Right then and there I determined to improve my memory. And now, after 20 years of attention to the subject, I feel that I can do as much for other people's memories as I have done for my own. I have recently finished work on a simple and practical course through which anyone can improve his memory until it becomes a veritable sponge for absorbing facts, faces, names and all the information one wants to remember. This course contains all of my secrets and principles. If you will write to my publishers in New York, the Independent Corporation, you can make arrangements for examining the course without charge."

Needless to say I wrote the Independent Corporation, asking to examine the course. In a few days I received the seven lessons together with a little booklet of letters from many men telling what they had already done through the aid of the course. It was very encouraging for me to read the letter from C. Louis Allen, who at the age of thirty-two became president of the million dollar Pyrene Manufacturing Company, and is now the president of the Sales Company bearing his name.

"Now (says Mr. Allen) that the Roth Memory Course is finished I want to tell you how much I have enjoyed the study of this most fascinating subject. Usually these courses involve a great deal of drudgery, but this has been nothing but pure pleasure all the way through. I have derived much benefit from taking the course of instruction and feel that I shall continue to strengthen my memory. That is the best part of it. I shall be glad of an opportunity to recommend your work to my friends."

You may be sure that after reading the balance of the letters telling of *real results*, I went right at the course that very evening. I expected to find the lessons "brain breakers", but to my surprise, the Roth Course was as easy and fascinating as a game. I hated to put it by that evening and surprised my wife by repeating backwards, forwards and all ways fifty words of all sorts. My wife could not understand how a person with a memory so poor as mine could do such a thing after only about one hour's study. But the course gives the secret of a good memory *right at the start.* I played the memory improving game for a few minutes each evening for a month. And the further I got the more fascinating the game became. Long before a month was up I had amazed my family and my friends on a number of occasions by various memory feats, and to them the astounding difference in my memory was nothing short of a miracle.

And now, my memory behaves so efficiently that my business has felt the impetus of my increased mind power and has responded in a joyously lucrative fashion. Within the last six months my sales have jumped up $100,000—*with no "war-baby" or external force to boost my business.*

The reason I know that my business expansion is due to my own increased power is that I seem to have a new grip upon affairs. I employ old facts and experiences, give them a new twist and have thereby revitalized my business methods. I now remember and apply all that I have heard other people have learned. Nothing slips my mind that can be used to some business advantage. I find and store in my new, iron-bound memory real nuggets of facts and experiences that other people casually let drop. When a condition arises, I just seem to open a certain drawer of my mind, then take out and marshal together all facts and precedents that I have learned. My memory has become an ally that never fails to help me push my business ahead "on high."

I now seize many golden opportunities that before would have slipped by and been out of reach by the time I woke up.

You see the Roth Course has done vastly more for me than merely teach me how to remember names and faces, telephone numbers, etc. It has done more than make me a more interesting talker. It has done more than give me confidence in myself.

Mr. Roth's Course has endowed me with new business perspective. It has made me a keener observer. It has given me a new sense of proportion and values. It has given me visualization—which after all is the true basis of business success.

I feel that I owe the Roth Memory Course a great debt—in fact, a $100,000 debt. I feel that telling my story to the readers of The Electrical Experimenter Magazine is only a small payment for what the course has done for me. Any power that can increase a man's business $100,000 and increase his mind power 90% deserves that man's sincere and truthful endorsement. I *know* that this is what the Roth Memory Course has done for me and for my business. Not alone am I happy to be able to tell my story as it happened, but I am gratified to know that anyone can do the same thing. A mere glance over the first lesson will show that there is a course, not for "high brows" who love to bathe in theory, but practical and easy instructions for every man, woman or child, who knows the enormous value of a good substantial memory. This same hand of mine that gave out $5 for the Roth Course took in $100,000 as a result, and in telling my experience, I feel that in a small way, I am repaying the great debt that I owe to the David M. Roth Memory Course.

WILLIAM GERARD.

AMAZING MEMORY FEATS

Any man, woman or child of average intelligence can easily and quickly acquire a sure and exact memory.

When David M. Roth, the famous expert, first determined to cultivate his memory he did it because he had a poor memory. He actually could not remember a man's name twenty seconds. He forgot so many things, that he knew he could not succeed unless he did learn how to remember.

Today there are over ten thousand people in the United States whom Mr. Roth has met at different times—most of them only once—whom he can name instantly on sight. Mr. Roth can, and has, hundreds of times at dinners and lectures, asked from fifty to one hundred people to tell him their names and telephone numbers, and business connections, and then, after turning his back while they changed seats, has picked each one out by name and told him his telephone number and business.

These are only a few of the scores of other equally "impossible" things that Mr. Roth does—and yet a few years ago he could not remember a man's name twenty seconds. You too can do these wonderful things.

SEND NO MONEY

So confident is the Independent Corporation, the publishers of the Roth Memory Course, that once you have an opportunity to see in your own home how easy it is to double, yes triple your memory power in a few short hours, that they are willing to send the course on free examination.

Don't send any money. Merely mail the coupon or write a letter and the complete course will be sent, all charges prepaid, at once. If you are not entirely satisfied send it back any time within five days after you receive it and you will owe nothing. On the other hand, if you are as pleased as are the thousands of other men and women who have used the course, send only $5 in full payment. You take no risk and you have everything to gain, so mail the coupon or a letter now before this remarkable offer is withdrawn.

Independent Corporation

Publishers of The Independent Weekly

Dept. R-1106 **119 West 40th St., New York**

Please send me the Roth Memory Course of seven lessons. I will either remail the course to you within five days after its receipt or send you $5 in full payment of the course.

Name .....

Address .....

El. Exp. 6-19

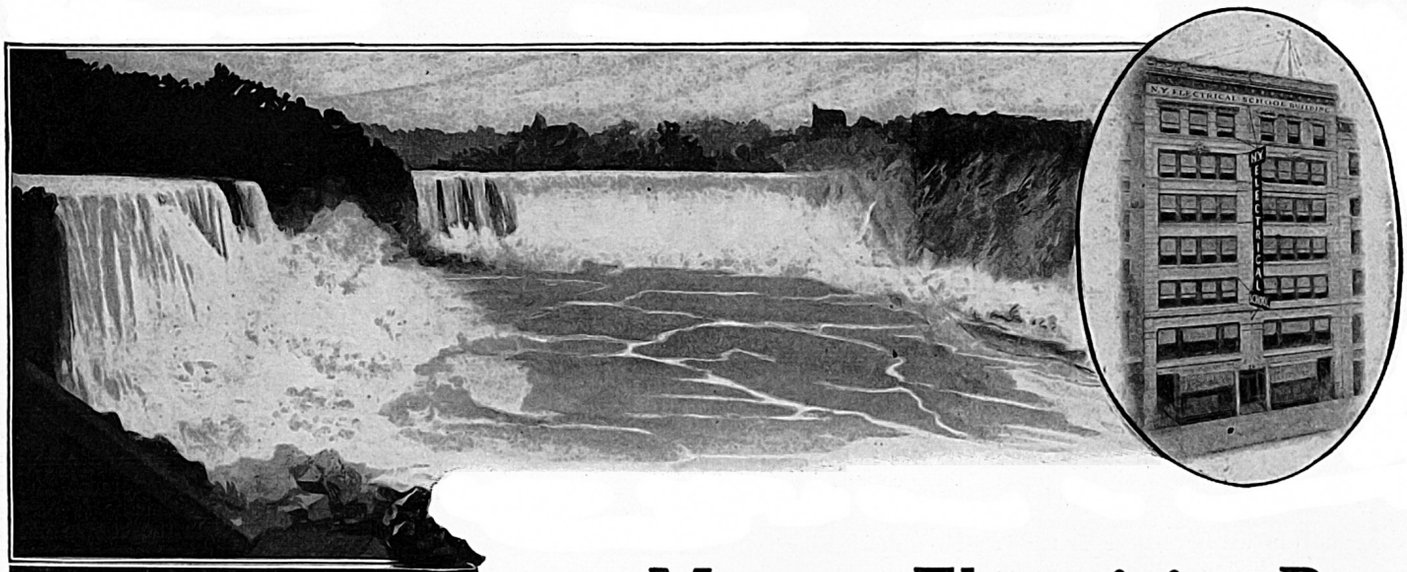

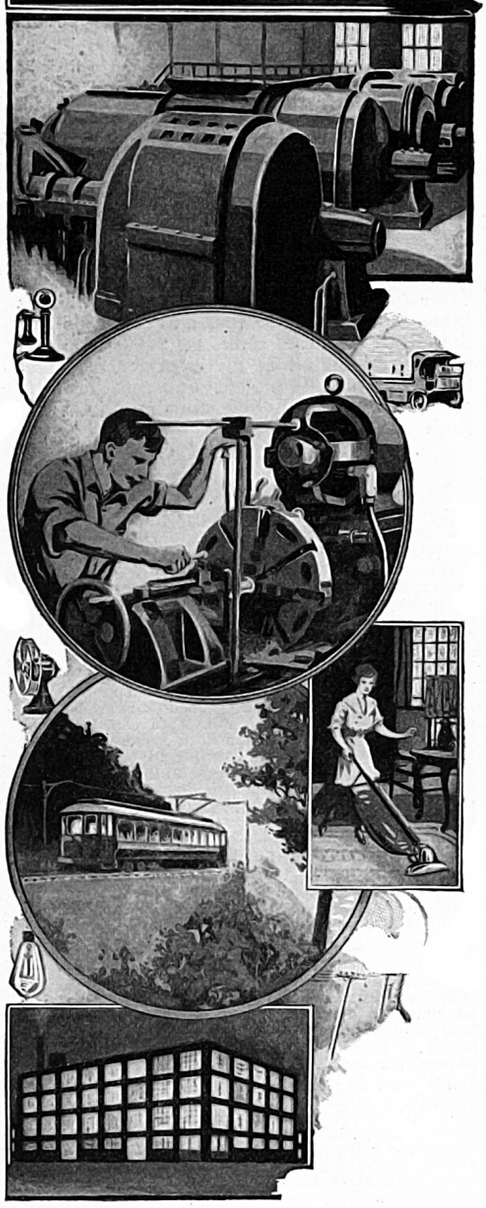

Master Electricity By Actual Practice

The only way you can become an expert is by doing the very work under competent instructors, which you will be called upon to do later on. In other words, *learn by doing.* That is the method of the New York Electrical School.

Five minutes of actual practice properly directed is worth more to a man than years and years of book study. Indeed, Actual Practice is the only training of value, and graduates of New York Electrical School have proved themselves to be the only men that are fully qualified to satisfy EVERY demand of the Electrical Profession.

The Only Institution of the Kind in America

At this "Learn by Doing" School a man acquires the art of Electrical Drafting; the best business method and experience in Electrical Contracting, together with the skill to install, operate and maintain all systems for producing, transmitting and using electricity. A school for Old and Young. Individual instruction.

Over 5,500 Graduates are Successful Men in the Electrical World

No previous knowledge of electricity, mechanics or mathematics is necessary to take this electrical course. You can begin the course now and by steady application prepare yourself in a short time. You will be taught by practical electrical experts with actual apparatus, under actual conditions.

Let us explain this course to you in person. If you can't call, send now for 64-page book—it's FREE to you

New York Electrical School
29 W. 17th St., New York, N. Y.

Please send FREE and without obligation to me your 64-page book.

_____(NAME)

_____(ADDRESS)

New York Electrical School

29 West 17th Street, New York

ELECTRICAL EXPERIMENTER

H. GERNSBACK – EDITOR
H. W. SECOR – ASSOCIATE EDITOR

Vol. VII. Whole No. 74 JUNE, 1919 No. 2

Listening to Theater Critics

WE of the present generation have seen the dictograph or supersensitive telephone, applied to almost every purpose imaginable, from listening to the whispered machinations and plottings of criminals to the honeyed words of the philanderous husband making love to a chorus girl.

But now comes the very latest application of the dictograph, for the purpose of overhearing the criticisms of theater audiences, and it took Chicago to show us the way. In that city there is a large motion-picture theater completely equipt with dictograph transmitters or microphones, liberally sprinkled thruout the auditorium, so that the manager, by means of a small switchboard installed in his private office, may overhear the conversations, caustic or otherwise, regarding Bessy Tinkletoes and the merits and demerits of the corseted leading man, not to mention the "villiun" and the dashing, smashing "soubrette."

The *microphones* or sound-detecting apparatus, camouflaged so as to be invisible, are secured on the backs of the various chairs in the orchestra or balcony, and are connected up with separate wires leading to a switchboard in the manager's office, so that as the switch is turned, the respective microphones are switched into circuit alternately. The current modulations set up by even a whisper several feet away from one of these microphones act on a loud-speaking telephone at the manager's desk. It is also possible to connect up such apparatus with a set of head receivers strapt to the ears, the same as in the regular dictaphone sets used by crime investigators, after the fashion made famous by Detective Burns and other defenders of the common law.

Not only is it possible with such an arrangement to place microphones or sound detectors on the backs of seats in the auditorium, but they may be placed in the boxes behind portieres, and in many other advantageous and inconspicuous positions. It is rather difficult to conceal them in the foyer, but by a little clever subterfuge and ingenuity exercised by the engineers having charge of the installation, this problem is quite easily solved. For instance, an old trick of the showman may be put into play, namely, that to allay suspicion on any trick, you must convince the public that everything is apparently as it seems; and bearing in mind P. T. Barnum's famous lines—"The public likes to be fooled," and "There's one born every minute," we proceed in the present case to do a little fooling of the public ourselves, and thusly do we do it; by placing the microphones in a series of small ornamental horns about the lobby, in the bases of which there are also arranged loud-speaking telephone devices. Before the performance and during intermissions, when the foyer and lobby

(*Continued on page* 162)

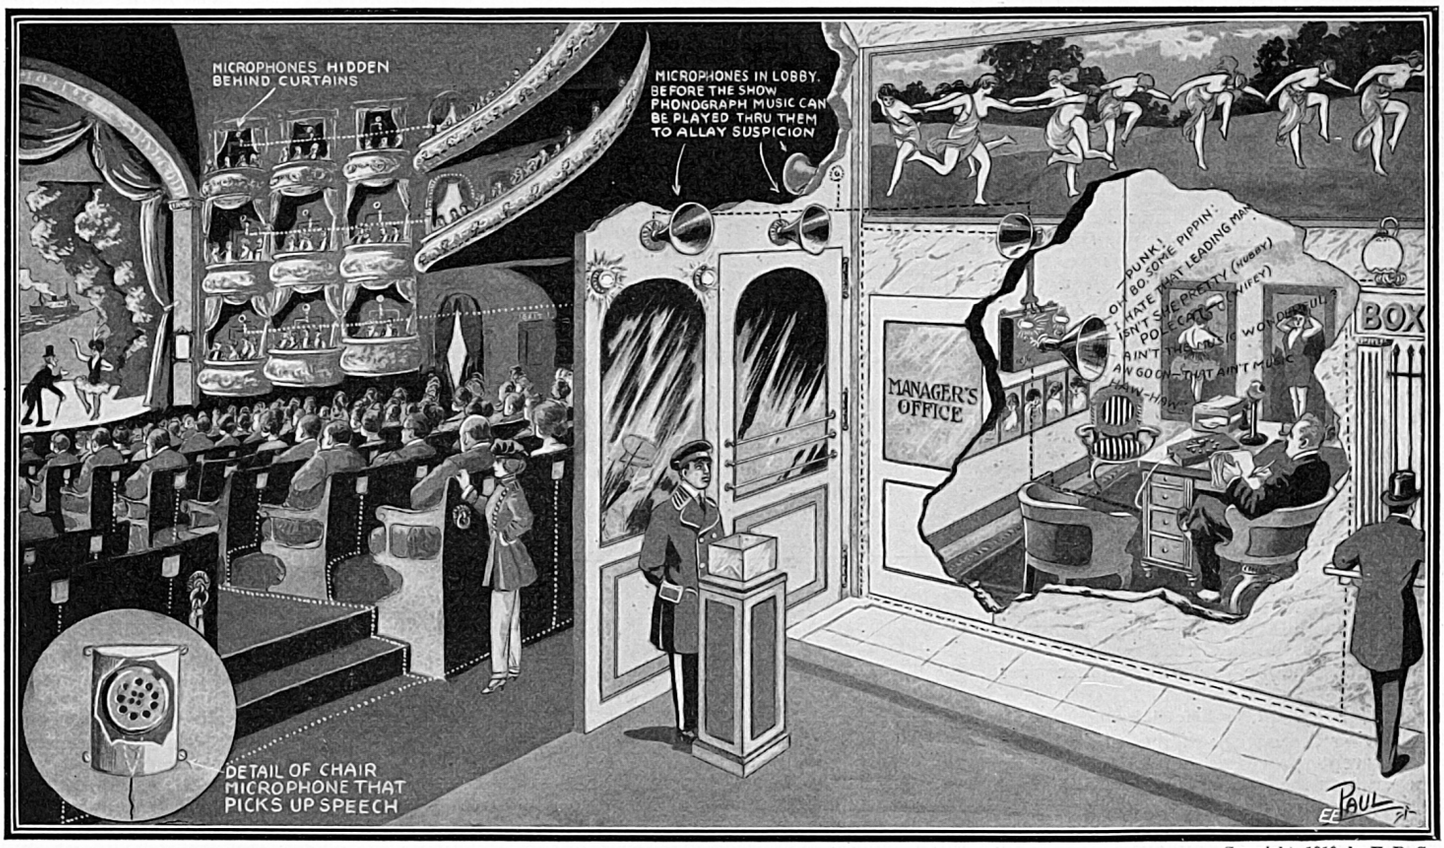

Copyright, 1919, by E. P. Co.

A New Idea Tried Out in a Chicago Theater—Eavesdropping on the Critics in the Audience. The Remarks of These Self-appointed Dramatic Critics Prove Very Valuable to the Enterprising Theater Manager, As a Failing Show May Be Revised and Strengthened So As to Make a Real "Hit." The Super-sensitive Microphone or "Dictograph" Solves the Problem—the Instruments, Distributed Thruout the Auditorium, Can Be Switched Onto a "Loud-talking Reproducer" in the Manager's Office, in Any Order Desired.

Electric Drive on U. S. S. "New Mexico"

By CHARLES M. RIPLEY

THE battleship *New Mexico* is the pride of the United States Navy, and her electric drive is the pride of the *New Mexico*. How the electrical machinery looks, how it works, why the electric drive is preferable to other forms of propulsion, how she looks inside and outside, is here related by one of the men who recently was a passenger on Uncle Sam's latest superdreadnaught, riding between the Brooklyn Navy Yard and Rockland, Maine.

This latest leviathan weighs 32,000 tons and requires 32,000 horsepower or *one horsepower per ton.* Her weight is equivalent to a bar of iron weighing one pound to the foot and forming a band of iron from the North to the South Pole with enough in addition to reach from Maine almost to the borders of Florida. She is so huge that it requires ten tugs to push her from her pier in Brooklyn Navy Yard out into the East River. From the platform called the "crow's nest" at the top of the mast down to the level of the water is 120 feet, or equal in height to a ten-story building.

The battleship can generate enough electricity to run the giant General Electric Works and the Schenectady Railway Company.

Motors Drive Propellers.

Like everything else that is electrical, the *New Mexico* is the cleanest institution of her kind. There are no engines or turbines connected with the propeller shafts—only electric motors. There are no grates under the boilers—merely oil burners. There is not a coal or ash shovel on the ship; nor are there any cinders, smoke, dust, or soot.

The *New Mexico* "coals" thru a 6-in. hose, that is because she burns only oil for her power. The total oil capacity of the dozen or more compartments is 3,400 tons or 6,800,000 lbs., or nearly a million gallons. If the *New Mexico* were an automobile with a mileage of 20 miles per gallon, this amount of oil would drive her close to 20 million miles or a distance equal to 80 times to the moon. But a 32,000-ton battleship does not equal the mileage of a flivver, for it weighs as much as 60,000 of those vehicles, and must plow thru the water displacing her own weight of water each time she runs her own length, 624 feet. The cost of fuel is more important on ship board than on land, and this is emphasized by the fact that on the 2,000-mile trial trip alone she will displace over 620,000,000 tons of water.

From Oil to Electricity.

Following the energy of the oil fuel thru the different processes until this energy drives the propellers electrically is an entertaining and instructive trip. Escorted by courteous officers, you start for one of the three boiler rooms. You must open and close several steel bulkheads in the watertight compartment and descend steel ladders and steel steps apparently equivalent to those in a five-story building. On the way down you must pass thru an "air lock" similar to those which give the excavators access to the caissons used in building the foundations of the skyscrapers 90 feet under Broadway, or in constructing the piers under big bridges in the middle of the river. The officer who escorts you is very careful to close the steel door behind you before he opens the one in front of you.

High Air Pressure.

No sooner are the bolts loosened than you feel the increased air pressure swish into your ears. This is because the air in the fire-room is maintained at a higher pressure than the outside air. All the air which the firemen breathe is pumped air. There is more oxygen in a cubic foot of this air than there is in ordinary air. This increased pressure and increased oxygen are both useful in providing the proper combustion in the boiler.

How Smoke Screens Are Made.

If the *New Mexico* wishes to throw a smoke screen, the men in the fireroom merely turn a few tiny hand valves in a ¼-in. pipe and, presto! inky blackness will vomit from the single smoke stack and blacken vast sea areas. This is a very nice study of how different mechanical mixtures of oil and air will bring about different chemical combinations between oil and oxygen. One of these combinations eliminates smoke by effecting almost perfect combustion; while the other creates a heavy black smoke which will practically blindfold the enemy. And three little ¼-in. pipes in each boiler are all that is needed to do this.

THE day of the all-electric superdreadnaught, not to mention electrically driven war vessels and merchant ships of smaller size, has arrived. In the present article Mr. Ripley gives us an interesting authoritative description of his trip on Uncle Sam's latest superdreadnaught, the "New Mexico", with her 32,000 horse-power electric propelling plant. Like everything else that is electric, the "New Mexico" is the cleanest institution of her kind. There are no engines or turbines directly connected with the propelling shafts—only powerful electric motors. There are no grates under the boilers—merely oil burners. Electrical propulsion not only does away with reversing turbines, but also does away with reduction gears, with their accompanying mechanical loss. The battleship "New Mexico" can travel a distance of 7,500 knots at 12 knot speed before it will be necessary to take on more fuel. The electric equipment totals nearly 100,000 horsepower, including over 100 loud speaking telephones, nearly 200 electric fans, electric gyroscopic compasses, and in fact "Electricity" rules the day everywhere about this modern naval wonder.

Size of Boilers.

It is said that no other 32,000-ton battleship has as few as nine boilers. There are three boiler rooms, each in a separate compartment, and each room contains three large boilers. Each of these nine boilers can deliver over 4,000 horsepower and contains three miles of 2-in. seamless pipes. Put end to end the pipes in all nine boilers would make a seamless tube 27 miles long. The Pennsylvania has 12 boilers and the Oklahoma has 12, altho its tonnage is only 27,500.

The history of the steam engine shows that its inventor, James Watt, thruout his entire life opposed any steam pressure higher than 5 to 10 lbs. per square inch. The *New Mexico's* boilers supply *steam at 250 lbs. per square inch!*

Superheated Steam.

After the steam is generated, and has past thru the big pipe away from the water in the boiler, it is again brought in contact with the flames of the furnace and is superheated to a still higher temperature. In fact, as the steam leaves the boiler it is about 450° F., or hot enough to melt solder and tin.

Superheated , steam gives super-results. This is because the steam turbine is clast among engineers as a "heat engine" and the more heat that is supplied in this steam the more energy is available for power.

Two Power Plants.

For propulsion there are two electric power plants in separate compartments. They are way down low in the *New Mexico* close to the boilers. Each of these power plants alone is able to drive the battleship at a speed of 18 knots. (A nautical mile, or knot, is 6,080 feet, as against 5,280 feet in a land mile.)

Turbine Electric Plant.

In two separate steel compartments 15 by 45 ft. are located the two turbine generator sets, each not over 27 ft. long. The turbine itself is little larger than a hogshead of molasses laid over on its side. It seems almost incredible that this small machine can generate 16,000 horsepower from steam.

The engine rooms of most ships of the past have been a tangle of bending and curving pipes, and in order to move about the men had to stoop down to go under them or climb over them or squeeze between them. When one of these pipes burst it practically meant the death of every man in the engine room. One of the advantages of these power plant rooms in the *New Mexico* is the fact that there is only one steam pipe in the room, and that is only 16 ft. long.

Steam Turbine.

In each of these two power plants the steam turbines make electricity for driving the battleship. From the outside the most interesting thing about these wonderful rotary steam engines, called turbines, is their small size, their light weight, and the fact that they are so perfectly enclosed that you cannot see anything move. A turbine of 16,000 horsepower when compared in size and weight with the great triple and quadruple expansion steam engine that had been used up until recent years, is practically a watch charm—a little toy. There is only rotary motion in the steam turbine.

Inside the casing are ten wheels arranged side by side like the coins are kept in a bank. In the rims of all of these wheels are hundreds of buckets against which the steam strikes. The steam enters at one end of the turbine and dashes against the buckets of each of these wheels, one after the other; and as it strikes against these buckets the wheels and the shaft to which they are fixt all turn around. This shaft drives the electric generator immediately adjacent, and in it the mechanical power is turned into electricity. Then eight copper wires only slightly larger than a garden hose convey the 16,000 horsepower thru the steel walls to the next compartment where the switchboard is located. Electric fans in the power plant ventilate the room and also *cool the generator,* and the heated air is pumped outside.

The Switchboards.

When the eight electric wires leave the power plant room, they go to the electric switches back of the switchboard. Here the ship is controlled upon receipt of in-

(*Continued on page* 183)

WORLD'S FIRST ELECTRIC DRIVEN SUPERDREADNAUGHT—THE U. S. S. "NEW MEXICO." DISPLACEMENT, 32,000 TONS; HORSE-POWER, 32,000; BOILERS, OIL-BURNING; SPEED, 21 KNOTS.

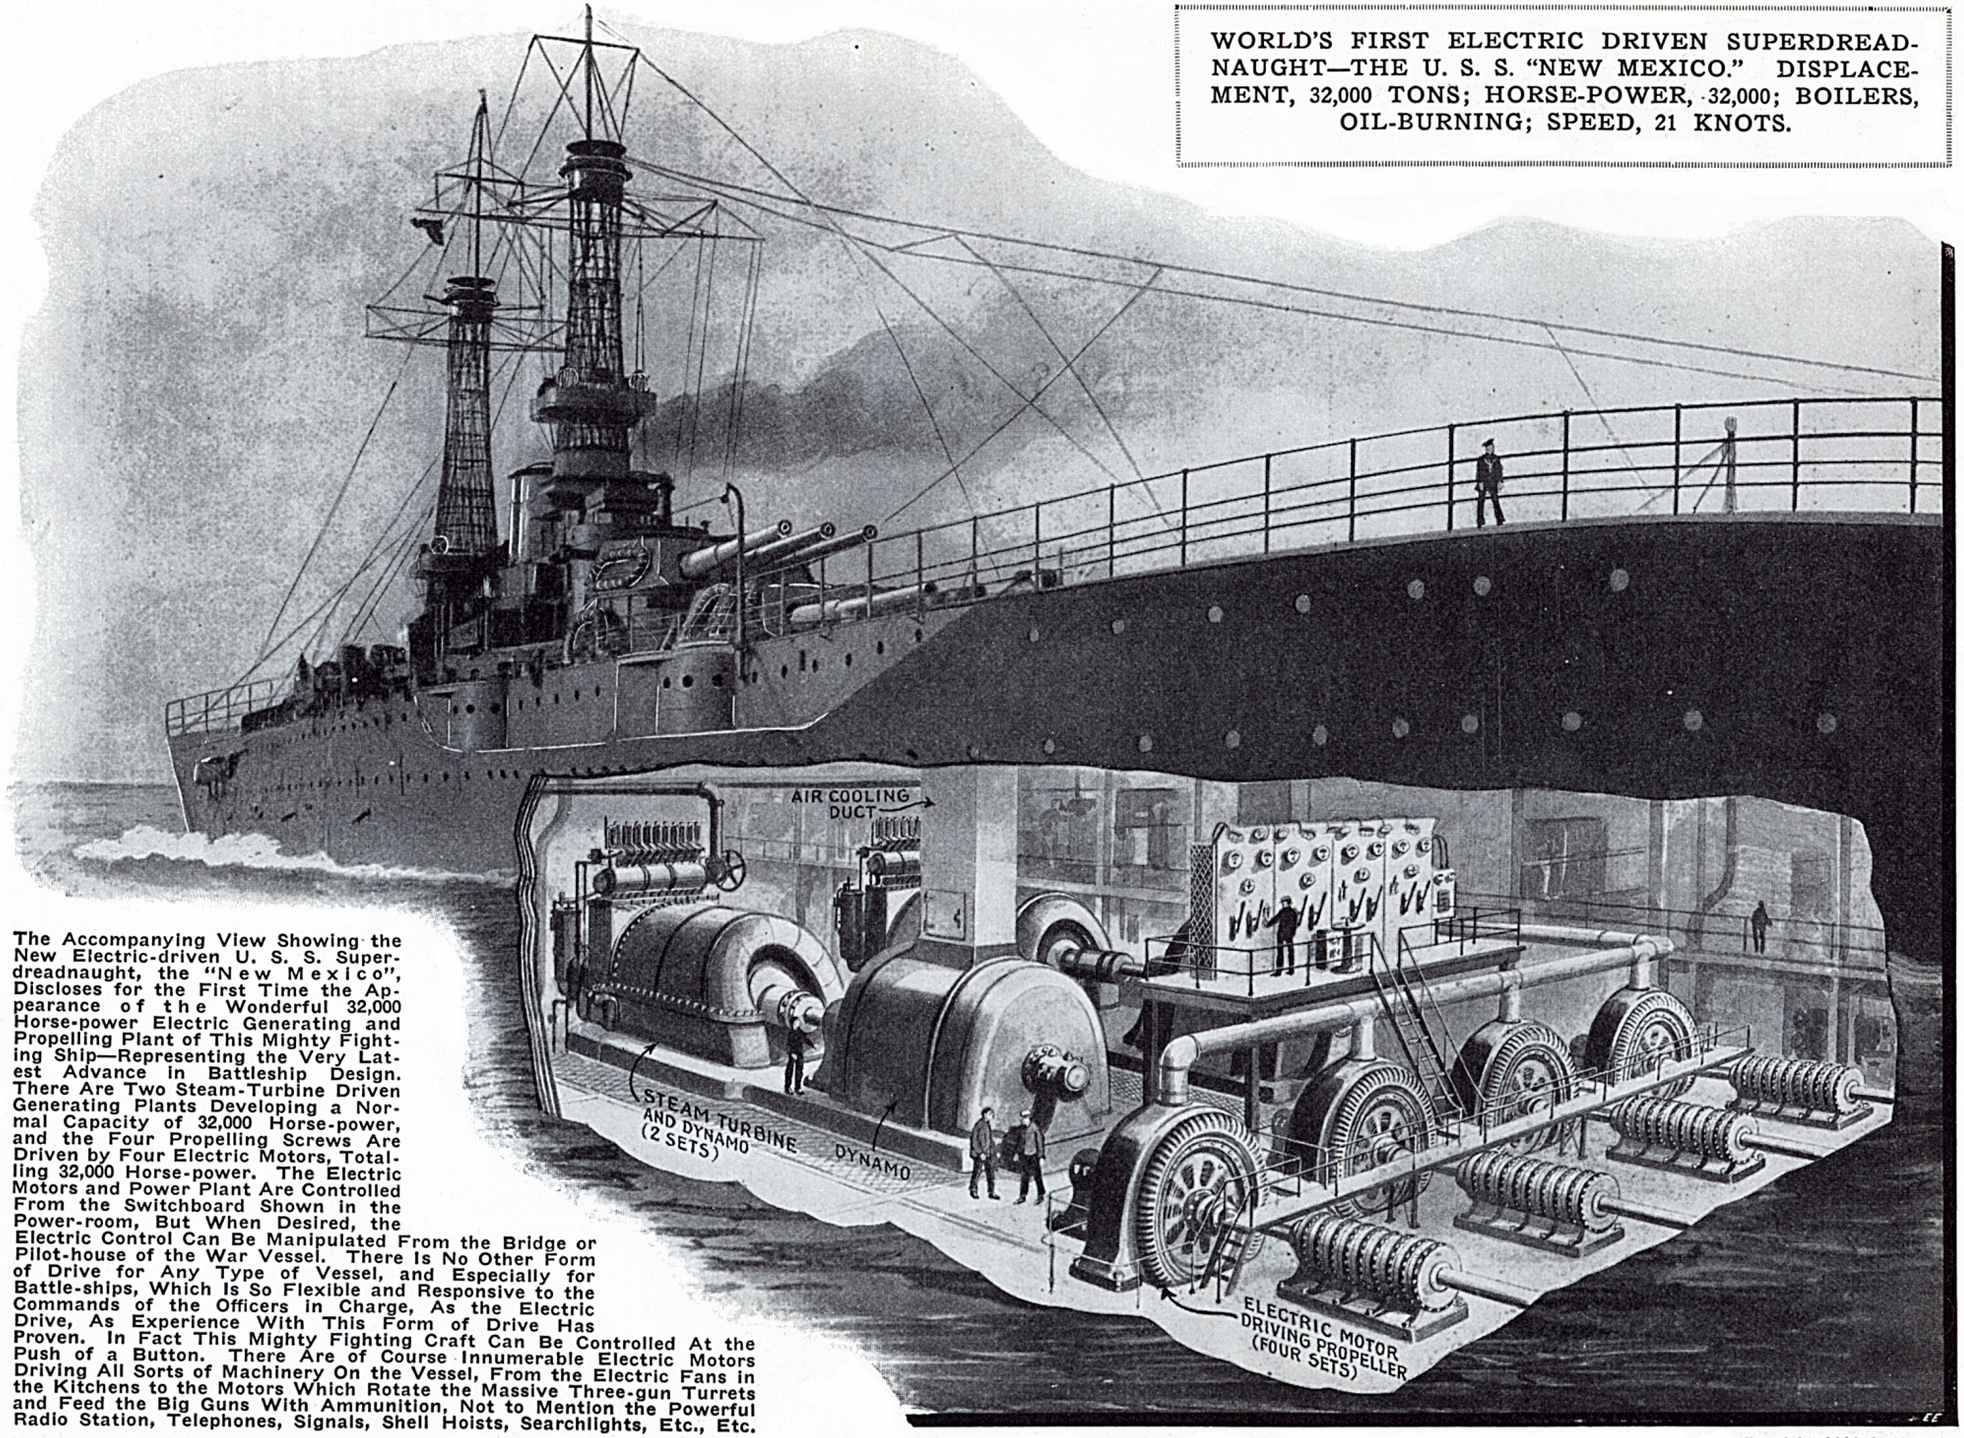

The Accompanying View Showing the New Electric-driven U. S. S. Superdreadnaught, the "New Mexico", Discloses for the First Time the Appearance of the Wonderful 32,000 Horse-power Electric Generating and Propelling Plant of This Mighty Fighting Ship—Representing the Very Latest Advance in Battleship Design. There Are Two Steam-Turbine Driven Generating Plants Developing a Normal Capacity of 32,000 Horse-power, and the Four Propelling Screws Are Driven by Four Electric Motors, Totalling 32,000 Horse-power. The Electric Motors and Power Plant Are Controlled From the Switchboard Shown in the Power-room, But When Desired, the Electric Control Can Be Manipulated From the Bridge or Pilot-house of the War Vessel. There Is No Other Form of Drive for Any Type of Vessel, and Especially for Battle-ships, Which Is So Flexible and Responsive to the Commands of the Officers in Charge, As the Electric Drive, As Experience With This Form of Drive Has Proven. In Fact This Mighty Fighting Craft Can Be Controlled At the Push of a Button. There Are of Course Innumerable Electric Motors Driving All Sorts of Machinery On the Vessel, From the Electric Fans in the Kitchens to the Motors Which Rotate the Massive Three-gun Turrets and Feed the Big Guns With Ammunition, Not to Mention the Powerful Radio Station, Telephones, Signals, Shell Hoists, Searchlights, Etc., Etc.

Copyright, 1919, by E. P. Co.

Recent Aërial Developments

By H. GERNSBACK

In England They Have Already Mooring Towers Used to Take On and Put Off Passengers and Freight, It Having Been Proved That It Is Easier for an Airship to Anchor at a Lofty Height Than to Come Down and Dive Into a Shed. This Illustration Shows How the Woolworth Building or Any Other Building Could Be Equipt With a Revolving Landing Tower, to Which the Airship Can Make Fast. Passengers and Freight Can Then Be Readily Landed. A Project of This Kind Is Entirely Feasible From an Engineering Standpoint.

WHEN the Zeppelin, that is, the rigid type of airship, first appeared it had many inherent faults. Probably the greatest one was the inflammable gas carried in the sectional ballonets.

As fast as the Zeppelins were constructed they were destroyed mostly by fire due to electric sparks, which set on fire the inflammable hydrogen gas.

Secondly, the landing arrangements as used by the Germans were very inefficient, and it was not infrequent that the huge airship became wrecked when coming down to earth prior to entering its mooring shed. In the air, the Zeppelin type is safe enough, and even the severest storms can be ridden out with comparative safety, that is, all storms except electrical storms, which not infrequently set the dirigibles on fire, due to lightning.

Recently, the English have proposed a novel manner for landing passengers, and no longer do the huge airships of the rigid type descend to earth to discharge their passengers or cargo. The device used is a sort of huge hitching post in the form of a high tower held fast by means of cables and stays. The upper part of the tower has a revolving top section with which the nose of the airship comes into contact, and to this it is made fast. The passengers and cargo leave and enter by means of this revolving top and descend or ascend to earth by means of elevators. These towers are anywhere from three to five hundred feet high, and the airship can "land" and make fast to the tower with comparative safety, as has been actually demonstrated in England.

It makes no difference which way the wind blows or how hard, the airship will simply take its position, similar to a wind vane, where it offers the least resistance to the wind. It will ride out the most severe storm very readily in such a position and in comparative safety. This also has been actually demonstrated.

The fire danger is now being reduced entirely by the use of an American idea, helium gas, which has approximately the same lifting power as hydrogen, but which is absolutely non-inflammable.

It does seem that for many years to come the rigid type of airship will probably be the one destined to carry passengers and freight, while for a long time, the airplane will only act as a secondary unit, or as a feeder. In other words, the airship will be used to cover long distances, while the airplane will cover short distances, bringing passengers and freight to the central dirigible depots.

We have today airships with a capacity of 2,000,000 cubic feet of gas, and it will not be long until the 5,000,000 cubic foot gas dirigible will be in use. Aviation authorities think that such airships will be in operation not later than 1923.

When it is considered that the huge present-day English airships have a capacity of 2,000,000 cubic feet of gas, and which can now cover a radius of 4,000 miles without coming down to earth or renewing their supplies, it will be seen that universal aërial transportation is a feature much closer at hand than is realized by most of us.

There is little doubt that before this year has ended one or more dirigibles will have crost the Atlantic Ocean. Flying at their present rate of speed, which is sixty miles per hour, it will be seen that the trip from London to New York will take only 2 to 2½ days. The huge 5,000,000 cubic feet of gas airships will probably fly at the rate of 100 miles per hour. The length of the trip will then be cut down to about 1½ days.

While the aërial tower which we discust above is probably satisfactory, it has many objections, the most important one being that it is an expensive item, and, moreover, if the airship is to rely upon such a structure, it will be almost impossible for it to come down to earth to land passengers *except at such points where the mooring towers are located.* This is a clear disadvantage.

In the accompanying illustration the writer wishes to advance an idea which so far has not been tried out, but which can be readily adapted. The idea is simply to moor the dirigible by means of four cables, which are thrown from the aërial flier. The passengers then will be able to ascend or descend from the airship by means of light elevators operated between the dirigible and earth. These elevators, electrically operated, need not be very heavy and can be constructed of aluminum, duralumin, or some such material. The power to operate these elevators can be taken from the engines of the dirigible itself, and it will be quite an easy matter to take from fifteen to twenty passengers on a single trip.

Our illustration shows the city of London, in the year 1925, with one of these dirigibles made fast to the aërial depot; we see here two elevators operating and taking on passengers and freight. The air-

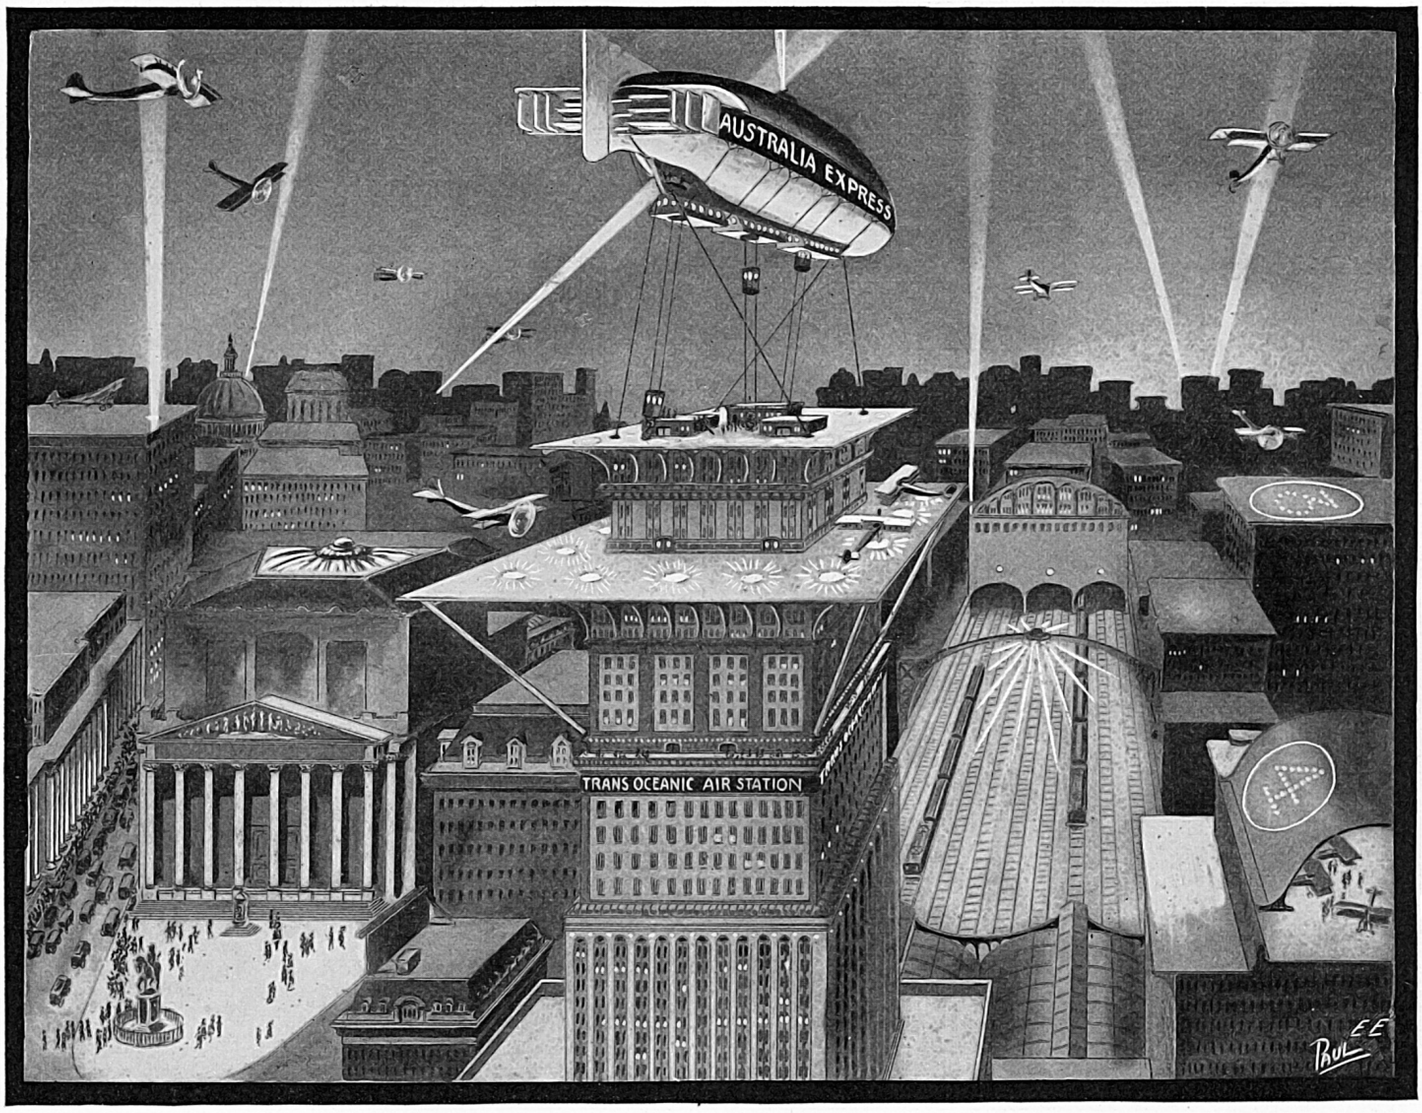

The Heart of London as It Will Appear Very Shortly When the Plans Now Undergoing Completion Are Realized. It Having Been Demonstrated That It Is Very Difficult to Bring Down the Huge Airships to the Ground—Many Zeppelins Having Been Wrecked That Way—It Has Been Proposed to "Land" Airships on Top of Specially Elevated Stations as Here Shown. The Airship would Be Simply Anchored by Means of Four or More Steel Cables. Then, by Using a Number of Light Elevators or Lifts, the Passengers as Well as Freight Can Be Taken on or Put off, as Our Illustration Clearly Depicts. This Is Not a Dream of Tomorrow, but Plans Are Actually Under Way to Make This Feature a Realization. It will Be Seen That the Airplanes Merely Act as a Sort of "Feeder" and They Will Be Used Mostly to Bring Their Passengers or Freight to the Trans-Atlantic Landing Station.

ship shown belongs to the regular trans-Atlantic Service and makes the trip between London and Perth, Australia in 4½ days. Should it become necessary to discharge or take on freight at non-important centers, it will be a simple matter to moor the airship by means of its cables even over a city which has no elaborate landing station. Nothing but four points to which to make the cables fast are required. The elevators which are carried by the airship will do the rest.

Our cover illustration shows a spectacular method of an aërial rescue at sea, which immediately demonstrates the practical use of these elevators. Indeed, the airship does not need to make fast to the wrecked airplane; it will keep its position simply by running either one or more of its propellers in order to keep from drifting. This is quite simple even for the present-day airship, as it is possible by means of its propellers to hover over a certain spot even with a strong wind blowing. In this case, the elevator cables only are made fast to the wrecked flyer, the gasoline tanks of which have been set on fire. After the elevator cables are made fast, it will be a comparatively simple matter to take off the passengers, and, if necessary, the freight, for the buoyancy of the airplane in the water will probably keep it afloat for some time. After everybody is taken off, the elevator is hoisted, the elevator cables pulled in, while the airship proceeds on its way.

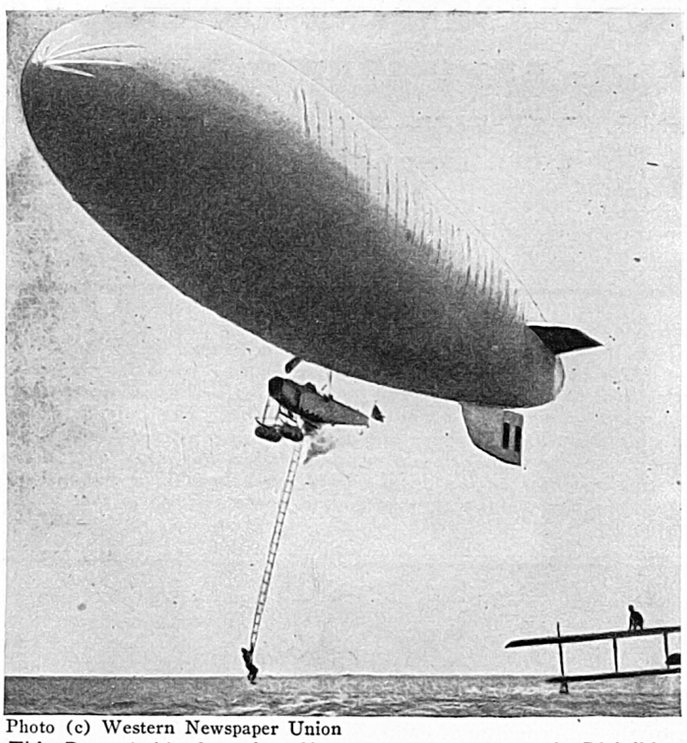

Photo (c) Western Newspaper Union

This Remarkable Snapshot Shows One of Our Navy's Dirigibles Rescuing Two Airmen Who Recently Fell Into the Sea with Their Flying Boat off Key West, Florida. One of the Aviators Can Be Seen Climbing up the Rope Ladder.

This spectacular rescue might seem to be a thing of the future, but indeed it is not. Our photograph herewith shows that the very same thing has already been accomplisht on a smaller scale. Very recently the United States Navy equipt its dirigibles with rope ladders, which made it possible to rescue aviators from the sea. That such a move was indeed wise, our photograph demonstrates better than words. Our remarkable snapshot shows one of the Navy's "blimps" rescuing two airmen who recently fell into the sea with their flying boat off Key West, Fla. The nose of the airship was simply turned into the wind, and after some maneuvering it finally managed to get directly over the disabled flyer. The two marooned airmen experienced no difficulty in grasping the rope ladder and climbing aboard the airship, none the worse for their adventure.

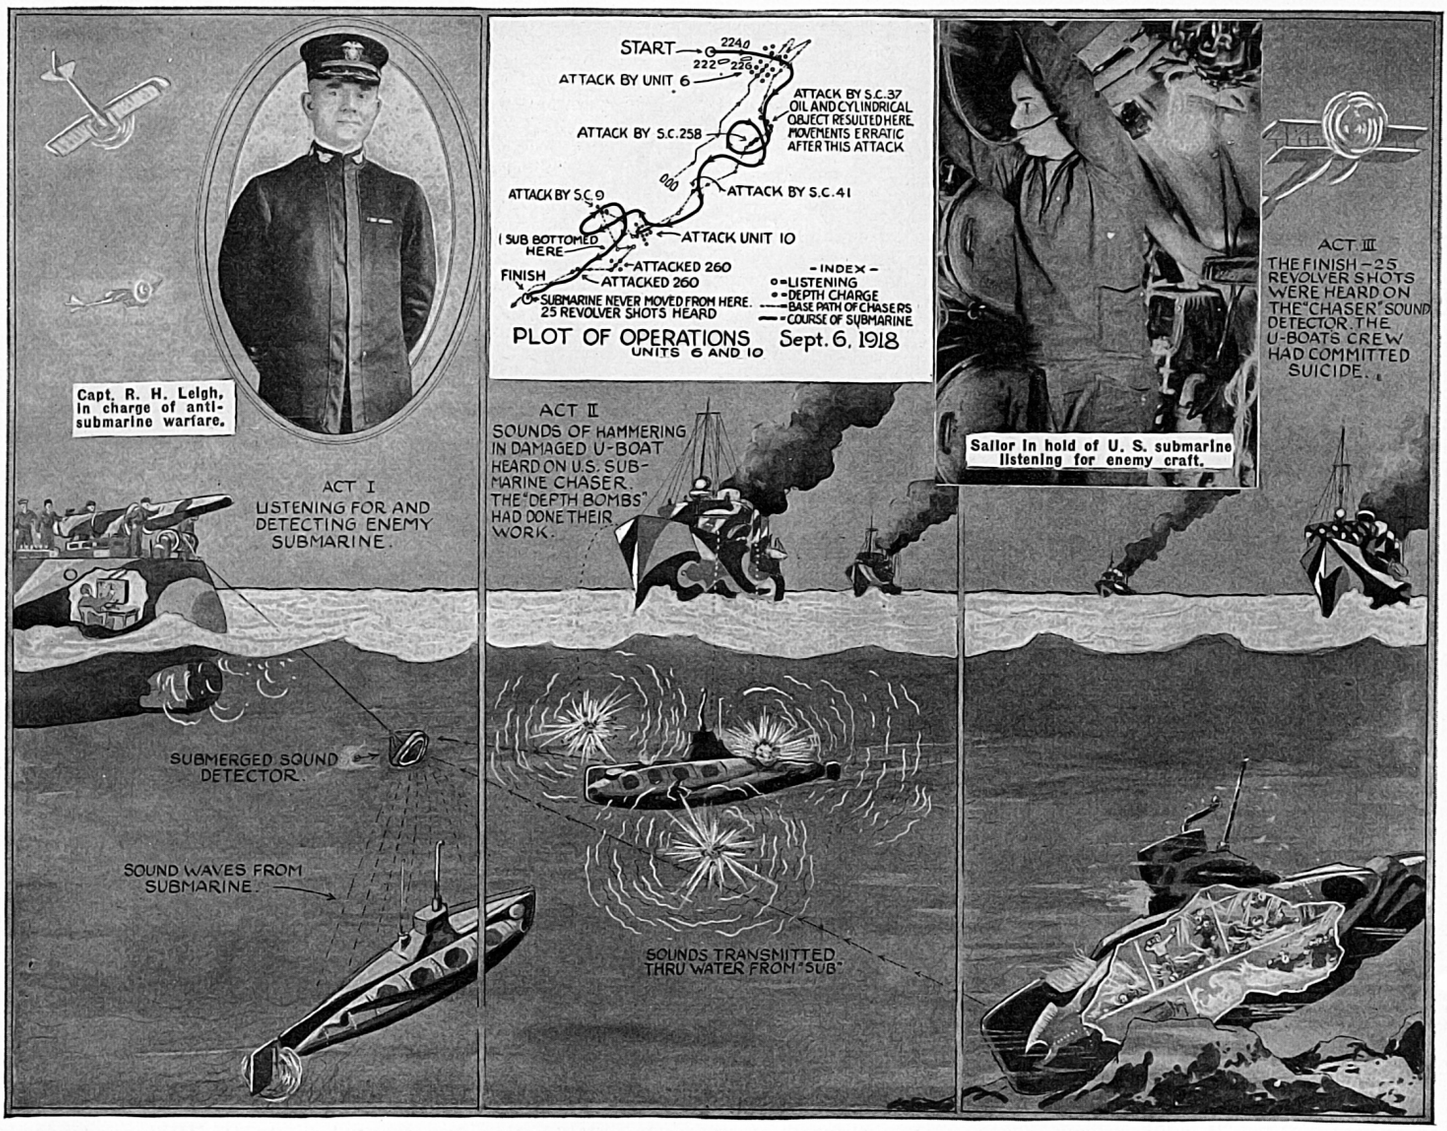

Hunting the U-boats by "Sound" Proved a Successful and Profitable Allied Naval Game—So Successful in Fact That, Had the War Lasted Another Year, the U-boats Would have Been Driven Completely from the Seas.

Hunting Submarines by Sound

By BREWSTER S. BEACH

How Yankee Scientists Beat the German U-Boats

THE United States Navy Department, after nearly two years of the closest censorship, has just given approval to the publication of certain data relating to the development in the United States during the war of submarine detecting devices, which were used to signal advantage by this country and the Allies in prosecuting and bringing to a successful conclusion the campaign against the German U-boat.

The apparatus may be termed the composite work of the General Electric Company, Submarine Signal Company, Western Electric Company, the National Research Council, assisted and advised by many eminent scientists, engineers and research specialists—chief among whom were Drs. W. R. Whitney, Irving Langmuir and W. D. Coolidge, Prof. R. A. Millikan, Prof. Max Mason, and others.

Realizing that the prompt solution of the submarine problem was the key to a successful termination of hostilities, Secretary Daniels, immediately upon America's entrance into the conflict, appointed a special board to devise ways and means to overcome it.

At the suggestion of Dr. Whitney, director of General Electric Company's research laboratories, a group of scientists was formed at Nahant, Mass., under Dr. Irving Langmuir, where the results of extensive research activity were put to practical tests under actual conditions as nearly as possible approaching those in European waters.

Another group under Prof. Millikan, head of the Physics Department of the University of Chicago, was organized at New London, Conn., where the work of both bodies was later co-ordinated.

Out of the efforts of these two groups and the work carried on in Schenectady assisted by Allied commissions of scientific men, there grew the American Submarine Detector—a development of the old principles of sound wave transmission in water in an altogether new and startling manner, and just how efficient this "detector" proved we shall see later.

The apparatus finally perfected and put to immediate use, was first designed to hang overhead from naval craft amidship below the water line and it depended for its direction-getting qualities on the peculiar and heretofore little understood faculty

THIS article describes the effort made by American scientists, under the stress of tremendous urgency, to invent and perfect an instrument to successfully locate submarines while in a submerged condition, at a time when every instant of delay meant further loss to shipping, and the fate of the Allied cause practically depended on the immediate defeat of German U-boat warfare. The Submarine Detector, as eventually evolved by them, utilizes old principles in a new and startling way. It is based on the theory of sound-wave transmission thru the water and depends for its direction-getting qualities on the peculiar and heretofore little understood faculty of the human ear to detect the direction of sound by the shifting of that sound from one ear to the other.

of the human ear to detect the direction of sound by the shifting of that sound from one ear to the other.*

Early Experiments

Every possible application to which electricity had been put was studied with painstaking care by experts during the development of the "Submarine Detector," and many experiments were carried on at New London and at Nahant with pliotrons, with amplifiers, with the Fessenden oscillator, which had been developed by the Submarine Signal Company, and with other similar instruments, before the proper combination of the principles of electricity and acoustics produced the final and successful device subsequently used.

Specialists in physics and acoustics from the great technical schools, such as Columbia University and Harvard, from the Research Laboratory of the G. E. Co. and the W. E. Co., and in fact from all over the United States, played a prominent part in the work done, particularly by the New London Group, altho unfortunately the armistice was signed before the latest devices developed here could be put into extensive use on the other side of the water.

Owing to the interference of sounds made by the listening ship's own motors, it was found more practical to stop the engines when about to take observations and this added greatly to the effective range of the instrument.

To overcome this obstacle, another device was developed *which could be trailed off the stern a hundred or so feet away* where the engine noises of the ship were out of range and the sound was then brought into the operator in the ship's hold.

A third adaptation of the listening principle was an instrument which protruded thru the hull and was a stationary part of the vessel's equipment. A somewhat circular device was constructed for use on submarines, but all of them were used to advantage.

While demonstrating the device to the British Admiralty, our American engineers were asked to study the question of fitting submarine detection units to airplanes, balloons and dirigibles.

After some experimentation, followed by more practical tests and conferences with the Lancashire Group of scientists at Harwich, apparatus was developed which met these needs and many *aircraft* were equipt with sound detectors *which rendered it possible for them to follow the course of the enemy submarine after they had seen her submerge, a valuable faculty which such craft did not possess until the introduction of the American detector.*

Allies Adopt Yankee Invention

However, when the devices had proved themselves eminently satisfactory after exhaustive experimentation here, the Navy Department organized a special Service Party under Capt. R. H. Leigh of the Bureau of Steam Engineering to demonstrate the detectors to the British Admiralty. Shortly after the arrival of this party abroad, the American submarine detectors were universally adopted by all the Allied navies.

It was found to be much superior in many ways to any of previous development, and came to be considered one of the most effective offensive weapons ever used against the submarine.

To sum up the results achieved by these American listening devices it is only necessary to recount a few pertinent points to illustrate the device's practicability.

In spite of it all, initial experiments proved slow of entirely satisfactory developments until the fall of 1917, when it was decided to go out to sea off Cape Cod for more thorogoing tests.

The sea was clear of craft as far as the eye could see—yet the operator with his ear to the detector distinctly heard a vessel approaching—nearer—nearer—nearer. The captain from the bridge eagerly scanned the horizon with the ship's glasses—nothing in sight.

"Send a man aloft with powerful glasses," he commanded. "The detector has picked up a craft 3 points on our starboard bow."

The sailor returned. "Nothing in sight, sir."

"I'll go aloft myself. That boat sounds as if it were very near. Why, we can hear her engine as clearly as if she were alongside."

Puzzled, the captain returned from the masthead after a disappointing vision of a calm and perfectly clear sea.

"How's she coming?" shouted the first lieutenant down the hatchway.

"Heading straight for us, sir. Sound getting louder every minute."

There was nothing to do but wait.

The captain pulled out his watch and sat down. Fifteen minutes—half an hour—an hour—ticked on!

(*Continued on page* 167)

* Another very interesting point is that when mounting microphones on each side of a vessel, the *loudness* of the incoming sound is equal in both telephone receivers, *i. e.*, if a submarine is on the starboard side of the ship, it will be heard just as loud from the port side. But, the difference can be readily detected and very accurately too, by the *phase difference* as heard in the 'phones. In other words, the sound will be heard a fraction of a second earlier in one ear than in the other. Small as this difference is, even a green operator will detect it at once.

—*Excerpt from Mr. H. Gernsback's editorial in the October, 1917 issue of this journal.*

That One-Man Submersible

IN the March issue of this journal there appeared an illustrated article describing a newly invented, one-man submersible boat, intended for purposes of life saving, locating floating mines and other purposes. At the time the article was prepared, the Editors only had the inventor's patent to guide them in its preparation, and the illustration was prepared by one of the staff artists. But behold! This strange animal of the deep really lives, as the accompanying photographs of the actual working device prove. The inventor of the one-man submersible is W. R. Barringer, of Denver, Col., which is a long way from the sea, and it puzzled the Editors how a rank land-lubber such as the inventor appeared to be, could have the heart to work out a complete submarine or anything akin to that device. But now the secret is out, for it appears that the inventor, who was formerly in the United States Army, had gained considerable experience while in foreign lands, and he evolved the principles underlying his submersible boat while observing the methods of pearl and sponge divers in the far-distant Sulu Archipelago.

The makers of the Barringer one-man submersible, claim, among other things, that, due to its peculiar construction, no pressure is required to offset the tremendous external pressure of the water, even when submerged to such depths as 350 feet, for which this submersible is practicable. It is interesting in this connection to mention that the maximum depth reached by U. S. Naval divers in especially constructed diving suits and bells, is less than 300 feet. Moreover, in the ordinary diving suit the tremendous internal pressure of 130 pounds per square inch is necessary to remain at a 350-foot depth for any length of time. This new submersible diving outfit requires but the normal pressure of 15 pounds per square inch, regardless of depth attained. The inventor also claims that no strain is occasioned on the operator, even after a long period under water. The operator rests on a heavy air cushion and suffers no ill effects while below the water's surface. Further, the ascent and descent of the boat need not be done gradually, as in the case of the ordinary diving suit or bell, in order to accustom the body to the changing water pressure. On the contrary, so he claims, ascent may be made rapidly, and the operator's time is, therefore not wasted in slow sinking or rising.

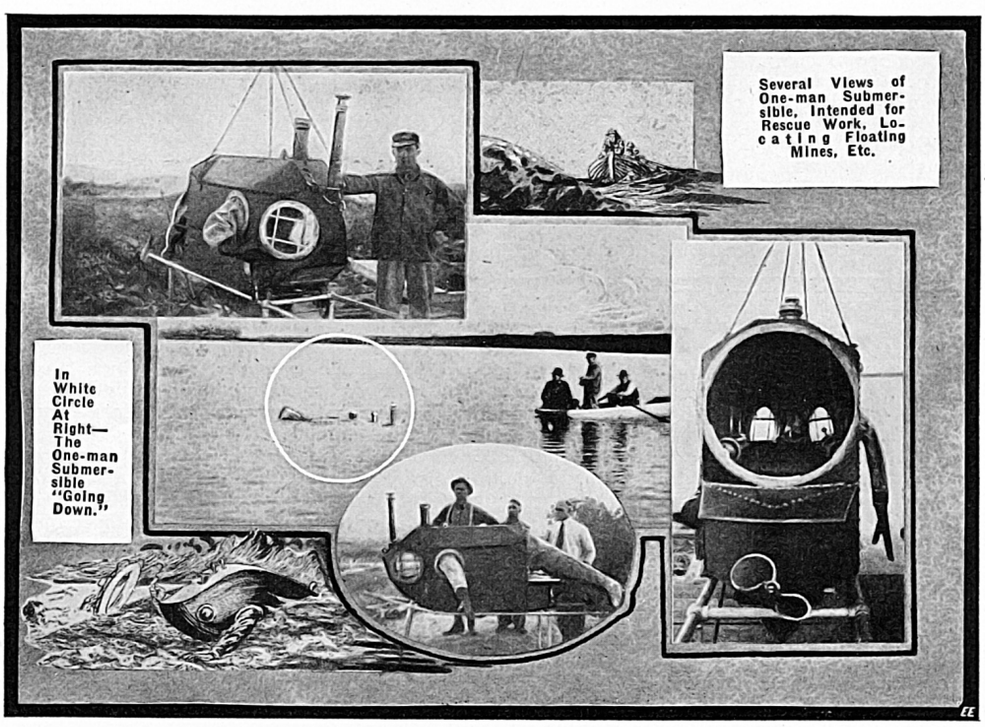

As pointed out in the previous article, there are many interesting electrical features incorporated in this device, including electrical propelling and steering means, an electric searchlight and many other novel devices.

My Inventions

By Nikola Tesla

V. The Magnifying Transmitter

AS I review the events of my past life I realize how subtle are the influences that shape our destinies. An incident of my youth may serve to illustrate. One winter's day I managed to climb a steep mountain, in company with other boys. The snow was quite deep and a warm southerly wind made it just suitable for our purpose. We amused ourselves by throwing balls which would roll down a certain distance, gathering more or less snow, and we tried to outdo one another in this exciting sport. Suddenly a ball was seen to go beyond the limit, swelling to enormous proportions until it became as big as a house and plunged thundering into the valley below with a force that made the ground tremble. I looked on spellbound, incapable of understanding what had happened. For weeks afterward the picture of the avalanche was before my eyes and I wondered how anything so small could grow to such an immense size. Ever since that time the magnification of feeble actions fascinated me, and when, years later, I took up the experimental study of mechanical and electrical resonance, I was keenly interested from the very start. Possibly, had it not been for that early powerful impression, I might not have followed up the little spark I obtained with my coil and never developed my best invention, the true history of which I will tell here for the first time.

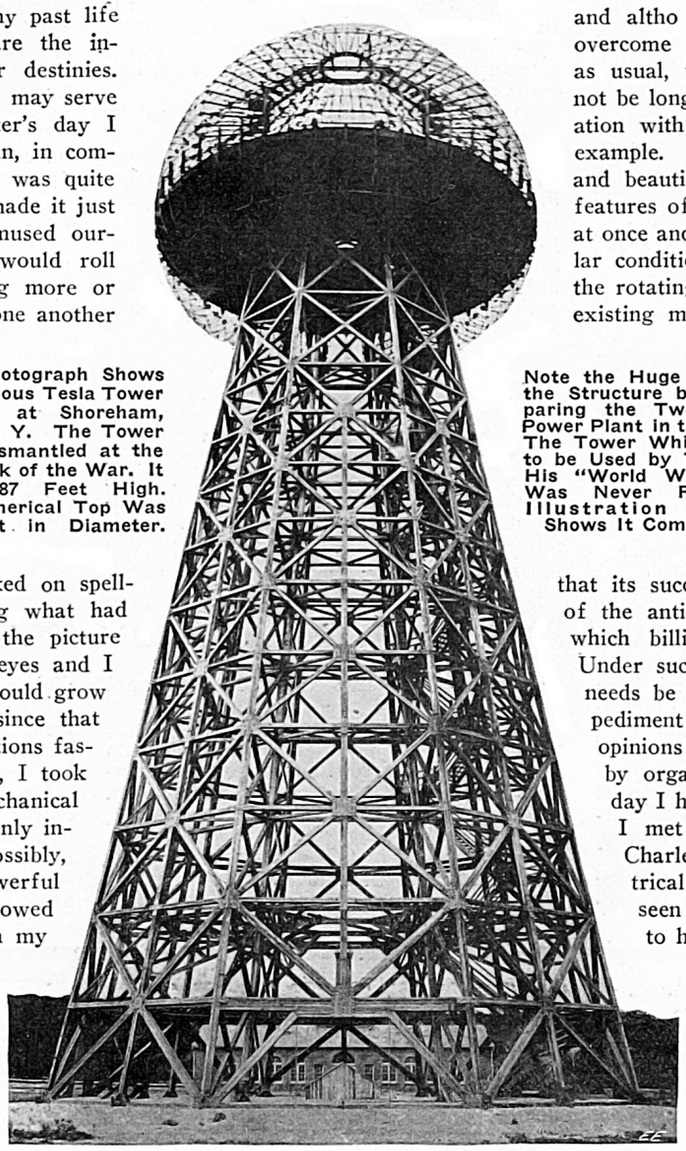

This Photograph Shows the Famous Tesla Tower Erected at Shoreham, L. I., N. Y. The Tower Was Dismantled at the Outbreak of the War. It Was 187 Feet High. The Spherical Top Was 68 Feet in Diameter.

Note the Huge Size of the Structure by Comparing the Two-story Power Plant in the Rear. The Tower Which Was to be Used by Tesla in His "World Wireless," Was Never Finished. Illustration Opposite Shows It Completed.

Scrapping the World's Engines.

"Lionhunters" have often asked me which of my discoveries I prize most. This depends on the point of view. Not a few technical men, very able in their special departments, but dominated by a pedantic spirit and nearsighted, have asserted that excepting the induction motor I have given to the world little of practical use. This is a grievous mistake. A new idea must not be judged by its immediate results. My alternating system of power transmission came at a psychological moment, as a long-sought answer to pressing industrial questions, and altho considerable resistance had to be overcome and opposing interests reconciled, as usual, the commercial introduction could not be long delayed. Now, compare this situation with that confronting my turbine, for example. One should think that so simple and beautiful an invention, possessing many features of an ideal motor, should be adopted at once and, undoubtedly, it would under similar conditions. But the prospective effect of the rotating field was not to render worthless existing machinery; on the contrary, it was to give it additional value. The system lent itself to new enterprise as well as to improvement of the old. My turbine is an advance of a character entirely different. It is a radical departure in the sense that its success would mean the abandonment of the antiquated types of prime movers on which billions of dollars have been spent. Under such circumstances the progress must needs be slow and perhaps the greatest impediment is encountered in the prejudicial opinions created in the minds of experts by organized opposition. Only the other day I had a disheartening experience when I met my friend and former assistant, Charles F. Scott, now professor of Electrical Engineering at Yale. I had not seen him for a long time and was glad to have an opportunity for a little chat at my office. Our conversation naturally enough drifted on my turbine and I became heated to a high degree. "Scott," I exclaimed, carried away by the vision of a glorious future, "my turbine will scrap all the heat-engines in the world." Scott stroked his chin and looked away thoughtfully, as though making a mental calculation. "That will make quite a pile of scrap," he said, and left without another word!

IMAGINE a man a century ago, bold enough to design and actually build a huge tower with which to transmit the human voice, music, pictures, press news and even power, thru the earth to any distance whatever without wires! He probably would have been hung or burnt at the stake. So when Tesla built his famous tower on Long Island he was a hundred years ahead of his time. And foolish ridicule by our latter day arm-chair "savants," does not in the least mar Tesla's greatness.

The titanic brain of Tesla has hardly produced a more amazing wonder than this "magnifying transmitter." Contrary to popular belief his tower was not built to radiate Hertzian waves into the ether. Tesla's system sends out thousands of horsepower thru the earth—he has shown experimentally how power can be sent without wires over distances from a central point. Nor is there any mystery about it how he accomplishes the result. His historic U. S. patents and articles describe the method used. Tesla's Magnifying Transmitter is truly a modern lamp of Aladdin.

EDITOR.

"Aladdin's Lamp".

These and other inventions of mine, however, were nothing more than steps forward in certain directions. In evolving them I simply followed the inborn instinct to improve the present devices without

(*Continued on page* 148)

Copyright, 1919, by E. P. Co. All rights reserved

Mr. Tesla's articles started in our February issue

Copyright, 1919, by E. P. Co.

THIS PHOTOGRAPH OF A MODEL SHOWS HOW THE TESLA TOWER BUILT ON LONG ISLAND, EIGHTEEN YEARS AGO, WOULD HAVE LOOKED COMPLETED. FROM ITS APPEARANCE NOBODY WOULD INFER THAT IT WAS TO BE USED FOR THE GREAT PURPOSES WHICH ARE SET FORTH IN HIS ACCOMPANYING ARTICLE.

Filming "Talking" Movies in Glass Houses

By H. WINFIELD SECOR

YOU probably remember the old adage about "people who live in glass houses, should"—etc.—but the latest is the filming of talking motion pictures in all-glass houses or studios, and the process has been invented by one —David O. Royster of St. Louis, Mo., the "show-me" state. Mr. Royster's scheme covers an improved method and apparatus for synchronously making motion pictures and sound records.

As the inventor points out, it has heretofore been very difficult, if not indeed impossible, to make talking motion pictures which would bear a perfect synchronous relation to each other when reproduced, for the reason that the camera used in taking the motion pictures must necessarily be located a certain distance away from the object to be photographed, and being that the sound recording device is located adjacent to the camera in order to operate in synchronism with it, the distance between the receiver on the sound recording apparatus, and the actors being photographed, is such that the sound waves in traveling from the object to the recorder, do not reach the latter for an appreciable length of time. As a result the recorded sounds are not exactly synchronous with the pictures, when these sounds and pictures are later reproduced in the theater projector. And besides, with such an arrangement the sound waves are insufficient in volume to make a clear and strong record on the disc or cylinder of the talking machine.

Mr. Royster, in his scheme, provides a transparent *glass studio stage,* or *all-glass house,* if the scene requires it, which is occupied by the objects to be photographed. Thus motion pictures can be made by natural light; means are also provided for concentrating the sounds produced by the speakers, which sounds are telephonically transmitted to the sound recording device, such as a phonograph, located adjacent to and operated synchronously with the motion picture camera.

As is the practise in all of the larger studios, the camera and other appurtenances, such as the sound recording phonograph, etc., are mounted on a wheeled truck, which may be moved along a track, or set of tracks, so as to take either "close-ups" or normal focus pictures, as desired, also to make changes quickly. Some studios utilize a small electric car fitted with a motor and controller, so that the camera man or his assistant can readily move the camera toward or away from the stage, as the occasion may demand. You have probably seen at one time or another a motion picture where the objects came up rapidly toward you, until the actress' face, for instance, was as big as the entire screen. This effect is obtained very easily by moving the car toward the scene. Scenes or settings which fade away, causing the objects to become smaller, are taken in the reverse manner, i. e., by moving the camera away from the stage while the picture is being taken.

There is provided in the present scheme a powerful motor-driven electric blower under the studio floor, which projects a strong draft of air upward thru a series of gratings in the stage floor, and the powerful upward vertical movement of the air thru a series of openings in the glass roof carries the sounds of the voices upward, toward the microphones or sound detectors, which effect is intensified by an electric exhaust fan at the top of the glass-enclosed stage, as shown in the diagram and illustration herewith. The battery of microphones which pick up the sounds at the ceiling of the stage are connected up with a telephone line which leads to the electric recorder on the phonograph beside the "movie" camera, there being a rigid mechanical connection between the camera and the phonograph to ensure synchronism.

Owing to the peculiar and unusual lighting arrangements with this form of all-glass stage, the "setting" or other scenery is placed back of the stage, so as to allow the daylight to pass over it and thru the glass to illuminate the stage proper. Some props and furniture can of course be placed directly on the stage. It is understood that where the light is not sufficiently strong for the taking of motion pictures, the stage can be lighted artificially. The degree of sound transmitted by the microphones fitted over the stage may be modulated by means of adjustable valves placed in front of the microphone, and also by opening more or less of the by-pass valves in the glass inner ceiling, which permits some of the air-conducted sound waves to pass between the two ceilings and out thru the fan chamber.

The apparatus as here described is comparatively simple, can be easily operated, does not require artificial light, and motion pictures and sound records of absolute synchronism can be readily made at any distance from the object within the focal length of the camera, claims the inventor. All things considered, it would seem to presents a new and successful "Movie" idea.

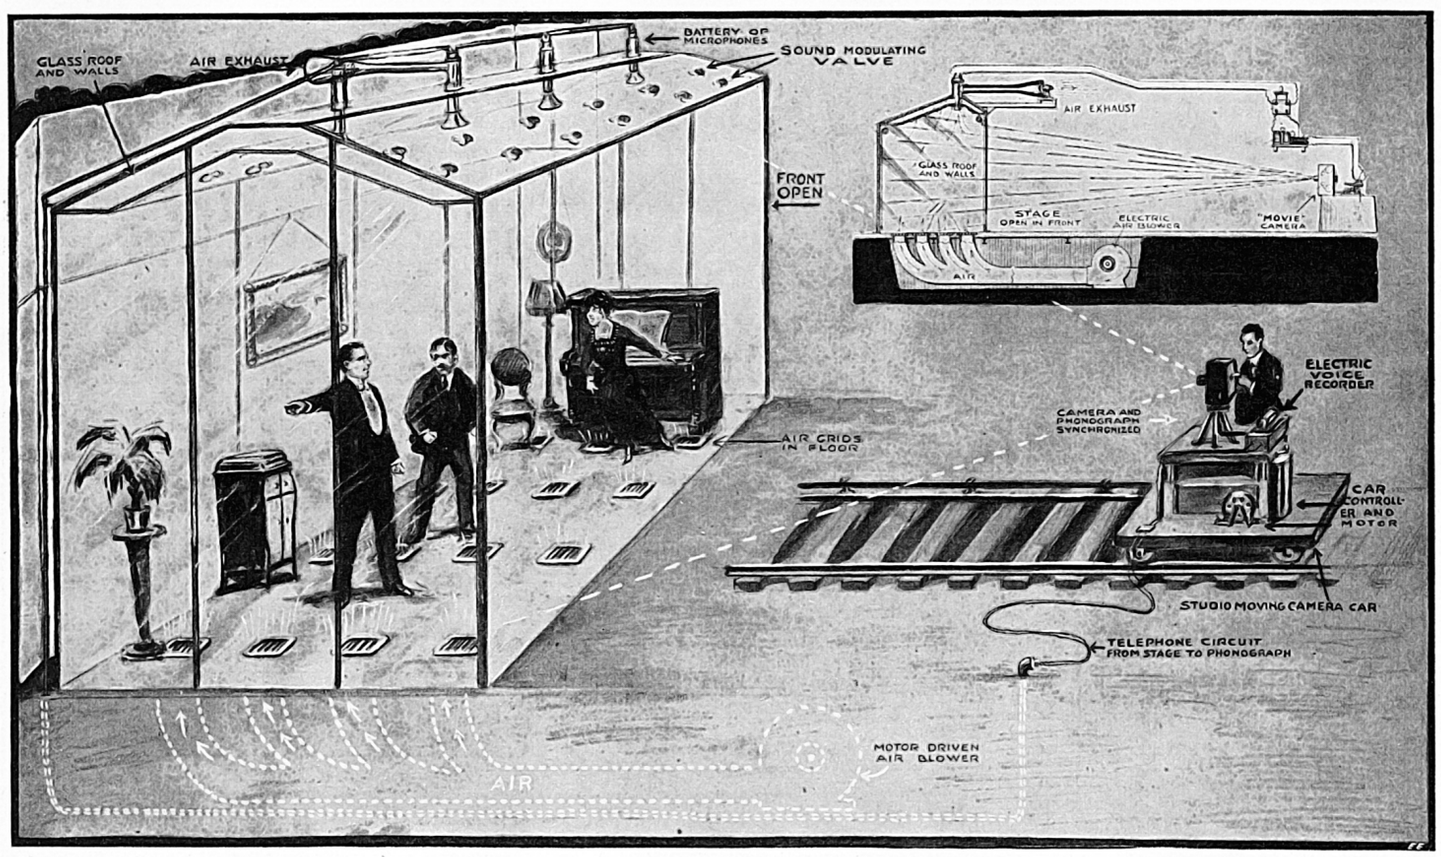

The Secret of Perfect "Talking Motion Pictures" Lies in the Proper Synchronism Between the "Pictures" and the "Voice," and Also in the Clarity and Even Tone of the Speech Reproduction. All Three of These Problems Have Been Solved by the Invention of the Glass Enclosed Stage Here Illustrated.

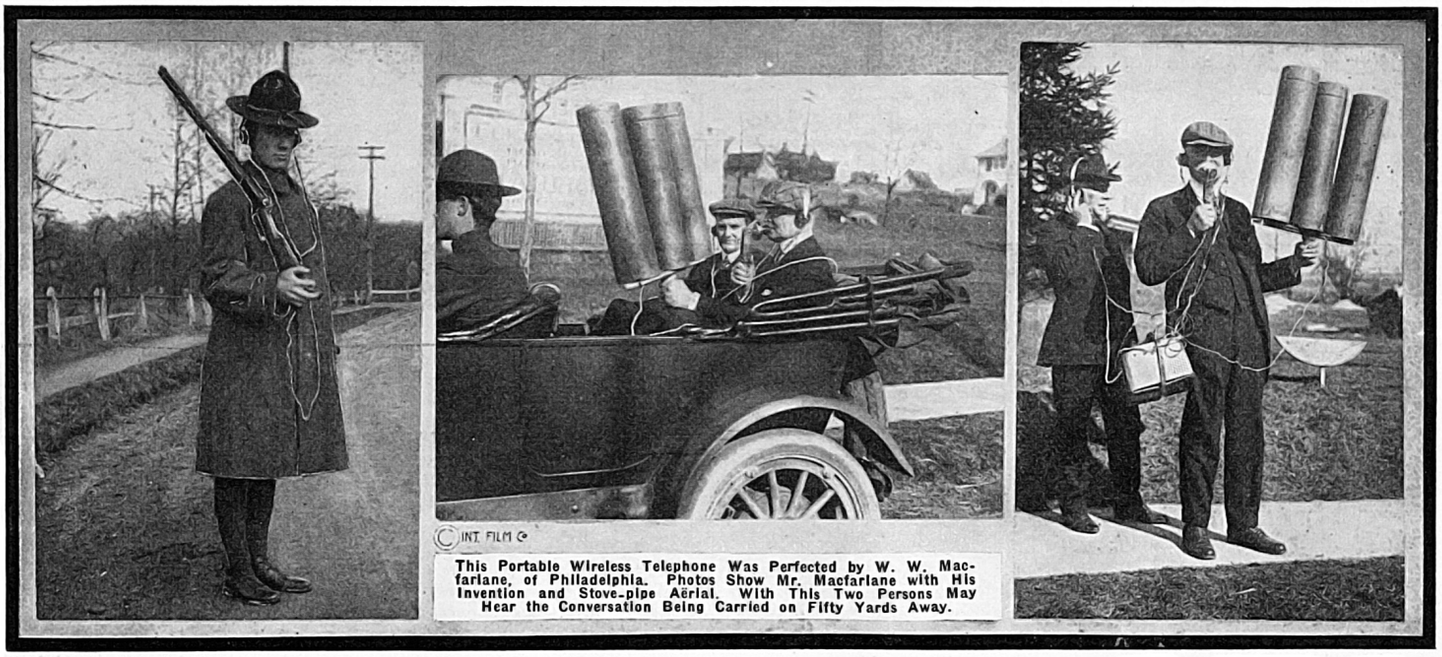

This Portable Wireless Telephone Was Perfected by W. W. Macfarlane, of Philadelphia. Photos Show Mr. Macfarlane with His Invention and Stove-pipe Aërial. With This Two Persons May Hear the Conversation Being Carried on Fifty Yards Away.

Photos by Int. Film Service

Call Up Wifey on the "Stove-Pipe" Radio

A MAN with a box slung over his shoulder and holding in one hand three pieces of stove pipe placed side by side on a board climbed into an automobile on East Country Road, Elkins Park, Pa.

As he settled in the machine he picked up a telephone transmitter, set on a short handle, and said:

"We are going to run down the road. Can you hear me?"

Other passengers in the automobile, all wearing telephone receivers, heard a woman's voice answering: "Yes, perfectly. Where are you?"

By this time the machine was several hundred yards down the road and the voice in the garage was distinctly heard.

This was one of the incidents in the first demonstration of the portable wireless telephone outfit invented by W. W. Macfarlane, of Philadelphia.

Mrs. Macfarlane, sitting in the garage back of the Macfarlane home, was talking thru the wireless telephone to her husband, seated comfortably in a moving automobile 500 yards away.

The occupants of the car were a chauffeur, a reporter and a photographer. All wore the telephone receivers and could hear everything Mrs. Macfarlane was saying. The chauffeur had no other apparatus than the receiver with the usual telephone cord attached by a metal clip to his steering wheel.

Lying beside Mr. Macfarlane was the foot-square box, the only "secret" in the whole demonstration. What is in the box is the inventor's mystery. This box weighs about twelve pounds. The other machinery used consisted only of the usual telephone transmitter and receivers and the three pieces of stovepipe standing erect on a plain piece of board. This forms the *aërial* of the apparatus.

Before starting on the automobile demonstration of his wireless telephone Mr. Macfarlane stood in the garage and directed the movements of a soldier in a field more than 200 yards away from him. This soldier assistant had a pair of telephone receivers over his head, connected by a wire with two metal clasps to his rifle (see photo herewith). He marched and halted and about-faced and left shouldered arms out there in the field the instant Mr. Macfarlane gave the order thru his little hand wireless 'phone in the garage.

The "July" Number of the Electrical Experimenter

"Hello Europe"—via Radio. Complete story of How Secretary of the Navy Daniels talked via the New Brunswick Radio Station to President Wilson in France, by Charles M. Ripley.

"My Inventions"—Part VI—by Dr. Nikola Tesla, himself. Besides a big feature surprise article by the world's master inventor.

Interesting Facts About the Electron—How big are atoms and electrons? by L. R. Jewett.

Faradic Currents and How to Apply Them. Including rheumatism, nervous complaints, and other ailments. Treatment with apparatus described in the present issue.

A Rattling Good Electric Story—"How 'Don' flashed the 'S.O.S.' ", by Mabel M. Davis.

New Electric Detector Net for Submarines.

Loop Aerials—Description of Actual Results obtained over 200 mile distances, by Prof. Lloyd M. Knoll.

Tree Wireless—How living trees receive radio messages across the ocean. The wonderful work of General George O. Squier, Chief Signal Officer, U. S. Army.

Storage Battery Testing—Practical Technique in simple language, by Harold R. Adams, storage battery engineer.

Audions operated on Alternating Current—Both Filament and Plate Circuits. Every radio man will want to read this authentic article, by Elliott A. White, formerly Instructor in Radio, Air Service School, Carnegie Institute of Technology.

Mr. Macfarlane said he would make no fanciful predictions as to what his simple, portable wireless telephone might do.

"There are all kinds of possibilities in it," he continued. "If this could have been ready for use in the war, think of the value it would have had. A whole regiment equipt with the telephone receivers, with only their rifles as aërials, could advance a mile and each would be instantly in touch with the commanding officer. No runners would be needed. There could be no such thing as a 'lost battalion.'

"No high power is necessary to operate this wireless. I am using one-tenth of an ampere in this experiment here and the results you see are so good that the voice carries as well as on the usual wire telephone. The telephone system uses about one-fourth of an ampere.

"I am working on a new theory in electricity, and in wireless. I think the accepted principle of the waves is only part of the story. There is something else. It is that something else that I am utilizing. There is no supplementary current in this system as in the usual wireless operation. There is no static and no interruption."

An umbrella, Mr. Macfarlane explains, will serve as well as a rifle for an aërial. "A plain citizen carrying a small handbag containing the compact wireless outfit and with his umbrella held aloft can walk along the street talking with friend wife at the house at the other end of the city," he said.

"How costly would this outfit be?" he was asked.

"Nothing new is used," he explained. "All the apparatus fits in with existing devices. Everything needed for the outfit could be bought for probably $15."

"My apparatus here is rather crude and not all the quality of current is obtained that I can get," he continued. "But it is no wild dream to say that a man riding on a train to New York can telephone his wife about bringing a friend home for dinner by using this device. It will be perfected thus far before very long. This apparatus here needs improvement, but it demonstrates the practicability of the thing. Even now I can connect up the end of the wireless in the house with the existing telephone system and thus can talk from my automobile with any person in the city."

Tin-Can Models—A New Art

By GEORGE HOLMES

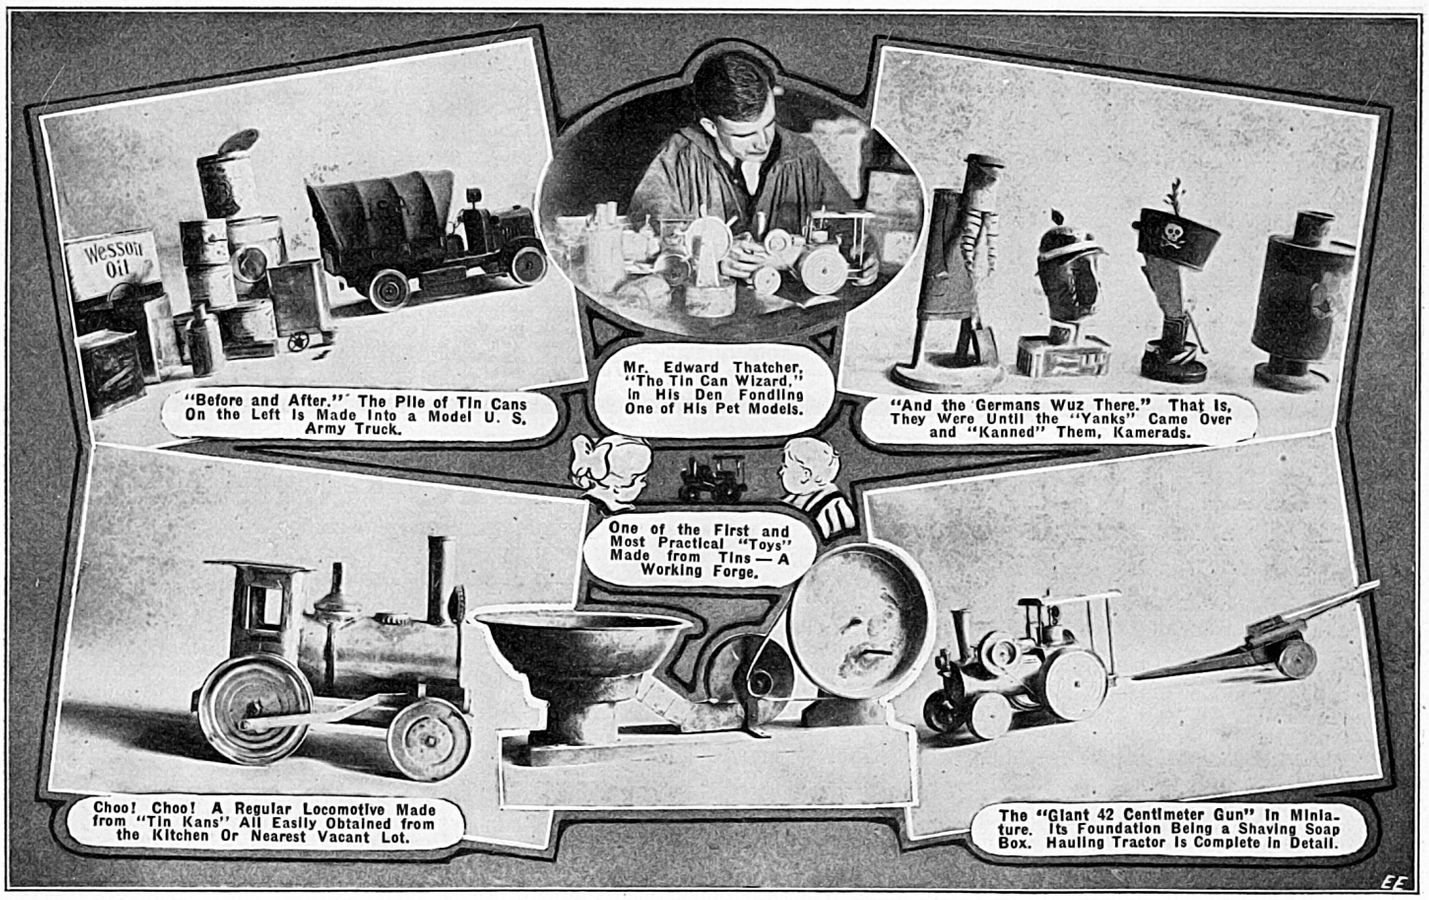

IMAGINE if you can on one side a scene, wildly confusing, resembling a rubbish heap of every conceivable sort of tin-can, from the tomato to dainty tin-boxes which once upon a time held My-Lady's peach and cream complexion.

Picture, on the other hand, a scene with beautiful, splendid and practical toys, such as money could not buy, all evolved from these same tin-cans and boxes, with a little touch of imagination, inventiveness and mechanical knack, plus a pair of pliers, a soldering iron and the transformation is complete.

The originator and "wizard" of the tin-can toys is Mr. Edward Thatcher, of Teachers' College, Columbia University. It was he who hit upon the novel plan of utilizing waste tin-cans and from them making amusing, decorative and instructive playthings. He gave an inkling of this new art to his classes at Columbia and the students took it up with such zeal that these models were eligible for the recently successful public exhibition at the Art Alliance Galleries.

As his bit in the war, Mr. Thatcher was successful in having this artcraft introduced in the hospitals both here and abroad; and so helped the wounded soldiers to find a remunerative and amusing pastime which greatly aided in keeping their minds off their troubles. Even such men as were suffering from shell shock took to the tin-can toys; it would seem at first impression that they could not stand the noise of the hammering on the cans, but the reverse proved the rule. In cases where they would jump if a match box were dropt, they seemed not in the least inconvenienced by the sound of the constant tinkering of the tin-can artists and would work all day in the "toy-shops."

The possibilities of this new artcraft are practically unlimited. Where heretofore the wounded have occupied their time in the making of these toy models, the art is spreading the country o'er and will be one of the subjects taught in many schools. Some of the models here shown have been duplicated by ten-year-old boys at the Edgewater Manual Training School.

Most interesting of all is the composite view showing a toy *Army Truck*—"before and after." All the various forms of cans necessary to construct this truck are shown on the left, while on the right may be seen the completed model. The body of the truck was made from the side of a "Wesson" oil can, the wheels were made from evaporated milk cans, the seat from a cocoa box and the hood and radiator from an olive oil can. The indentations for the radiator, to resemble the cooling tubes, were faithfully reproduced by punching many hundreds of holes so as to give it that "corrugated" appearance; I think that would be the proper word, still not envying the long and tedious task it must have been to put all those holes into (or should we say "out of") existence. The radiator cap came from the top of a tooth paste tube and the side lamps and tail-light from screw caps of various olive oil cans.

Drifting back to our war atmosphere we have the steam tractor pulling a "Giant" gun. The tractor was brought to life from these various items: The fire-box and platform from a much abused sardine box, the boiler from another olive oil can, the steam whistle from the top of a "Lyons Tooth Powder" can, wheels from evaporated milk cans and the roof from the side of a square tin. The dummy driving wheels are made from the top covers of "Crisco" cans, soldered together so as to make a sort of pulley face for the driving cord. The long-range gun was built from a shaving-stick box, with the evaporated milk cans again doing duty as wheels.

These model toys are not self-propelling but could easily be made so. It would seem that Mr. Thatcher was born to the model business. He has constructed many real "live" models that work by themselves, notable amongst these being a large-size model of one of the Pacific Coast "mallet type" locomotives, that runs under its own power. The author also had the pleasure of seeing a model "tractor," built along the lines of the one constructed from tin-cans, only this one was made of brass and ran under its own steam.

Mr. Thatcher has found it advisable to write a book on this interesting subject which undoubtedly will find a great demand when it comes off the press. And so we see this new "rage" equally successful with the younger classes as well as at the Teachers' College at Columbia, where, among society folks, they call it "occupational therapy."

(*The Editor will be pleased to receive good photos of tin-can models of electrical things. To mention a few that our readers can readily construct: Telephone, electric generator, electric locomotive, radio sets, airships, etc.*—EDITOR.)

Making a Practical Electrician

THE world has never before witnest the vast opportunities that at the present moment lie before the people of the United States. Europe, with its shell torn territories and completely exhausted stocks of raw and finished materials, turns to the one country in the whole world fitted to rehabilitate its wastes and reconstruct its shattered industries.

America has a gigantic task before it—not only to feed practically the whole world, but to rebuild a great portion of it. The real business men, the men of creative genius and untiring skill, realize the enormity of the job they must undertake. They know that if the U. S. meets the test, a period of wonderful prosperity is open at its door. The one problem that confronts the business executive to-day is that of labor—*skilled* labor. Can we turn out enough trained men to meet the tremendous demand?

In no other field is the need of thoroly trained men more apparent than in the electrical world. On every side comes the cry for the trained electrician, the man of action, with vim and vigor and the "knowledge of how to do things." Daily we read of the marvelous accomplishments of the wonder of the age—ELECTRICITY. This power in the business life of to-day will play a leading rôle in the world's reconstruction. The United States is rapidly developing its own natural resources and enlarging its field of endeavor—to say nothing of the vast power houses, the new electrified railroads, and the thousands of other electrical needs of Europe. It is to the young man of to-day who is now considering what vocation to take up and who will be the worker of to-morrow, that we look with expectant eyes.

Dr. Charles P. Steinmetz, Chief Consulting Engineer of the General Electric Company, has said that, "The world needs men who know something of electricity, of the operations and control of electrical power. It needs men more every year, its very existence depends on the electrician."

In the greatest city of the United States, in its very heart is located a school, whose aims and purposes are to teach men, both young and old and from every walk of life, the How and Why of electricity by the greatest teacher known—that of getting knowledge by actual experience.

A trained man is the finished product, one who understands the problems coupled with a broad experience in electrical engineering.

Theory is a necessity, but this busy world of ours wants more than theorists. He who is able to supplement his theoretical knowledge with the proper proportion of practical, do-it-yourself-knowledge, is the man who will get most of the world's rewards.

The school which has thus revolutionized educational methods has struck the happy medium of combining enough theory with practical work to turn out first-class electricians in the shortest possible time.

(*Continued on page* 153)

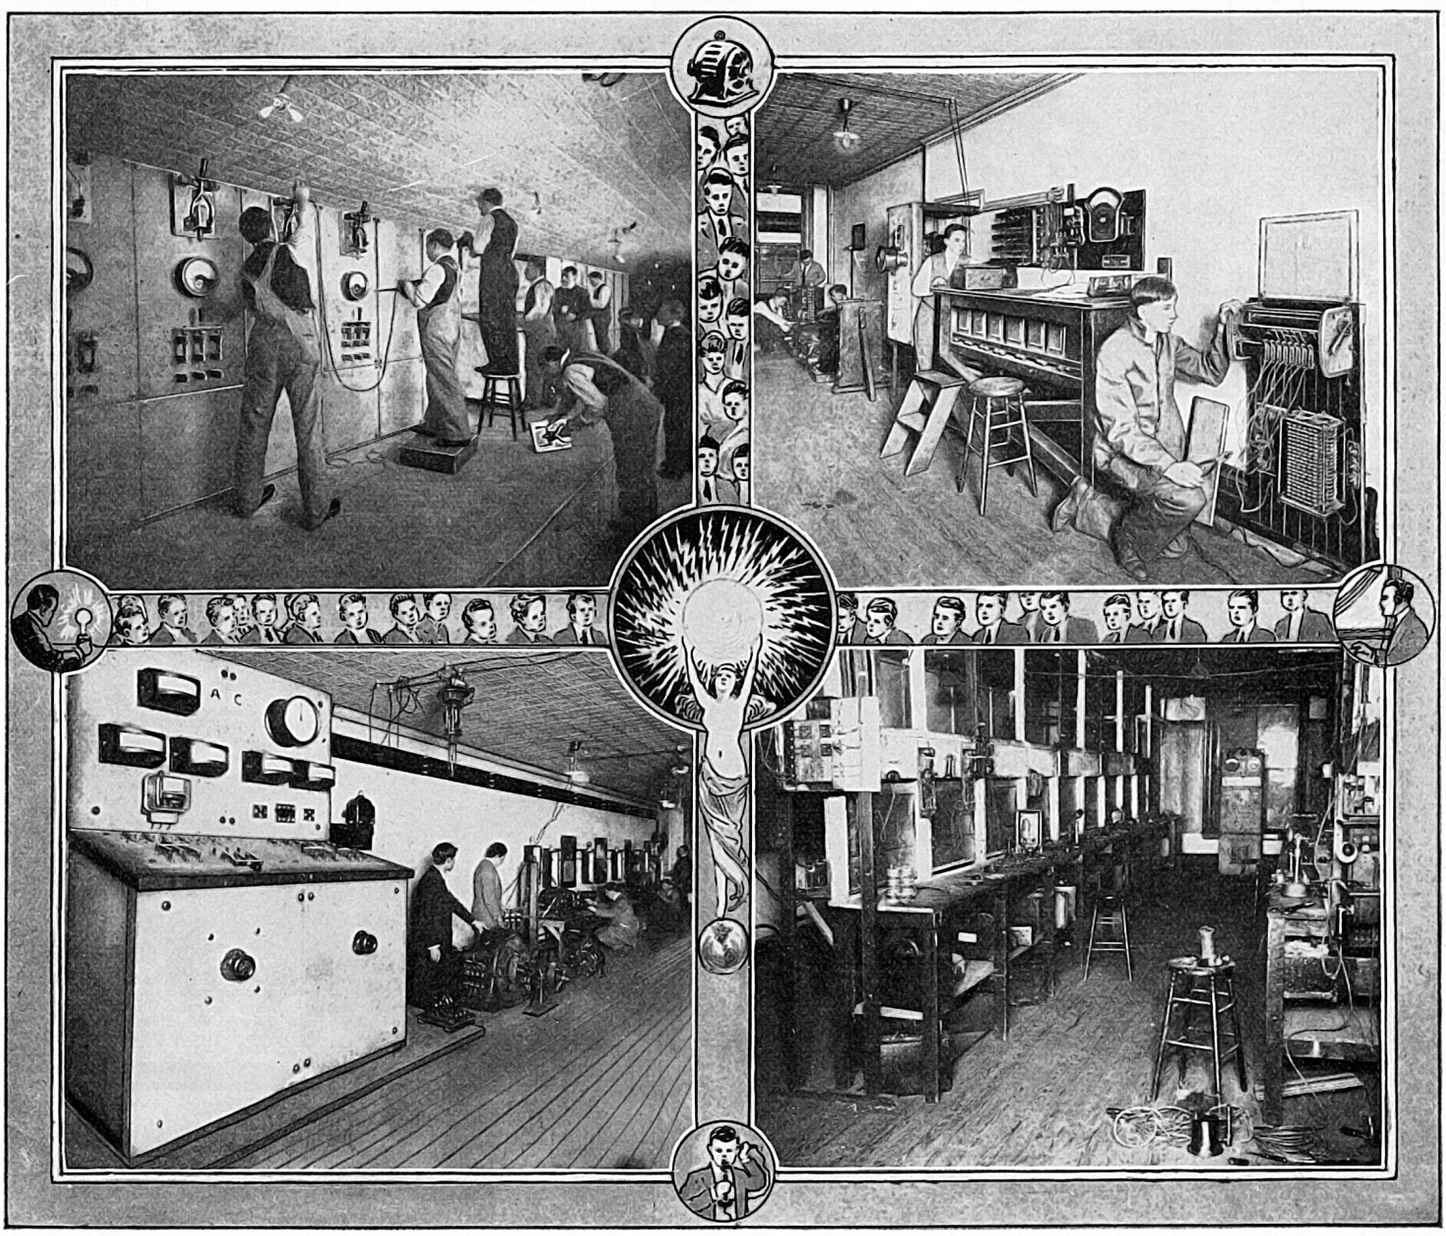

In the Top Left Photo We See the Prospective Electrician Learning the Art of Switchboard Construction. He Takes Apart, Puts Together and Connects These Boards, by Bus-bars and Other Wiring Methods. In Our Lower Left View We See These Same Men Being Initiated Into the Mysteries of Generators, Motors and All Forms of A. C. and D. C. Machines. Top Right Shows Our Men Grasping the Details of Modern Electric Vehicles. The Men Assemble, Connect and Run Complete Systems and Also Take Care of the Storage Batteries. Lower Right Shows Where the Embryo Electrician Starts on His Upward Climb in the Mysterious Art of Electricity. Here He Learns How to Connect Batteries, Bells, Buzzers, Telegraph, Telephone and Fire Alarms as Well as Many Other Systems of Inter-communication.

Close-Ups of New Scientific Movies

By GEORGE VANDERBILT

THESE up-to-date crooks had the best of everything, including a regularly equipt radio set, but ere they could use it to decoy ships to disaster, big and powerful "Reggie" had the strangle hold on our pirate Wireless Operator. Tho there were no women present, curls were in vogue in the radio shack, as can be seen in the accompanying photograph, showing the artistic hook-up of the set.

Whatever else may have happened to him, he had brawn and muscle! That, and that alone, saved Reginald Jones in the new Fox Film, "Never Say Quit," when he ran afoul of a gang of crooks on board a ship in search of sunken treasures.

The "JINX" was his constant "pal." It started by his being born on a Friday, and the thirteenth to boot, and so together some one had made a big mistake. From the very first he was in trouble, his childhood was one nightmare. As he grew older it only made matters worse.

The Rôle of Electricity and Science in the Modern Photoplay

As the gay and dashing Lothario he goes to a ball, and gets into a scrap over a girl and has to exit via the house-tops to escape the "Bulls."

Good luck seems to beckon when a rich aunt dies and leaves him a fortune. But not for Reginald! He must come to her funeral in order to get the money, and the jinx sees to it that he never gets there. On his way he is robbed by pickpockets, his eyes are blackened, and he is bruised and walloped until he thinks his head is in his shoes. He misses his train after many harrowing adventures, and so the fortune goes to charity.

To replenish his empty wallet, Reginald sets out on a voyage after sunken treasure. Adventures befall him again, for the crew turns out to be a gang of crooks. They are bent on robbing a millionaire and his daughter, who are on board.

Reginald saves the millionaire and his daughter from the dire fate the crew has in store for them. He wins the girl's hand, heart and soul, and in matrimony he believes he has conquered the jinx at last. But a year later Reginald and his wife are blest with triplets, and Reggie, superstitious cuss, ventures to believe that the jinx has had something to do with that.

In our next movie we come upon a fair and real live "Radioette." The beautiful daughter of an over-indulgent and elderly millionaire. She is abducted by a band of crooks and taken to a desert island to await the payment of a fabulous ransom by her father—or on his failing to pay it, to forfeit her life. BUT—she knew "Wireless," or, as us "hams" now call it, "Radio," and thru this knowledge outwitted the desperadoes' well-laid plans, gaining a hubby thereby, as can be seen in Metro's latest photo-

(*Continued on page* 161)

The Well Muscled George Walsh In the Fox Film "Never Say Quit" Putting an End to the Bold Crook's Machinations. Note the Radio Outfit.

We Look Pretty May Allison Over, In Metro's "Island of Intrigue" at the "Wireless Piano". Added to That the Automatic Is Most Annoying to the Villain's Optic Nerve.

One of the "Wolves of Kultur" Rendered Senseless In Pathe's New Series. The Introduction of the Large Radio Direction Finder Is of Special Interest.

Another of the "Wolves of Kultur" Ready to Send Off the Death-Dealing Radio Torpedo and Slowly Counting the Seconds. He Is Perhaps Unaware That a Police Whistle Is "Passe" by Most Villains.

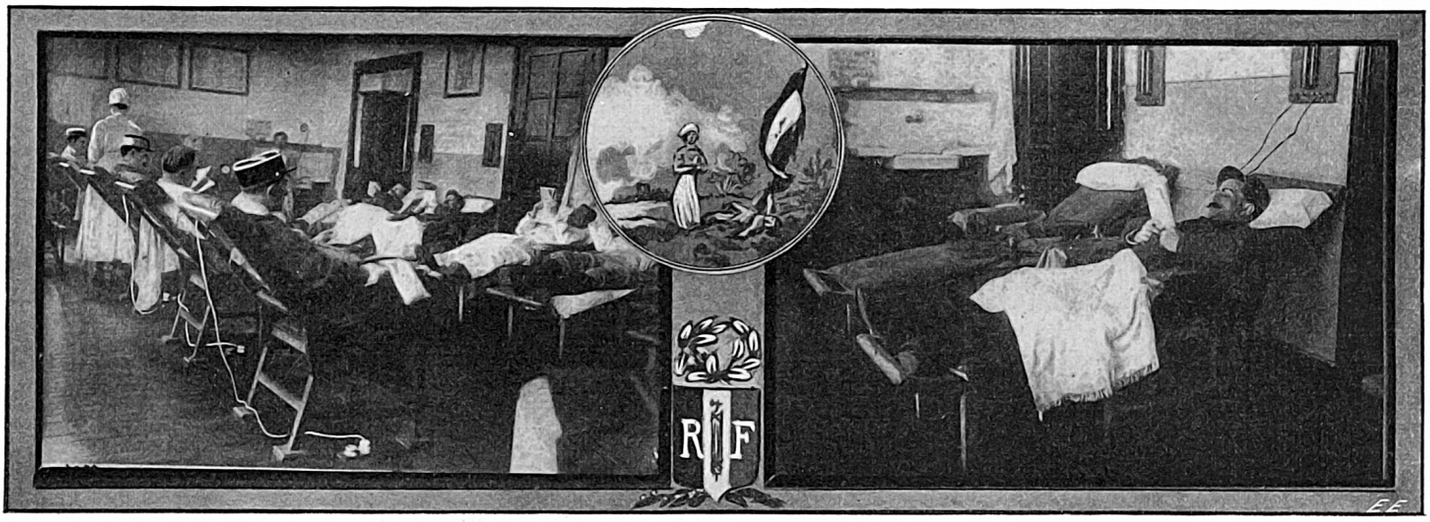

Electro-Therapeutic Ward at Bordeaux, France, Showing the Application of Intensified Rhythmic Faradization by Professor Bergonié. Altho Muscles Are Contracted Violently During This Faradization, the Patient Feels Hardly Anything.

A Wounded Soldier With a Fractured Leg Undergoing Intensified Faradization in Order to Reconstituate the Muscles of the Calf of His Leg. He Was Able to Walk Without a Cane Within Fifteen Days After the Treatment Started.

Paris Letter

By JACQUES BOYER

Paris Correspondent, ELECTRICAL EXPERIMENTER

Paris, April, 1919.

X-RAYING AIRPLANE.

MANY great personalities of the aeronautical world have recently witnest the baptism of the "Aérochir" (from aëro and chirurgeon) at Issy-Les-Moulineaux, near Paris, at the trial of an airplane used for X-raying chirurgical purposes.

The new machine came thru the air from Ville-Coublay, having been in the air for over an hour. This flying ambulance, which can bring medical aid rapidly to the wounded, was designed by MM. Nemirovsky and Tilmont and is painted with the conventional Red Cross. It carries all the chirurgical material such as instruments for operating, sterilization, etc., all X-ray machinery, such as a spark coil, transformer, X-ray tubes, fluoroscope, as well as the personnel capable of putting the apparatus to work immediately. The attendants comprise a pilot, chirurgeon and a professional X-ray man. The entire apparatus does not weigh more than 700 kilograms. In peace times a machine of this kind may be used with great success in case of catastrophes, railroad accidents, explosions, etc., which may take place in an isolated spot. In the colonies the "Aérochir" will find large application; colonies naturally not being well populated and having few doctors, located in widely separated points, it will be an easy matter to bring quick aid to patients by means of the "Aérochir," to which distances are immaterial.

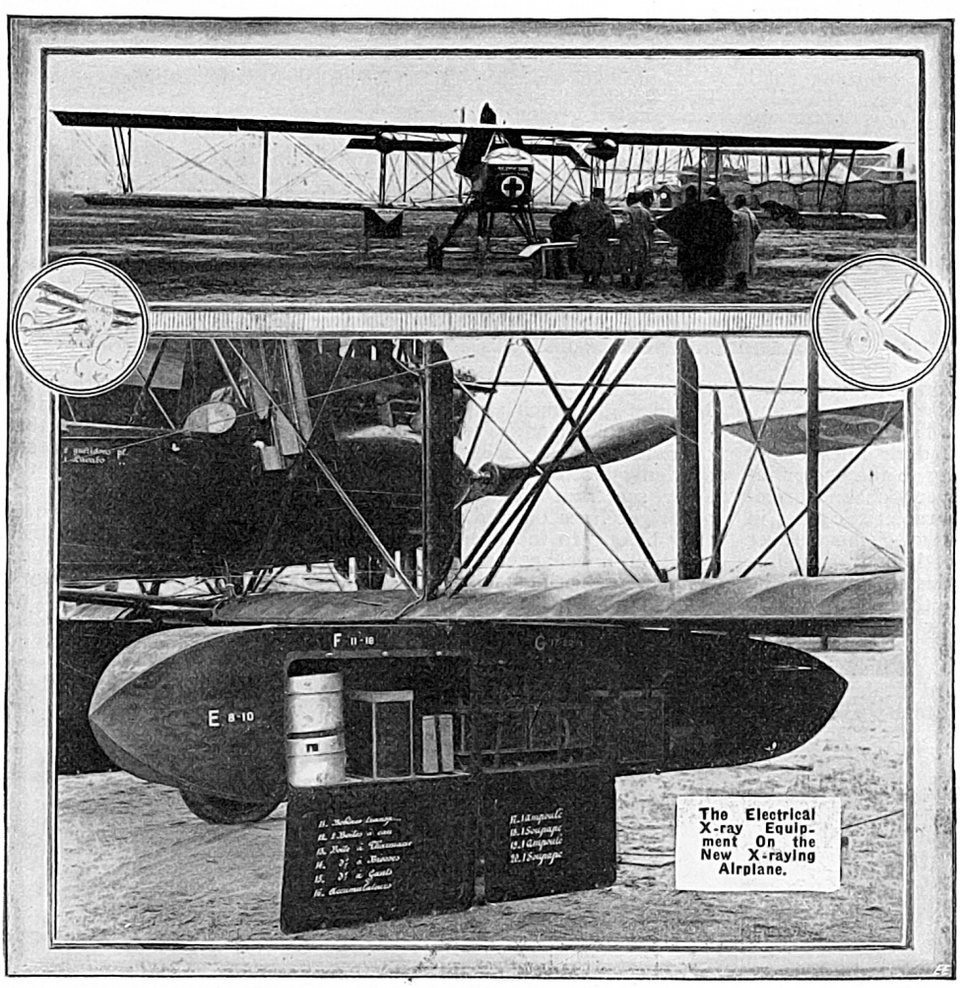

The Electrical X-ray Equipment On the New X-raying Airplane.

DR. BERGONIÉ'S NEW RHYTHMIC FARADIZATION.

Many wounded soldiers in the war have seemingly recovered, with the exception of certain muscles which refuse to resume their normal work. Formerly the best method to make these muscles return to normal conditions would be by means of continuous muscular work, as suggested by Dr. Bergonié. One method required professional work or agricultural occupations every day for an indefinite time of the affected members in order to reconstruct the muscles and put them on a normal basis once more. Unhappily, it is not always possible to do this, be it on account of nervous fatigue which sets in rapidly; be it by unseasonable weather, or also where the muscles are so situated that bodily work will not profit them greatly.

For that reason, Dr. Bergonié has brought into being what he calls an *intensified Rhythmic Faradization,* which makes it possible for the wounded to develop their muscles in a remarkably short time. Moreover, such treatment gives the muscles a very strenuous involuntary exercise produced directly by the electrical current.

From the electrical standpoint, the alternating rhythmic faradization utilizes very sharp waves of a frequency giving rise to a moderate convulsing action (50 to 55 per second). The current is produced by a special coil with a well-regulated vibrator, the coil itself giving no sparks. The waves under pressure of between 12 and 14 volts maximum have a periodicity of 15. By means of a standard metronome the current is dis-

(*Cont. on page* 151)

Popular Astronomy

By ISABEL M. LEWIS

of the U. S. Naval Observatory

The Evolution of the Stars

IF a ray of white light from the sun is past thru a spectroscope, which consists essentially of a glass prism or chain of prisms, it is broken up into its component rays of different wavelengths which arrange themselves in an orderly band of variegated colors: red, orange, yellow, green, blue, indigo and violet gradually blending one into the other crost by a great number of fine dark lines known as the *Frauenhofer lines* or absorption lines of the solar spectrum. The shortest wave lengths lie in the *violet* and the longest wave lengths in the *red* end of the visible spectrum. Below the red lie the infra-red and beyond the extreme violet the ultra-violet rays, both invisible to the human eye but rendered visible to a certain extent by means of photography and specially dyed plates.

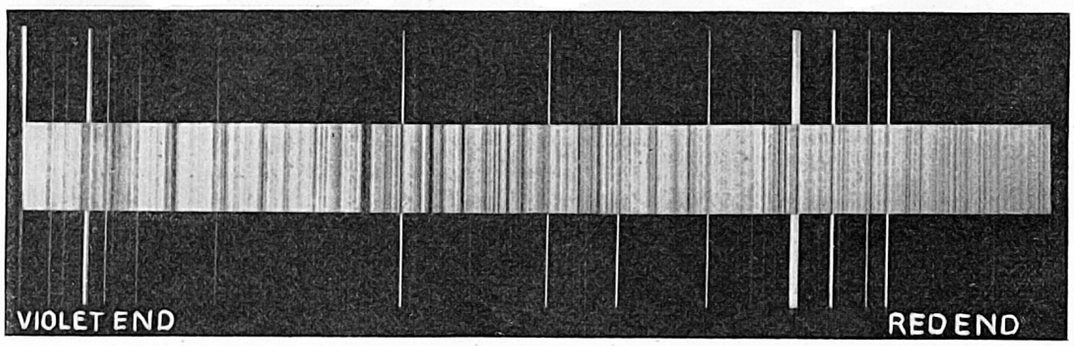

1. Beta Geminorum (Pollux) Solar-type Ko Slightly More Advanced in Type Than Our Own Sun Which Belongs to Type G.

According to the first law of spectrum analysis an incandescent solid or liquid or gas under very high pressure gives a continuous spectrum, that is, an unbroken band of variegated color. If however, cooler gases intervene between us and the source of the continuous spectrum, they will absorb from the light beyond the particular rays of which they themselves consist and as a result the continuous band of color will be crost by a series of dark lines called *absorption lines,* belonging to the cooler intervening gases. To every chemical element belongs its own characteristic lines in this spectrum and no two elements ever have any line or group of lines in common.

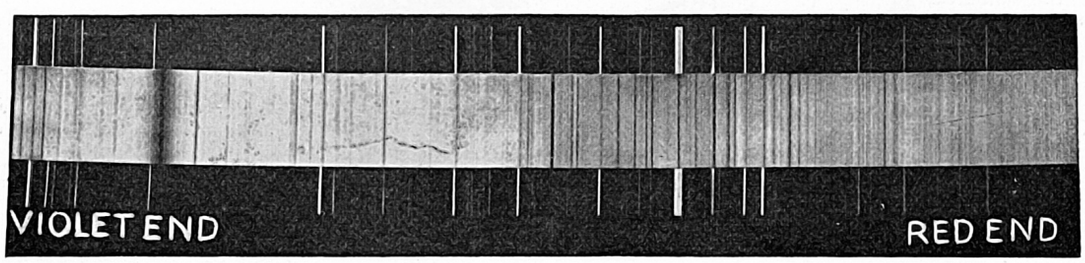

2. Eta Lonis—Helium Approaching Solar Type (Harvard Type Aop). Hydrogen Lines Have Increased In Intensity, Helium Also Visible But Fainter Than Above and a Few Metallic Lines Begin to Appear.

Applying these principles to the sun, the central core, consisting either of an incandescent solid or liquid or gas under high pressure (most probably the latter), emits the continuous band of light known as the *continuous spectrum.* The cooler gases of the surrounding solar atmosphere absorb from the light of this central core the particular rays of which they themselves consist and thus produce the multitudinous fine dark lines known as the absorption lines. It is upon the position of these dark lines that we depend for our knowledge of the physical condition of the sun, for obviously, there is nothing in the continuous band of color itself to give us any clue to the nature of the substances from which it originates. If, as sometimes happens, the continuous spectrum is crost by *bright* lines instead of *dark* lines, it shows that the intervening source of light is hotter than the source beyond. An incandescent gas at low pressure, such as incandescent hydrogen, gives a bright-line spectrum or emission spectrum consisting of bright lines upon a dark background. Such a spectrum shows that the body emitting it is a true gas. Nebulae give such a type of spectrum indicating that they are true gases. If, moreover, the central core of the sun could be suddenly blotted out the dark lines of the solar spectrum would immediately appear as bright lines on a dark background, for they belong to incandescent gases, the absorption lines appearing dark by contrast with the more intense light beyond.

It is upon these principles of spectrum analysis that our knowledge of the physical constitution of the stars depends. The sun is simply one of the stars and the solar spectrum is duplicated almost line for line in a certain type of star known as the *solar stars.* Most of the chemical elements existing in the sun's atmosphere have been identified by comparing the dark absorption lines in the solar spectrum with the lines in the spectra of terrestrial elements produced in our laboratories. It has been found *that all the elements that exist on our own planet occur also in the sun* and the same elements that exist in planet and sun enter into the composition of the stars.

By passing a ray of light from a far distant star thru the spectroscope and producing its spectrums, it becomes possible to compare the positions of its characteristic lines with the lines of the same elements in the solar spectrum. It is in this way that we learn the nature of the atmospheric gases of the stars. It must be remembered that it is the *surface* conditions of the stars and their *outer* gaseous envelopes that can be studied by the spectroscope. From the star's deep interior we receive only the continuous band of color.

The first general classification of the stars according to their spectra was made by Father Secchi, the Italian astronomer, and was publisht in 1849. It was the result of a study of the visible portion of the spectrum with a small telescope and only stars showing dark absorption lines were studied. Since that time more elaborate classifications of stellar spectra have been made—chiefly at the Harvard College observatory, where many thousand spectrograms (photographed spectra) have been studied and classified. The Harvard classification of star spectra has now been generally adopted by all astronomers The importance of the work done along this line at the Harvard Observatory can be judged by the fact that the Henry Draper catalogue of stellar spectra now in process of publication by this observatory *gives the spectra of two hundred thousand stars.* The first two volumes of the catalogue, which consists of nine volumes in all, are

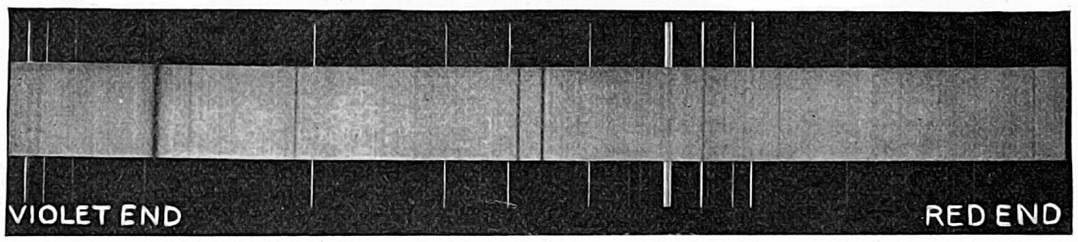

1. Rigel (Beta Orionis)—A Helium Star Showing Strong Absorption Line of Hydrogen (to Left) and Helium (Near Center) and Absence of the Metallic Lines Characteristic of Solar Type Stars.

already in print. The great value to astronomy of this monumental work, which was undertaken and completed under the personal direction and supervision of the noted director, Prof. E. C. Pickering, just deceased, can hardly be overestimated. This detailed classification of star spectra shows forcibly that *evolution* is in progress among the stars. As to the exact order in which the evolution is taking place, there is still some doubt, but of the gradual transition from type to type in whatever order the evolution is progressing there can be no doubt. According to the classification of Antares and Betelgeuse are noted first magnitude stars of this class. Type IV consists of *deep red* stars, whose spectra are also banded or fluted, but the bands are due in this case to compounds of carbon. Their relation to the other types is somewhat uncertain, but they are believed to be connected with solar type stars by a chain of development independent of stars of the third type. That is, some solar stars develop into type III stars, others into type IV stars. Stars of this latter class are all very faint and very distant. It is believed that they are giant stars in absolute magnitude, their faintness being due to great distance.

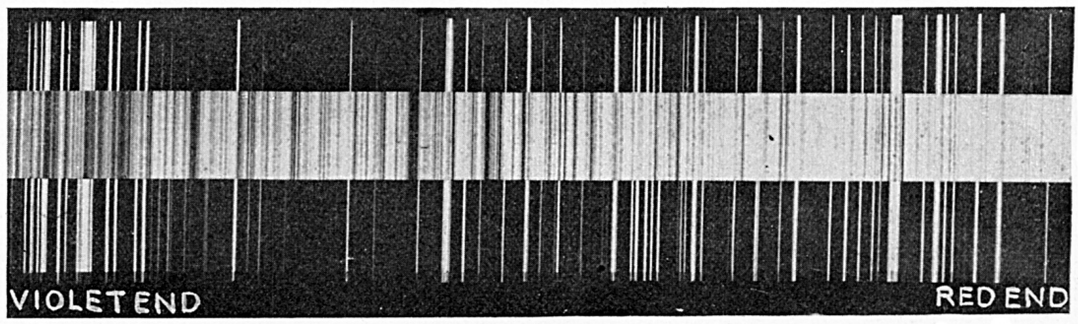

2. Alpha Tauri (Aldebaran) Advanced Solar-Type K5. Note: The Comparison Spectrum Shown Above Is That of Titanium. The Spectrum of the Star Is Superimposed Upon the Comparison Spectrum. Note in Above Spectra the Great Intensity of the Lines of the Metallic Elements Which In the More Advanced Types Have Become Stronger Than the Absorption Lines of Hydrogen Which Dominated the Spectra of Earlier Type Stars. As the Absorption Lines of the Metallic Elements Increase In Intensity the Color of the Star Becomes More and More Tinged With Red. Solar Type Stars Are Cooler (Superficially At Least) and Have Denser Atmospheres Than Stars of Type I (Helium and Hydrogen Type Stars).

Father Secchi, which is useful for quick and approximate classification, the stars are divided into four classes or types. To Type I belong all the *bluish white or white* helium and hydrogen stars. These stars are believed to be the hottest of all the stars, and their atmospheres consist almost entirely of helium and hydrogen gases. To this class belong the Orion (helium) and Sirian (hydrogen) stars such as Rigel, Sirius and Vega.

Type II consists of the solar stars *yellow or orange* in color, whose spectra are dominated by the absorption lines of hydrogen and the metallic elements. They are generally considered to be lower in temperature than type I stars, and their atmospheres are denser and more extensive and filled with the vapors of many elements. The sun is a star of this type, and to this type also belongs such first-magnitude stars as Capella, Arcturus and Aldebaran. Type III consists of late type stars with banded or fluted spectra due to the presence of metallic compounds, chiefly of titanium oxide which appears to dominate the spectra of stars of this type and indicates a cooler atmosphere than exists in the earlier type stars, since compounds of the elements can only form at comparatively low temperatures. The absorption is strong in the violet end of the spectra of such stars, therefore they are *deeply reddish* in tinge.

The Harvard classification is much more complete than the above. It rests upon the behavior of certain groups of lines that vary in intensity as the evolution progresses. It also assumes that the evolution of the stars starts from the gaseous nebulae and is in the direction of the late type red stars.

The spectra of the gaseous nebulae consists of bright lines of helium, hydrogen and nebulium upon a dark background. They are therefore true incandescent gases under low pressure. The first link connecting the nebulae with the stars appears to be the bright-line stars not recognized in the Secchi classification. They are referred to as the type O or Wolf Rayet stars in the Harvard notations, and their spectra show a faint continuous background (implying the formation of a central core) crost by a group of bright bands and a series of bright lines, both unknown terrestrially for a long time but finally obtained experimentally by passing a strong condensed discharge thru a mixture of hydrogen and helium in a vacuum tube. The ordinary well known hydrogen series also appears in this type, first as bright lines, but as the type progresses the bright bands and bright lines of both series become dark showing the formation of an atmosphere of cooler hydrogen and helium around the star. With the total disappearance of the bright lines and bands and the strengthening of the dark lines of helium and hydrogen, type O passes over into type B, to which belongs the beautiful blue white helium stars often called Orion stars because so many stars of this constellation are of this type. These stars have the hottest temperature and the rarest atmospheres of all the stars. The only absorption lines prominent are those of helium and hydrogen. There are a number of subdivisions of this type depending upon the relative intensity of the lines of the two gases. Toward the end of the type the hydrogen lines have become more intense than the helium lines, and faint metallic lines have begun to appear until by gradual transitions the hydrogen stars appear known as type A, or Sirian stars, after Sirius, a noted star of this type. The helium lines are now entirely gone and the spectrum of the star is entirely dominated by intense absorption lines of hydrogen. Four strong lines of this element exist in the visible spectrum (see diagram 1) and the series extends rythmically far into the ultra-violet. These stars are intense white in color and their atmospheres are composed almost entirely of incandescent hydrogen. As the type progresses the faint metallic lines of the solar spectrum become stronger. The hydrogen lines reach their maximum strength in class A. (See photo of early type stars.) The next type to appear is known as the Calcium or type F group of stars which is characterized by the growing intensity of the lines of the metallic elements, which are now closely packed together in the spectrum, and by the very marked intensity of the calcium bands in the extreme violet and the continued great strength of the hydrogen lines which surpass any of the metallic lines in intensity. (See photo of type F star Procyon). To this class belongs

(*Continued on page* 157)

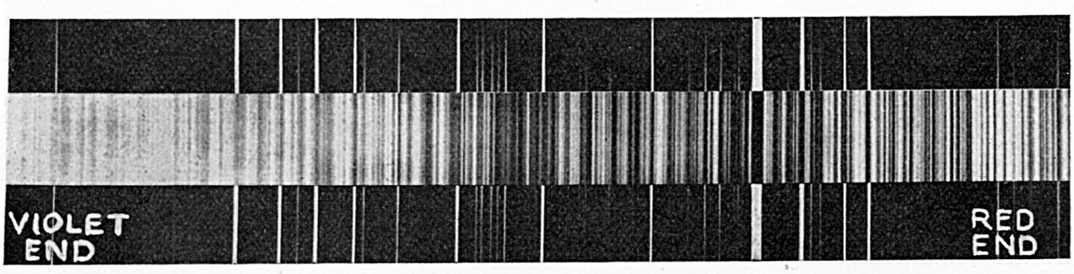

Secchi's Type III, Harvard Type M Star. This Class Is Divided Into Giant (Type Ma) Stars and Dwarf (Type Mb) Stars—Color, Deep Red. The Spectrum Shown Is That of a Typical Giant (Ma) Star of This Class—Betelgeuse or Alpha Orionis. The Portion of the Spectrum Shown Is In the Blue Region. Note the Heavy Absorption In This Portion of the Spectrum and the Fluted or Banded Appearance Due to the Presence of Compounds of Titanium Oxide (Characteristic Also of Sun Spots and Indicating Comparatively Low Temperature). The Heavy Absorption of the Blue Rays Gives These Stars Their Deep Reddish Color. The Bands or Flutings Are Sharp Toward the Violet and Shade Away Toward the Red. There Is a Fourth Class of Stars Known As Type IV, Harvard Type N or Carbon Stars, In Which the Direction of the Shadings Is Reversed. These Stars Are Also Very Deep Red, Few In Number and Very Distant, the Brightest Known Being Only a Fifth Magnitude Star.

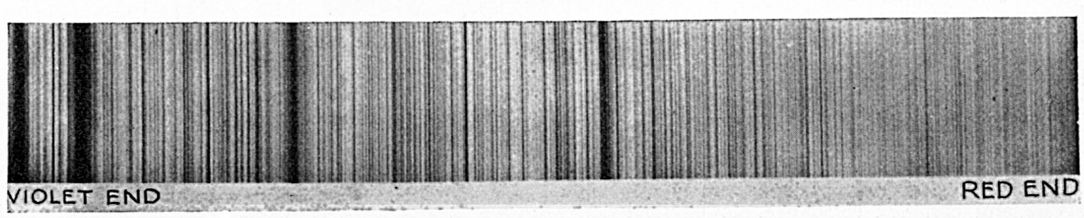

Spectrum of a Calcium or Harvard Type F Star—Alpha Canis Minoris (Procyon) Intermediate Between Secchi's Type I and Type II Stars, Color White Tinged with Yellow. The Portion of the Spectrum shown Runs From the Blue Green At the Right to the Extreme Violet At the Left. The Two Dark Bands At the Extreme Left Are the Strong Absorption Bands of Calcium So Prominent In This Type. The Other Three Dark Lines Are Absorption Lines of Hydrogen. A Fourth Line of Hydrogen Is Also Present So Close to the Second Calcium Band That They Appear Practically As One Band. The Metallic Lines Now Appear Closely Packed Together and of Growing Intensity. This Type of Star Is Dominated by the Absorption Bands of Calcium and the Absorption Lines of Hydrogen Which Are Stronger Than Any of the Metallic Lines.

Practical Chemical Experiments

By ALBERT W. WILSDON

FEW of the millions of people who eat eggs daily are familiar with, and in most cases never concern themselves with the chemical or physiological properties of this form of food. The daily consumption of eggs thruout the world is truly enormous, and the

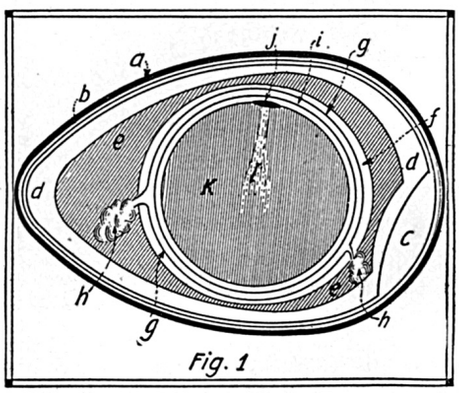

Longitudinal Section of a Hen's Egg. a, Shell; b, Double Membrane of Shell; c, Air-Chamber; d, Outer, or Fluid Albuminous Layer; e, Thick, Middle Albuminous Layer; f, Inner Albuminous Layer; g, Membrane of the Chalaza; hh, the Chalaza; l, Vitelline Membrane; j, Germ; k, Yolk; l, Latebra. (After Macé.)

present high prices have caused many dealers to preserve eggs till the market is at a high point and then unload them, in many cases with the representation that they are *strictly fresh!* Eggs contain a relatively large proportion of *Proteid* and mineral matter which is used to furnish the salts of the bones, especially calcium phosphate, and also fat, and is one of the most concentrated forms of nutriment.

Proteids serve as a fuel for the body and also provide the important element Nitrogen, which is needed in the case of children for growth, and in the case of both children and grown people, to keep the body in repair.

Strange as it may seem, even eggs, the contents of which are contained in a brittle shell, have had substitutes placed upon the market in the guise of "egg substitutes." Nearly all these are claimed to contain all the ingredients of eggs, but most of them fall far short of these claims. There is a number of so-called *egg powders* offered for making cakes, etc., *which contain no egg at all.* They are composed of other forms of protein matter, usually casein from milk, and colored to resemble the egg in tint.

The average weight of a hen's egg is 60 grams, of which the shell weighs about 6 grams, the white 36 grams, and the yolk 18 grams. Roughly it contains 70% of water, 12% of albumin and 12% of fat.

The substance known as "white of egg" or egg albumin, when separated from the yolk, membrane and shell is a colorless, transparent, thick, sticky fluid, soluble in or miscible with water and is composed almost entirely of albumin, partially dissolved in water.

When the white of an egg is put into boiling water it undergoes a remarkable change, and is said to have *coagulated.* In this state it is insoluble in water and opaque and forms a solid mass, which, however, still contains a large proportion of water. During coagulation it is probable that chemical as well as physical changes have occurred. Thus from the foregoing we see that the white of egg is an extremely unstable and complex substance, its physical properties being so indefinite that it would be almost impossible to say that it was or it was not a definite chemical compound.

Eggs: Their Preservation and Tests

White of egg or egg albumin may, however, be taken as the representative of a group of substances which are classified together as the *Proteids,* or *Albuminoids.* They contain the five elements, Carbon, Hydrogen, Oxygen, Nitrogen and Sulfur.

Egg yolk is composed of albumin, fat, and a phosphorus bearing material of high nutritive value known as *Lecithin.* The yolk of an egg is a much richer food product than the white, containing in addition to the nitrogenous element the fat and mineral bodies necessary to nutrition.

PRESERVATION. Of particular interest to the reader will most likely be the methods of preserving and tests.

Owing to the porous nature of the shell, the moisture of the contents gradually grows less by evaporation, and the egg loses in weight. Air also passes in thru the shell pores, carrying various microbes, which result in ultimate decomposition and spoiling of the egg. Nature has provided the shell with a thin surface coating of mucilaginous matter, which, however, is easily washed off. This coating tends to partially close the pores, and for best results in keeping should not be removed by washing.

By coating the eggs artificially with a varnish or film of some kind the egg will be rendered impervious to air and water. One of the cheapest, simplest and best of these coatings is *Water-glass.* This is produced by dissolving the substance known as Sodium Silicat (or Silicat of Soda) in water, and applying the same, by dipping the egg into the solution and removing and allowing to dry. The Silicat of Soda which is thus left in a thin film over the surface of the egg penetrates and stops the pores and renders the egg-shell practically impervious both to air and water. This material possesses the property of becoming totally insoluble in water when it has once been dried so that even if the egg is afterwards subjected to contact with water the film is not removed.

One drawback to this method is that eggs so treated break more easily on boiling. This breakage may be prevented by carefully piercing the shell with a strong needle before being put into the water.

Gelatine, vaseline, wax or gum are other substances used for coating or varnishing the egg, tho they are not as efficacious as the water-glass.

Another proposed method is to immerse the eggs in boiling water for twenty seconds with the result that a very thin layer of the egg-white next to the shell becomes coagulated, thus forming an impervious coating *inside the shell.*

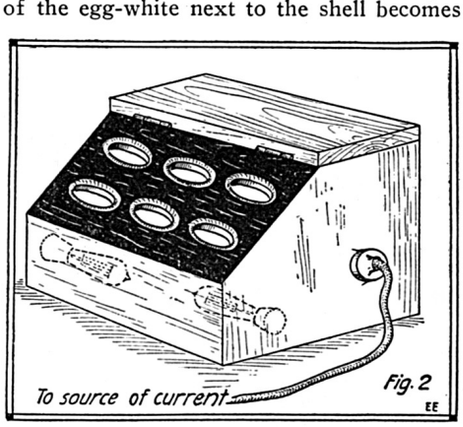

A 110-Volt Two-Lamp Egg Candling Cabinet with a Capacity of Six Eggs. It Can Be Easily Built by Anyone or Purchased as Desired.

PHYSICAL EXAMINATION OF EGGS. Various physical tests have been prescribed for ascertaining the approximate age of an egg.

THE SALT SOLUTION TEST consists of placing the egg in a 10% salt solution. **If perfectly fresh, the egg will sink to the bottom. If it remains immersed in the liquid, it is to be considered at least three days old. If it rises to the surface and floats thereon, it is more than five days old.** This test is a rough one, is quickly applied, and will distinguish the really fresh egg from one which is even a few days old, but is useful only for eggs that have been kept in air. Preserved eggs cannot be gaged by these means. It is possible also to apply the sinking and floating tests on a large scale. Salt water tanks of any size may be easily constructed into which hundreds of dozens of eggs may be placed at one time, thus effecting a speedy separation of *sinkers* and *floaters,* and at a minimum expense. There are some instances where a fresh egg will not sink in these circumstances, but such cases are not numerous enough to be of any importance.

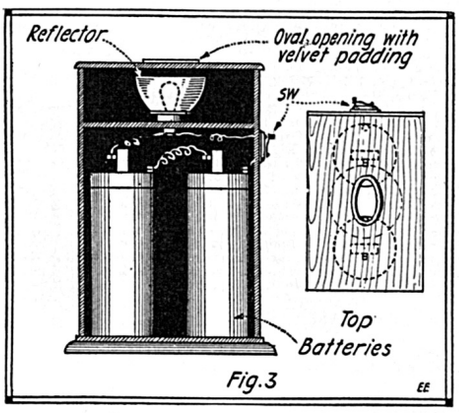

Battery Type of Egg Candling or Testing Cabinet Which Anyone Handy with Tools Can Easily Construct. The Lamp and Reflector Can be Obtained at Any Supply Store.

CANDLING TEST. The best method of examining eggs for freshness is *"candling,"* the process consisting in placing the egg between a bright light and the eye. **If the egg is fresh it will show a uniform rose-colored tint, without dark spots.** Moreover, there is to be found in the larger end of a fresh egg, between the shell and the lining membrane, a small air cell, occupying *one-twentieth* of the capacity of the egg, which is distinctly transparent. *In an egg which is not perfectly fresh this space, unless the egg is stored with the large end up, becomes filled with egg substances and presents the same appearance as the rest of the egg. If dark spots are found in the egg, it is certain that the egg is not perfectly fresh, and its appearance will be more or less cloudy, being darker as the eggs grow older, becoming in extreme cases opaque.* At the same time the "air chambers" mentioned before grow larger as the age increases. The so-called *"spots"* are eggs which show on "candling" black patches due to fungi.

The best of all tests, however, is to open an egg and examine its general appearance, its mobility, and its odor and taste. Eggs which have been stored some time show a tendency in the white and yolk to run together, and when this phenomenon is observed it may be certain that the egg is not a fresh one, altho no perceptible odor of

(*Continued on page* 154)

Experiments in Radio-Activity

By IVAN CRAWFORD

PART IV (Conclusion)

IN the previous installments of this series the properties of the radiations from radio-active substances have been discust. It is the author's intention in this article to explain the radio-active transformations and to show that in reality *these changes are a transmutation of the elements.* Experiments will be given showing the rise and decay of the active constituents. For a more detailed account the reader is referred to Sir Ernest Rutherford's "Radio-active Substances and Their Radiations."

The disintegration theory was first proposed to account for the continuous production of thorium X from thorium compounds. This change from thorium to thorium X is in reality a breaking down of the thorium atom which has an atomic weight of 232, and the formation of the thorium X atom which has an atomic weight of 224. This is accomplished by the emission of two alpha particles. There are, however, two intermediary products, namely, mesothorium and radiothorium. Radiothorium is, however, chemically inseparable from thorium and mesothorium inseparable from thorium X, and are in reality isotopes. The word isotopes is used to designate two substances which have the same chemical properties, but different atomic weights. The rate of decay of an active substance may be calculated by using the formula given in the second article for the retardation of alpha particles. In this case I_e is the initial activity, I_t is the activity after time t, e is the base of the Naperian logarithms (2.7182), and λ in the case of thorium X is .19 days. Using this equation the decay curve may be plotted. The two assumptions of the disintegration hypothesis as given by Rutherford are: (1) that there is a constant production of fresh radio-active matter by a radio-active substance, and (2) that the activity of the matter so formed decreases according to an exponential law with the time from the moment of its formation.

An experiment proving the disintegration hypothesis will now be given. About 5 grams of thorium nitrat or some other thorium salt are dissolved in water. This solution should be left standing for about 2 days for reasons which will be given later. The thorium nitrat solution is then diluted to about 200 c.c. The solution should be heated and ammonia added in excess. The thorium and some impurities are precipitated as a hydroxid by the ammonia. The thorium X, however, remains in the solution with the mesothorium. The solution is now filtered and the precipitat dried for future use. The filtrate should be boiled down to dryness to remove all traces of the ammonia salts. The residue contains the thorium X. The solution when concentrated should be transferred to a watch-glass and dried upon it to facilitate handling. In the accompanying illustrations the apparatus necessary to perform these separations is clearly shown.

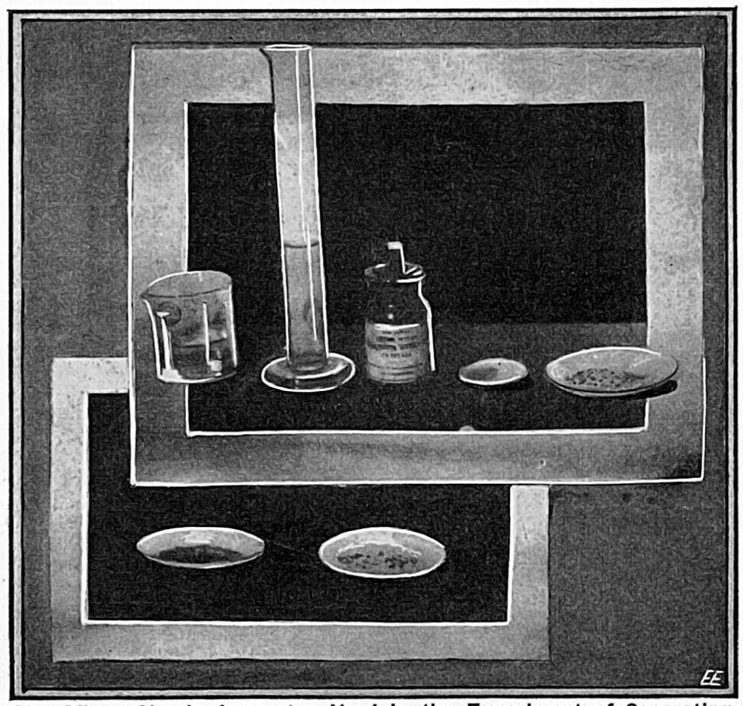

Top View—Simple Apparatus Used in the Experiment of Separating Thorium "X" from Thorium Nitrate. This Experiment Proves the Hypothesis of Radio-active Transformation or the Transmutation of the Elements. Lower View—Watch Glasses Used to Hold Thorium "X."

The reason for letting the thorium nitrat solution stand several days before using had now better be explained. Thorium compounds have been found to give off an active gas known as *thorium emanation.* This emanation when it decays forms an active deposit. In salts this deposit is always present as the emanation is occluded in the solid, and allowed to change into the deposit. This deposit, however, decays in a short time. If the thorium solution were used fresh, the thorium X would contain some of this active deposit, thus causing an initial rise in activity instead of a gradual fall. When the solution is allowed to stand for several days the amount of active deposit remaining is negligible. No more is formed, as the emanation escapes from the open vessel not being held by the solution.

The watch glass or metal plate having the thorium X deposited upon it is now introduced into the radio-active electroscope. The rate of discharge is then noted as outlined in the first article. The activity should then be measured every 12 hours for about 12 days, and the results tabulated. These figures then are the measure of the decay of the thorium X at different periods. These figures may be compared with those calculated by using the equation given in the second article. The results should now be plotted on a graph.

The plotting of the decay curves of active substances is extremely simple, the ordinates represent the activities as determined by means of the ionization current, and the abscissae represent the time in days. In arranging the graph the lower abscissa should be divided into 12 divisions to represent the 12 days in this experiment. The ordinate to the left is divided into 10 parts to represent the change in activity. The initial activity is denoted by 10 and the other activities arranged proportionally on the ordinate. The activity, then, for each half day is marked on the graph by a small circle or dot. A curve joining these circles represents the decay curve of thorium X. Irregularities at the beginning may be caused by the active deposits remaining in the solution.

The thorium nitrat or hydroxid as it is after the chemical reaction can be measured in the same way as the thorium X. It will be found that the thorium hydroxid increases in activity due to the production of thorium X. The curve denoting the rise in activity of the thorium salt is the exact complement of the curve of thorium X. Two such curves are shown in the accompanying graph. They illustrate the theoretical decay and production of thorium X. This experiment shows conclusively that it is possible for one substance to change into another. If this transmutation could be controlled the goal for which alchemists sought would be realized. In this experiment the thorium gives rise to an active substance several thousand times as active, weight for weight, than the thorium from which it was separated.

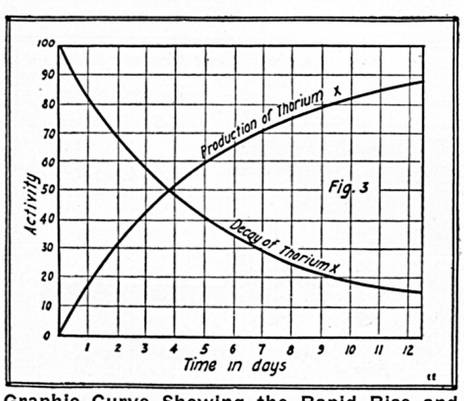

Graphic Curve Showing the Rapid Rise and Decay Periods of Thorium "X," in Days, as Well as the Relative Activity. The Decay Is Measurable by Means of the Sensitive Electroscope Previously Described.

As the reader goes deeper into the study of radio-activity the question may sometimes occur to him whether or not the property known as radio-activity is limited to a certain group of substances such as have been described here. This question has occurred to several scientists and has been met with various answers. It is, however, merely a subject for speculation, as it is impossible to secure any conclusive experimental evidence. The reason for this is apparent, as the rate at which they would give off rays is so small and their lives so long that they would have to be observed over millions of years to detect any visible change.

Radio-active compounds are being used more and more in modern every-day life. What was at first merely a peculiar phenomena is now an important branch of science. Prominent scientific magazines and institutions are now regarding radio-activity as a separate and distinct science. Large laboratories have been established for the study of this phenomena. Thousands of dollars have been spent in the establishing and equipping of factories for the extraction of uranium and radium from the carnotite. It has found extensive use in large hospitals for the cure and treatment of cancers and skin diseases. This line of research should appeal to every experimenter of the present day. It has given

(*Continued on page* 151)

THE CONSTRUCTOR

How to Build an Efficient Medical Coil Set

By H. WINFIELD SECOR

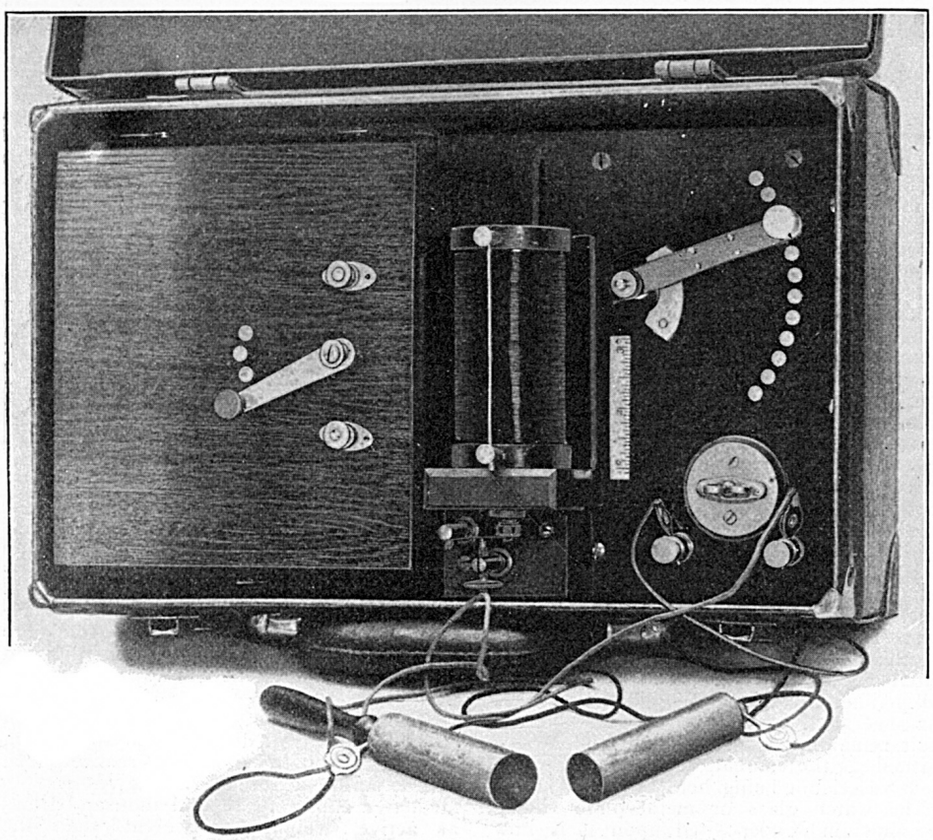

Appearance of Finished Medical Coil Set in Carrying Case as Built by the Writer. This Coil Is Adapted to All Kinds of Testing Work, Besides the Treatment of Various Bodily Ills, Such as Rheumatism. The Primary, Secondary or Tertiary Current and Combinations of Them Are Controlled by a Double-Pole Switch.

THE aim of this article is to give the constructional details so that anyone interested in shocking or medical coils may build his own apparatus at a slight cost. The outfit will produce equally as good results as any of the commercial apparatus, for all usual requirements. Medical coils are widely used for the treatment of rheumatism and other bodily ills and pains, besides furnishing lots of amusement and fun for the young folks. Not only this, but such a coil as the one here described lends itself very well to many kinds of testing, and it also can be used for telegraphing along railroad tracks for several miles, after the manner of the U. S. Signal Corps buzzer sets. We will take up the construction of the individual parts of the apparatus in detail.

Induction Coil.

The induction coil used in the present apparatus need not be as carefully insulated and constructed as that intended for producing sparks with corresponding high potentials, which constantly tend to break down the insulation between turns and between layers of wire. As the detail drawings show, the usual secondary coil is supplemented by a second fine wire winding, known as the *tertiary,* which is wound exterior to the usual secondary winding. The primary winding and the annealed soft iron wire core is mounted rigidly in a stationary block, made of mahogany or other hard wood, or else it may be cut out from a piece of black fiber, bakelite or hard rubber, whichever may be the handiest material for the builder. This primary supporting block has a hole drilled thru it, having a diameter of 11/32 inch, in which the iron wire core is to be emplaced. To make the core, you will require the softest iron wire you can procure, about No. 22 to 24 gage, measuring about 4 inches in length. The wires should be as straight as possible, and they are mounted in the upright block by placing as many of them thru the block as you can, gradually increasing the number in the hole by sticking some here and there around the outside and in the center, until as many wires are in the bundle as you can push in thru the hole. The core may be finally tightened up by driving a few small brads thru the front end and clipping these off with a pair of pliers. Afterward this core face against which the vibrator is to operate is filed off smooth, but left projecting from the block about ⅛ inch.

The next step is to insulate the long leg of the core projecting from the block, and this is done by winding some thin linen or silk tape along the core, lapping the tape slightly. A daub of glue or a piece of thread will hold the final convolution of tape. The block should previously have had two 1/16-inch holes drilled up from the base with a hand drill or drill press, thru which the two primary leads may pass without being seen. After passing thru one of the primary leads, so as to leave about 6 inches projecting and then coiled out of the way, we may proceed to wind the first layer of the primary. This is wound as evenly as possible, and, in all, four layers of the primary wire (No. 22 S. C. C. or enamel magnet wire) are put on, bringing out the final lead from the fourth layer thru the remaining hole in the upright. This coil may then be immersed in molten paraffin wax, or it may be given a coat of thin orange shellac. To give a finished appearance, a layer of black paper may be glued around it.

The secondary and tertiary coils are wound on the bobbin, as shown in Fig. 4, a wrapping of three layers of paper being placed between them. In winding the layers of these two coils, the length of the layer is made a little shorter than the bobbin, leaving a space of about ⅛ inch at each end, and a layer of thin paper, preferably paraffined paper, is placed between every layer. The size of wire for these two coils is No. 36 B. & S. gage, S. C. C. or enameled insulation. In bringing out the leads from this fine wire, it is the best practise never to rely on a single strand of this small size, which may easily break and cause no end of trouble; therefore several strands of

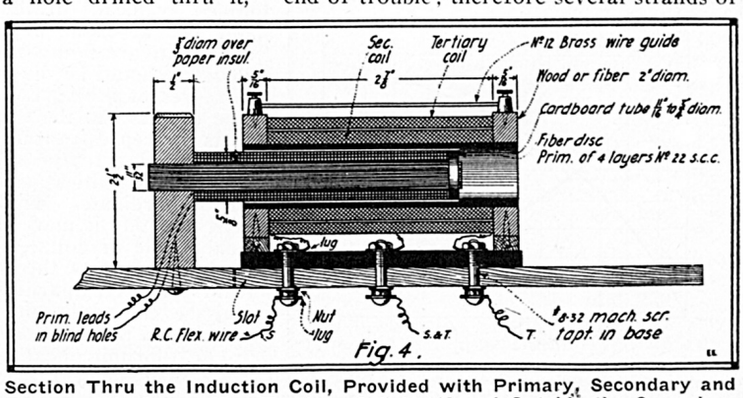

Section Thru the Induction Coil, Provided with Primary, Secondary and Tertiary Windings. The Tertiary Coil Is Wound Outside the Secondary and Yields a Mild Current, Very Desirable in Electro-Medical Applications.

the wire should be doubled up to form a sturdy flexible lead, which should be given one or two wraps around the form and tied with a piece of thread. The fine wire forming the winding is then soldered to this heavier lead. A small winding jig, comprising two wooden uprights mounted on a base together with a piece of heavy iron wire, bent so as to form a handle or crank, and a piece of round wood such as a piece of shade roller, will serve to support the secondary bobbin while it is being wound. Proceed to wind on ten layers of the specified wire for the secondary, insulating each layer from the other by a wrapping of paraffined or other paper (but not newspaper) and when the ten layers have been wound on, the joint or common lead shown in Fig. 1 should then be put in place and the wire soldered to it. After winding three layers of paraffined paper around this coil we may proceed with the winding of the *tertiary,* or third coil, which comprises eight layers of wire, each layer separated by a wrapping of paper between. The third or outer lead, coming from the free end of the tertiary winding, completes this unit, and the coil may be finished with a few wrappings of stiff paper to protect it and give it a smooth cylindrical form. The finishing coat may be a wrapping of thin hard rubber, or simply some black paper, which may be later varnished or coated with some black shellac to correspond with the bobbin ends, as the builder may desire.

The induction coil is clearly illustrated in section by the diagram in Fig. 4, and the method of carrying the three connections from the secondary and tertiary windings is simple and efficient. Instead of the older method of providing sliding shoes and metallic rails, the writer has found it much simpler and more reliable, with no chance of intermittent makes and breaks in the current applied to the patient, to secure the three leads coming from the coils to three 8-32 machine screws threaded thru the fiber or bakelite base of the coil in the manner shown. The secondary unit, as will be perceived, is permitted to slide back and forth by virtue of the slot cut thru the wooden base of the cabinet as disclosed in Fig. 2. Three rubber-covered stranded leads such as lamp cord are firmly soldered to three lugs, clamped against the heads of these machine screws by nuts under the base, as shown. It is well to place a metal washer behind the nut, and the screws are then past thru the slot in the cabinet base and screwed into the bakelite base supporting the coil. The secondary and tertiary leads are preferably soldered to three metal lugs.

Switch Details.

There are several switches used on this medical coil outfit. (The condenser and switch are optional, and are used mostly for producing a very strong current for shocking purposes.) There are also provided a three-point lever switch for the three positions of "off," "one cell" and "two cells" of dry battery, and a special *bi-polar* secondary switch.

The only special part which needs explanation in detail is the bi-polar secondary switch, and this is illustrated in detail in Fig. 5. The lever of this switch may be made from a piece of ¼x½-inch bakelite, hard rubber or fiber, preferably black in color. It is not necessary to give here the fractional dimensions for the phosphor bronze contact springs, as their size may be judged from the drawings, and each constructor will make these a little different possibly. They should in any case be approximately ⅛ inch in width and spaced 3/16 inch apart, so as to give as high insulation as possible between them. One of these springs remains flat at the rear, and is soldered to a brass lug, so as to be connected with the central supporting posts of the switch lever in the manner apparent. The second spring bends downward at the rear, and makes contact with an insulated brass segment, shown at Fig. 2, and which forms the second pole of this switch. The necessity of this switch will be evident from the diagram of connections, Fig. 1. The springs on the secondary switch may be of phosphor bronze, German silver, or hard springy brass, and can be quite light.

The secondary current distributing switch gives six different forms of current, namely, primary—secondary—tertiary—primary and secondary—secondary and tertiary—primary, secondary and tertiary— and therefore requires twelve contact points, which are spaced 11/32 inch apart.

Vibrator.

The vibrator is best removed from some cheap medical coil, or else made up by removing the armature spring from a buzzer or bell, which already has a platinum or silver contact mounted in the end of the spring. The vibrator contact screw and spring are supported on two round brass uprights, threaded for machine screws at the base, these uprights being made of about ¼-inch diameter stock. The spring should be about ¼ inch wide and fairly thin. It may be of steel, spring brass, phosphor bronze or German silver. The contact points, that on the spring and the point in the end of the vibrator adjusting screw, are preferably formed of small platinum points, or they may be the new tungsten points. Silver is frequently used, altho it is not very commendable for the purpose. These contact points are generally obtained from old bells or other electrical apparatus. The iron armature on the end of the vibrator spring, for use with this form of coil, should be about 5/16 inch in diameter and ⅛ inch thick. It may be riveted or soldered to the vibrator spring. It should be mounted so that the armature normally is about 3/32 inch from the iron core. (*Continued on page* 150)

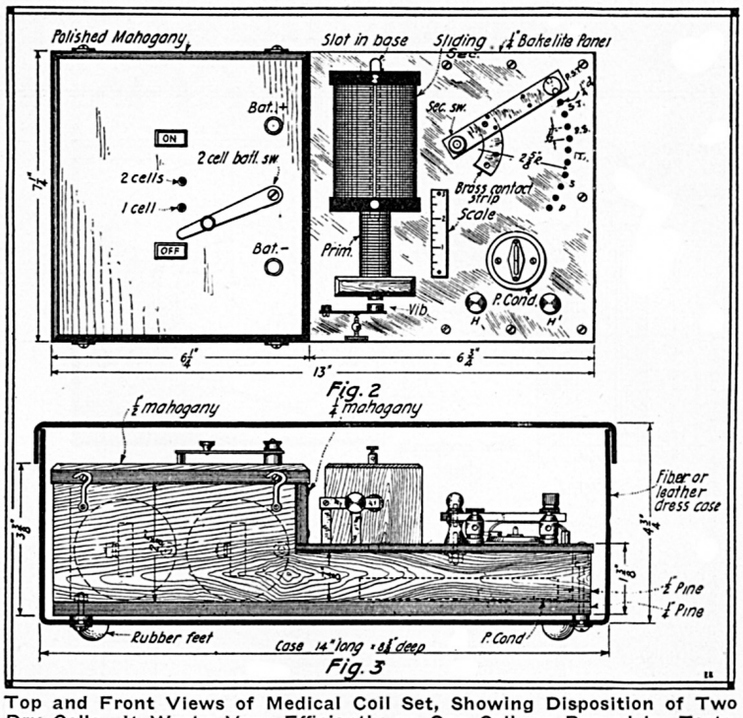

Top and Front Views of Medical Coil Set, Showing Disposition of Two Dry Cells. It Works Very Efficiently on One Cell, as Proved by Tests. The Secondary Unit Is Movable.

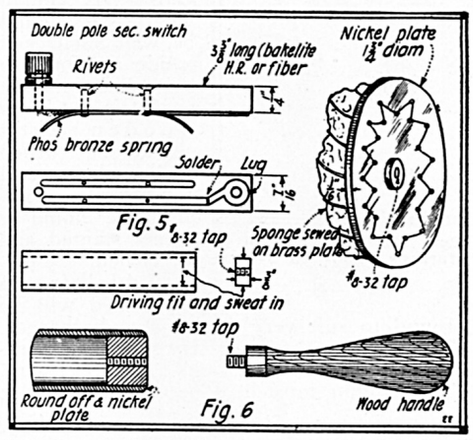

Details of Medical Coil: Handles, Sponge, Electrode and Bipolar Switch.

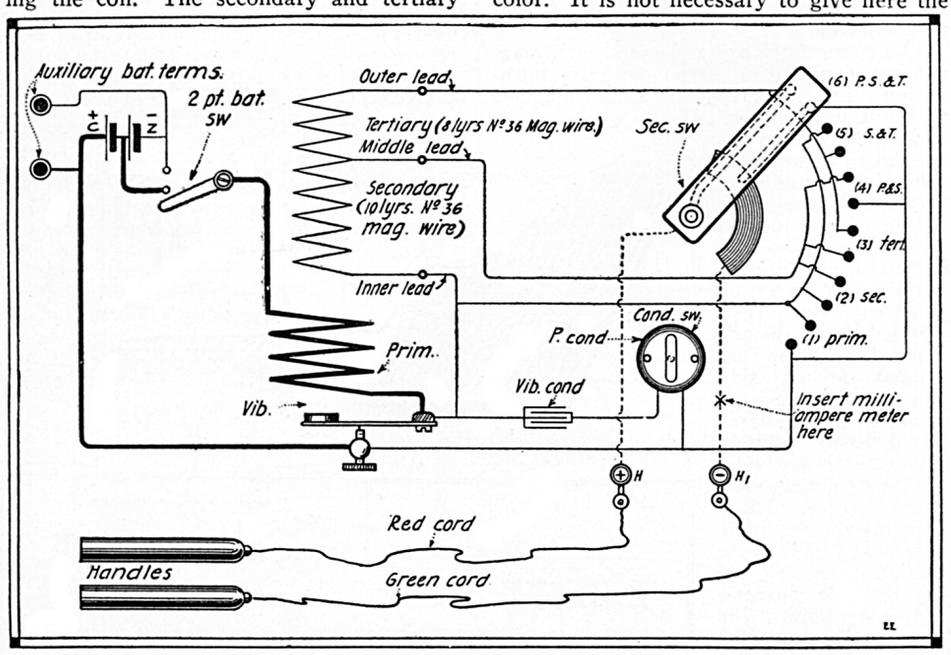

Diagram of Connections for Medical Coil Outfit Here Described. By Means of the Bipolar Current Controller any Modification of Primary, Secondary or Tertiary Current Is at Once Available.

A Small High Frequency "Oudin" Coil

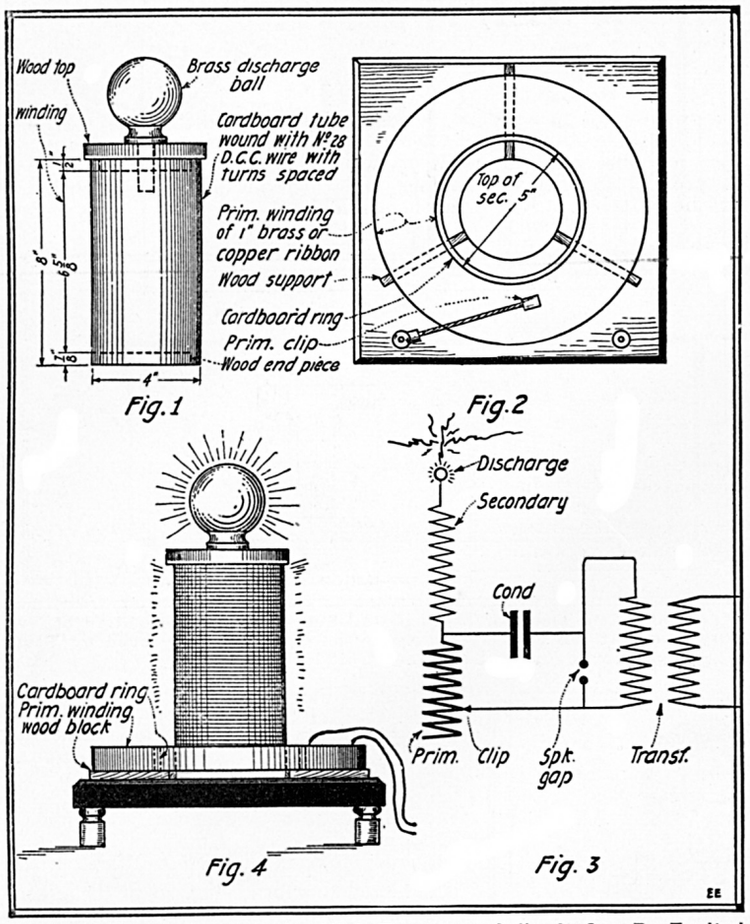

An 8- to 10-Inch Spark Oudin High Frequency Coil. It Can Be Excited by a One-quarter K. W. Step-up Radio Transformer or 6- to 8-Inch Spark Coil.

The high frequency transformer here described is of the *Oudin* type. All that is necessary to use in conjunction with it are a small wireless transformer or spark coil, a high potential condenser, and spark gap. The discharge obtained when the coil is excited by a ¼ K.W. transformer *will be from nine to twelve inches* in length, while the spray discharges will reach out to still greater lengths. The results obtained with this small coil will thoroly repay the builder for the few hours spent in the construction of this simple, yet intensely interesting piece of apparatus.

The secondary of the transformer is shown in Fig. 1. The cardboard tube, upon which the wire is wound, might well be a round "Quaker Oats" box cut to length. It should be well shellacked inside and out, so as to keep out the moisture. Two wooden ends should be turned or sawed out, and for the sake of appearance should be nicely stained and varnished. A discarded ball from a brass bed will be found to suit very well for a discharger. The wire for the secondary should be numbers 28 to 30 B. & S. D.C.C. or S.S.C. wire. The winding must be done on a lathe or else on a simple winding rig, as it cannot be evenly wound by hand. The turns are separated with a thread wound on with the wire. After the wire and thread are wound, the whole should be given two or three liberal coats of shellac (or better, "armalac"). The upper end of the winding should be fastened to the brass discharge ball. This finishes the secondary coil.

The primary is very easily constructed. It is made of one-inch copper or brass ribbon. The inside turn is taped to a cardboard ring, about 5 in. in diameter, and one inch high. This is shown in Fig. 2. The ribbon should be wound tightly, the turns separated by thin corrugated paper, such as used in packing boxes. The strip of paper should be about ⅝ inch wide, so as to allow sufficient surface of the ribbon exposed to make a variable contact with the helix clip. After nine or ten turns have been wound, the spiral should be tightened and taped on the outside. This makes a quite firm winding. The inside turn is connected to the lowest turn of the secondary, see diagram Fig. 3. Also a wire is led from this connection to one binding post. The clip is connected to the other post by a piece of high tension cable. The primary rests on wood supports, which may be of any convenient size. The base should be of ¾ in. wood, and 11 inches square. The edges should be beveled. Porcelain knobs are glued under the corners by means of wooden dowels inserted into the base, as shown at Fig. 4. The complete hoop-up is shown at Fig. 3. Fig. 4 shows the transformer assembled. In operation, the clip should be moved from turn to turn, until the best discharge is obtained. It might be well to say that the current from the secondary is of such high frequency that it is entirely harmless when taken thru the body, providing the spark is allowed to jump to a piece of metal held in the hand, and not to the skin direct.

Contributed by G. W. COOKE.

An Electro Harp

[*The idea here described and illustrated is the "germ" of the marvelous electrically played "choralcello"—the piano that gives absolutely pure music, owing to the fact that the strings are set into vibration by electro-magnets, not by striking them with mechanical hammers, as in the ordinary piano. With such electrically played instruments it is possible to produce "sustained" notes of wonderful purity. Those interested in this work will find that each string must be vibrated by its own magnet coil, and each coil excited by an alternating or pulsating current having a periodicity corresponding to the natural frequency of the particular string played. A buzzer specially tuned for each string may be experimented with.—— Editorial note.*]

Any one possessing a harp or zither and a few odds and ends to be found around any amateur work-shop, may make a most pleasing and interesting instrument.

As shown in the accompanying drawing A, is an ordinary harp having steel strings. B is a wood or fiber strip on which the required number of electro-magnets, C are mounted; i. e., as many magnets as there are strings on the harp. These are suspended so as to cover, but *not touch*, the steel strings. Suitable electro-magnets are made from telephone receiver pole-pieces, which can be purchased from any supply house. A corresponding number of push buttons D, are arranged on a separate board E, serving as a key-board. The push buttons D, are lettered according to the strings they control.

The connections are as shown, each magnet being placed in series with its push-button. The other terminals of the magnets and buttons being connected, the main wires are led to a buzzer or other interrupting device F, and batteries G.

It is a good idea to construct a special keyboard, as the push-buttons cannot be played very fast. Pivoted or spring-supported strips arranged side by side can easily be assembled on a base-board, with suitable contact points mounted under each "key" strip. These contacts can be made from silver wire, platinum points off old bells or buzzers, tungsten points, or for that matter just plain brass points or springs. The smooth action of such a hand-made keyboard will really surprise you.

The instrument can be used as an ordinary piano, pressing the buttons as if they were keys.

Contributed by CARLETON F. MAYLOT (13 years old).

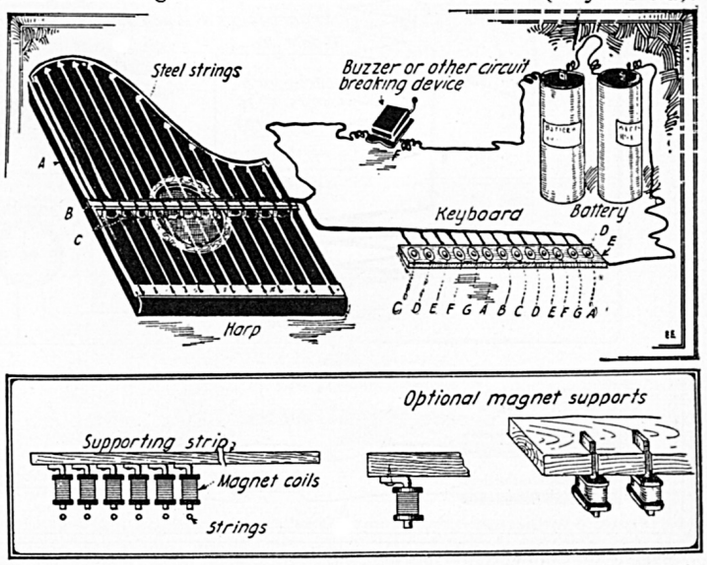

Experimental Electro-Harp Operated by a Buzzer, Which Interrupts the Current Thru a Magnet Coil in Front of Each String.

Experimental Mechanics

By SAMUEL D. COHEN

LESSON XII.

IN the last lesson we considered the theory of twist drills, and having this in mind, we shall now discuss the practical end of the twist drill. It is essential to note that in grinding twist drills it is very important to have the cutting edge

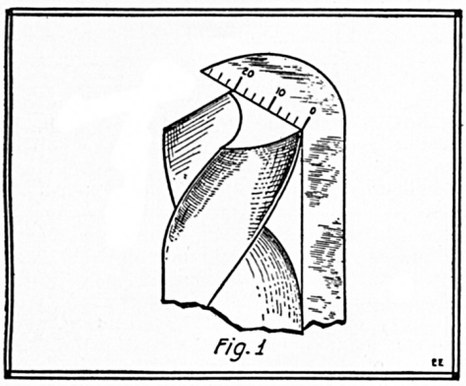

Using Grinding Gage to Test Edge of Twist Drill When Sharpening It.

at the proper angle, otherwise the drill will not cut—or it may dig into the metal, thus spoiling the same or breaking the drill. The best angle at which the cutting edge should be ground is that of 59 degrees. A gage is usually provided for determining whether the cutting edge is ground to the required angle. Fig. 1 shows the gage being used for that purpose. This gage is a standard tool, and should be found in every experimenter's tool kit.

To acquire knowledge on how to actually grind a drill by reading, is a very difficult matter for the beginner. This is a subject which he must learn by actual practise, thus gaining experience as to the manner in which the drill is held against the abrasive (grindstone or usually an emery wheel), also how to determine whether the drill is ground properly so that it can perform its necessary function.

It is advisable for the beginner to obtain a drill grinder, which can be purchased for a nominal sum. There are two kinds of drill grinders—first, that wherein the drill is controlled by hand, and the grinding of the two cutting edges is performed separately; the second type, wherein the drill is clamped and the grinding is performed automatically. The latter is used extensively in large factories, where considerable quantities of twist drills have to be ground.

The point in favor of the grinding machine is its independence with regard to the ability of the workman; also the grinding is accomplished much faster. Fig. 2 illustrates a hand-controlled, foot-operated grinding machine.

In using twist drills, it is of extreme importance to have the cutting edges properly ground. To illustrate this, the results obtained from careless and inexperienced

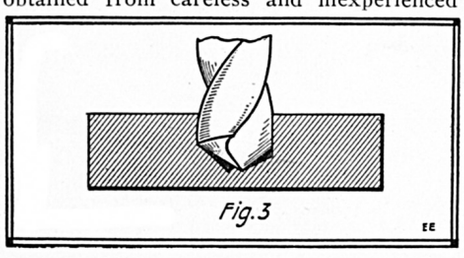

One Result of Improper or Careless Grinding of a Twist Drill. The Hole Drilled with Such a Twist Drill Tends to be Ragged; Elliptical, and in Fact Most Any Shape But Round.

use of the free-hand twist drill are clearly depicted in Figs. 3, 4 and 5. The subject is of extreme importance, and the novice is strongly advised to procure a machine that will grind his drill to the proper cutting edge angle, thereby saving some important work that he may be engaged on, which might have been destroyed by the poor, hand-ground drill.

If the sharpening is done by a free hand drill, it is advisable to observe the cutting of the metal by the twist drill: first, the chips made by the cutting; second, the size of the hole. If the cutting lips are shaped to a proper clearance, the chips will curl as they start from the cutting edge, but, if the cutting lips lack a proper clearance, the resulting chips have the appearance of being ground off, rather than freely cut. If the cutting lips are of uneven length, the hole will be enlarged over the diameter of the drill.

The next important factor with reference to drills, is their feeding speed. In order to obtain best results with drills and drilling machines, the drill should advance

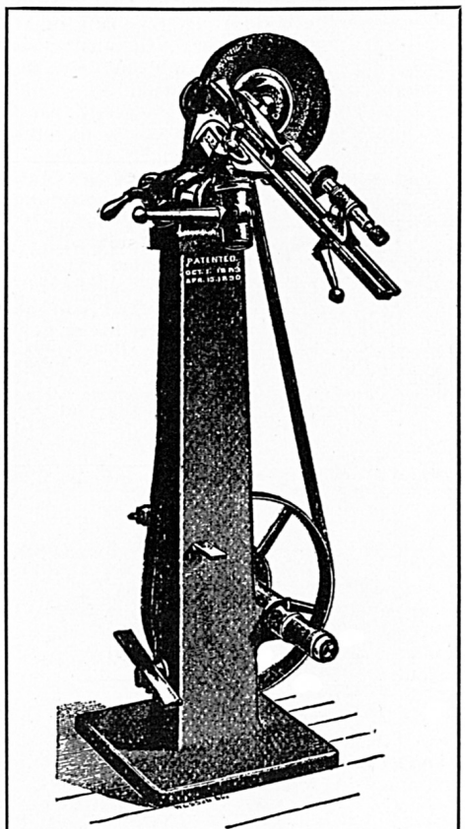

A Hand-controlled, Foot-operated Twist Drill Grinding Machine. The Drill Is Revolubly Held in a Jig At the Correct Angle Against the Emery Wheel.

into the work a definitely regulated amount each revolution. The distance which the drill advances per revolution is termed the *feed*, and must be adjusted to suit the conditions under which the work is being performed. See table at end of article.

These figures are recommended for average conditions. At times they are greatly exceeded, and at others must be greatly reduced. Feeding the drill free hand, if skillfully done, may answer in certain cases, but is less effective than power feeds, with the exception of small wire drills.

The drill speed is another important factor when considering the successful operation of twist drills. This appertains to the surface or peripheral speed of the drill in feet per minute, and is rated at the outer diameter. Under average conditions, the

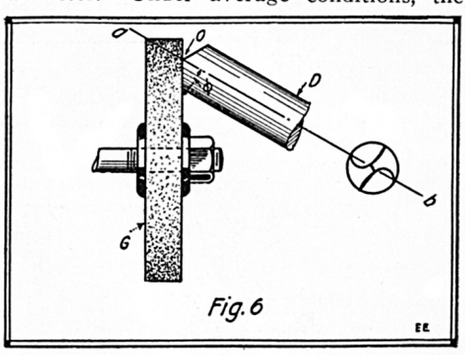

In Grinding or Sharpening Twist Drills by Hand, Care Should Be Exercised to Keep the Drill Axis At An Angle of 60 Degrees with the Grinding Plane.

peripheral speed recommended for carbon steel drills is thirty to forty feet, and for high-speed drills, seventy to one hundred feet. Working conditions may at times cause a change in these figures. When the extreme outer corners of the cutting edges wear rapidly, it is evidence of too high a surface speed.

In order to grind a drill by hand, it is necessary that the axis of the drill be within 60 degrees of the grinding plane. This can be more clearly understood by referring to Fig. 6, where G is the grinding plane or grindstone, and a-b is the axis of the drill, D, to be ground. The cutting side of the drill should be kept at the required angle, $\Phi = 60$ degrees, with the grindstone surface. If now a revolving movement is made around the axis of its length toward the drill, a straight circular cone will be ground by the grinding wheel at the top, the axis of which coincides with D. If the drill is so ground that the following will be true, the drill will then perform its proper function, namely; that all the cutting lips have the same inclination to the axis of the drill; secondly, that the cutting lips be of exactly equal length; thirdly, a proper lip clearance of the surface back of the cutting edge; fourth, a proper angle of lip clearance.

In order to maintain high cutting speeds, it is necessary to use a lubricant. Those recommended below have stood the test of service.

For hard and refractory steel: Turpentine, kerosene or soda water.

Soft steel and wrought iron drilling: Lard oil or soda water.

Brass cutting: Paraffin oil.

For aluminum: Turpentine, kerosene or soda water.

Cast-iron work: Usually worked dry.

(*Continued on page* 163)

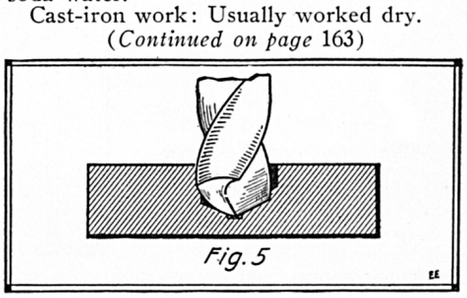

Another Result of Unequal Grinding of a Twist Drill—and a Very Common Fault Too. The Lips Are of Unequal Lengths.

HOW-TO-MAKE-IT

This department will award the following monthly prizes: First Prize, $3.00; Second Prize, $2.00; Third Prize, $1.00.
The purpose of this department is to stimulate experimenters towards accomplishing new things with old apparatus or old material, and for the most useful, practical and original idea submitted to the Editors of this department, a monthly series of prizes will be awarded. For the best idea submitted a prize of $3.00 is awarded; for the second best idea a $2.00 prize, and for the third best prize of $1.00. The article need not be very elaborate, and rough sketches are sufficient. We will make the mechanical drawings. Use only one side of sheet. Make sketches on separate sheets.

FIRST PRIZE, $3.00

TELEPHONE TRANSMITTER SENSITIVE AS A DICTAPHONE

A very simple, but wonderfully sensitive telephone transmitter for experimental purposes can easily be made. As shown in the

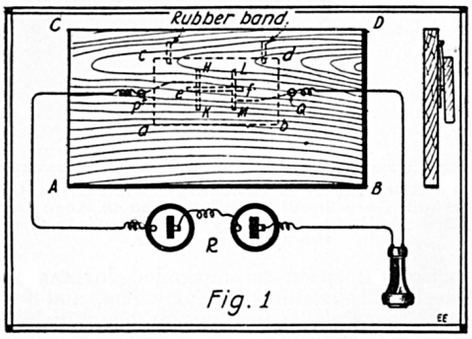

Here, ABCD = Piece of Soft Wood 5 x 3 x ¼ Inches Resting on Wooden Base. abcd = Wooden "Mouthpiece" Hanging on Back of Larger Piece and Carrying a Short Carbon Rod, ef. HK and LM = Carbon Rods Attached to the Larger Piece of Wood. Wires Lead from HK and LM Thru the Posts p and q and Two Dry Cells at R to the Standard 75 Ohm Telephone Receiver.

diagram Fig. 1, it consists of a small piece of thin board mounted on a wooden base and having two vertical carbons about 3/16 of an inch in diameter, attached by claw tacks to the back. Hanging over them is a small, thin piece of light, soft wood carrying a transverse carbon, which lightly touches the vertical ones. This constitutes the "mouthpiece." To the vertical carbons wires are attached which run through the board and connect with two dry cells and a telephone receiver. The transverse carbon resting against the vertical carbons makes a bad contact in the circuit, and the sound vibrations striking upon the *mouthpiece* produce an alternate increase and decrease in pressure, which varies the electrical resistance and current in the circuit.

To secure greater sensitiveness a small induction coil may be mounted on the front, as shown in the second diagram, Fig. 2. A few turns of No. 22 copper wire are used on the primary, and a large number of turns of No. 36 wire on the secondary. With the induction coil inserted the human voice in ordinary conversation, six feet from the transmitter, is easily heard thru the receiver, which may be placed at any distance.

Contributed by FLOYD L. DARROW.

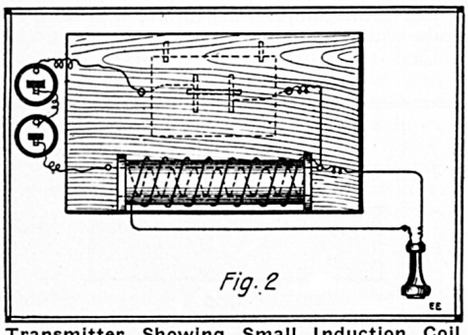

Transmitter Showing Small Induction Coil Mounted on the Front of the Board. The "Mouthpiece" Is in Series with the Primary Winding.

SECOND PRIZE, $2.00

CONTROLLING DISTANT LIGHT WITH A MAGNET.

It is often convenient to have a light at the head of the stairs so connected that it may be turned on at the bottom as you go up, and turned off when you reach the top, or vice versa. But it is not always practicable or desirable to have the old wiring taken out and new installed, for this purpose. The same results can be obtained by the use of the scheme herein shown.

A common pull chain socket is used with a thread attached to the end of the chain and to the top of the solenoid core, or the chain may be fastened direct to the core for that matter. The rest of the drawing requires no explanation.

One push can be at the top of the stairs and one at the bottom, and as many others at different places as the experimenter desires. One push of the button turns the light on and another turns it off.

Contributed by

SCOTT EUGENE VANCE.

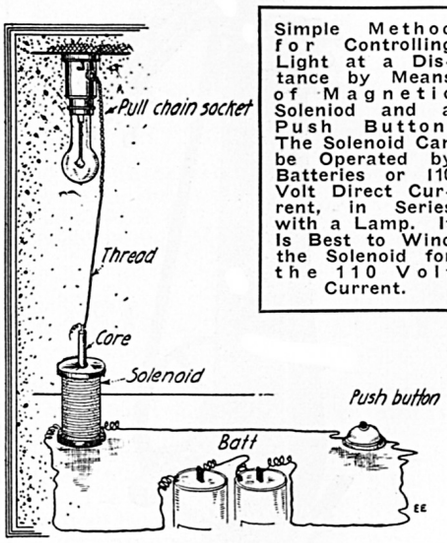

Simple Method for Controlling Light at a Distance by Means of Magnetic Solenoid and a Push Button. The Solenoid Can be Operated by Batteries or 110 Volt Direct Current, in Series with a Lamp. It Is Best to Wind the Solenoid for the 110 Volt Current.

MAGNETIZED SCREW-DRIVER A HANDY DEVICE.

I magnetized a screw-driver by holding it close to a dynamo for a few minutes, nearly two years ago, and it is still my most valued helper when it is necessary for me to do repair work on my car. It is a great help when working around the car to have this magnetized screw-driver to pick up screws and small pieces of the machinery which drop down inside, out of my reach.

In setting screws it is invaluable; simply pick up the screw by touching the head with the magnetized screw-driver, and it may be instantly set in place with only one hand. It does away entirely with the annoyance of the screw slipping away and getting lost, as it so often does. I always carry it in the tool box, and find the other fellow appreciates it when I find him having car-troubles on some lonely bit of road.

Contributed by ETHEL WEBB.

THIRD PRIZE, $1.00

A QUICKLY CONSTRUCTED "PHONE CONNECTOR."

An efficient and handy "Phone Connector" can be made in a few minutes, as follows:

Obtain a spring clothes-pin; bore a hole

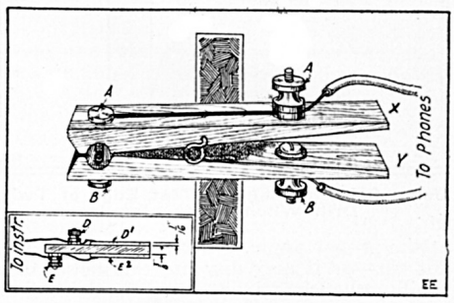

A Handy, Simple and Efficient 'Phone Connecting Clip. The Clip Is Clamped, on a Strip of Fiber, Lined on Either Side with Brass Strips as Shown.

thru head where line usually goes, put a battery binding post thru each hole, so that the nut will be on the outside. Then bore two other holes one inch from the opposite end and put two more posts in. Connect the two posts on each side A to A and B to B as indicated.

Next obtain a piece of wood 2" x ⅜" x the width of the clothes-pin; attach two strips of copper ¾" x 1/16" x ⅜" to each side. Mount two binding posts on the opposite side as D and E, then solder wire (or connect in some way) the binding posts E to plate E^2 and D to D^1. Connect D and E with the instruments and A and B with the 'phones, and pressing X and Y together, place on stationary contact blocks so as to make connection in the manner apparent.

Contributed by JOHN W. HOPKINS.

A TIE-CLASP TELEGRAPH KEY.

The telegraph key here shown costs one-tenth as much as one purchased in any store, and is smaller, neater, and just as efficient. It consists of a tie-clasp having a strip of brass, with a hard rubber knob soldered or riveted to it. The whole is then mounted on a base 3½ x 2 inches, with binding posts taken from old batteries. The illustration herewith explains fully.

Contributed by HARRY E. FUCHS.

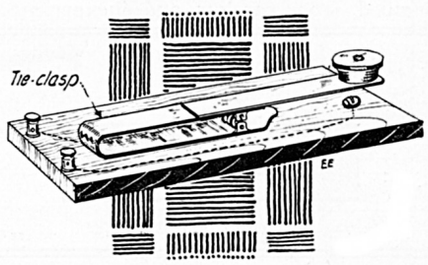

A Masterpiece! Cheap Telegraph Signaling Key Made from Tie Clasp Mounted on Wooden Base. A Brass Screw Serves as the Contact Under the Key Lever.

Connecting Up Dry Cells

By Frederick Von Lichtenow

NEARLY every experimenter who employs Dry Cells or other batteries as the main source of his current supply, keeps these cells, generally speaking, all neatly connected up—often in a dustproof container at that—always ready for the biggest job in his laboratory, for instance his "Spark-Coil" or "Tesla Set."

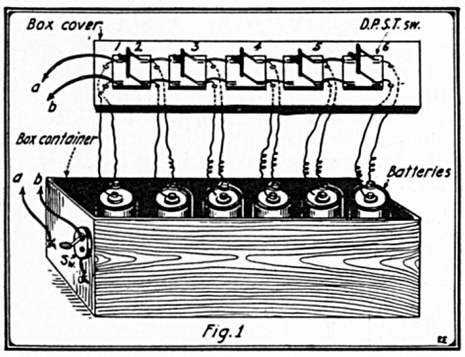

A Neat and Effective Battery-Control Switch-Board for Connecting into Circuit Any Number of Cells, from One to Six, on Parallel.

Whenever lesser pieces of apparata, such as a small motor, an electro-magnet, a buzzer, etc., etc., are to be worked, requiring only one or two dry cells, as the case may be, then these cells have to be separated from the rest of the "family", only to be put back and connected up again when the experiment is finished.

This constant disconnecting and connecting is nothing less than a genuine nuisance and does not tend to improve the condition of the connecting links, whatever they are.

There appear now and then in the technical periodicals schemes, embodying some form of a rotary multi-point switch which are intended to remedy this trouble. To a large extent they are successful in this, but everyone of those, which have come under my observation, was suffering from two other faults, which are nearly as bad as the one above cited: First, the cells were connected up in such a manner that, with only one cell switched-in, this cell was already using energy from the next following one; and this in repetition thru the whole row. Second, as a consequence of the first fault it is impossible to properly test each cell individually without going thru the disconnecting stunt again.

The scheme treated in this article has none of these drawbacks and is the cheapest and simplest one could think of; nothing, so to speak, has to be constructed and the few necessary finished parts are obtainable anywhere at a very slight expense.

As will be seen from the illustrations, this idea of connecting cells lends itself very well to both battery-box and switch-board, whichever one prefers. The cells are arranged as if intended to be connected up in "parallel", which is clearly shown in Fig. 1. Six cells require five (small sizes) D.P.S.T.-Switches, (of which switch No. 1 serves two dry cells) with an additional circuit switch on the one side of the container. There are two binding posts brought out on the same side—one directly connected, the other to the circuit switch, as is self-evident—for the connection of apparatus.

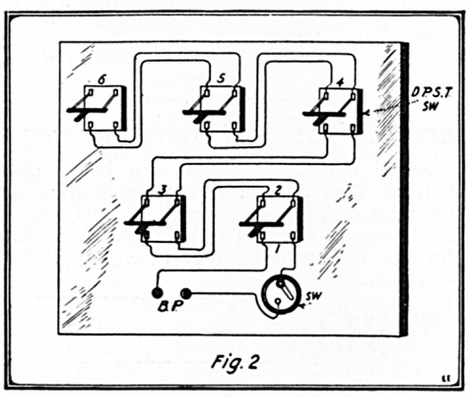

Another Style of Battery Switchboard for Connecting up Any Desired Number of Cells on Parallel.

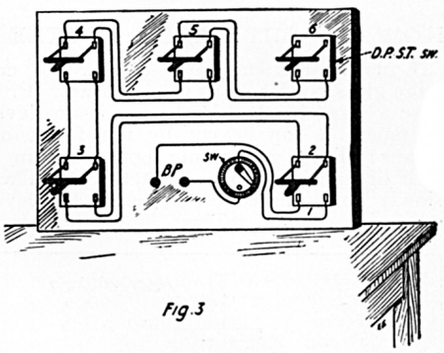

In this Design of Battery Switchboard the Leads from the Cells Are Brought into the Switches from the back of the Panel.

The diagrams in Figs. 2 and 3 suggest two different ways of connecting the switches, etc., upon boards, with the battery wires running in from the back (not shown in sketches) and connected to their proper places, which are marked by figures, each representing one cell.

No doubt, there are several ways of eliminating those many switches without disturbing the above arrangement in the least, such as by using taps, switch-points, contact bushings in conjunction with sliding blades or rods, respectively, and other necessary parts, but these have in most cases, to be ordered, if obtainable at all, or made to order in some shop, which involves loss of time and often a respectable amount of money.

The scheme, as it is illustrated and described here, will, after all, be found to be the quickest, simplest and least expensive way of "getting there."

D. C. Dynamo from Magneto

Here is a dynamo-motor that any experimenter can make at practically no cost except a little patience and work. All the material can be purchased for a small sum. The material required are a telephone magneto and two telephone transformer coils, or about ¼ lb. No. 22 magnet wire. Also some pieces of brass, a brass tube, and some fiber and mica. Now, with all the material at hand, remove the two gear wheels on the magneto and take off the contact parts on the other end. The magneto now appears as in Fig. 1. Then take one end plate M off and drill a ¼-inch hole each side of the bearing at cc, midway between the bearing and edge of plate. Next cut two pieces of brass or copper of shape shown at N, Fig. 2. They measure about 1¼ inch. Drill a ¼-inch hole at c in each and solder a piece of spring brass A to the other end at X. Then bend into a right angle at B. These are the brushes, and they fasten to M thru cc with two battery binding posts, which are carefully insulated from the plate M.

Remove the armature of the magneto and cut away the fine wire wound thereon. Next take off about ten of the segments or laminations H, to make room for the commutator. The commutator C is made from a piece of brass tubing ½ inch long, which is slightly larger than the shaft. Now cut the tube in two halves lengthwise, being careful not to bend it. Take a piece of mica and wrap it around the shaft at L until it just fits the brass segments K.

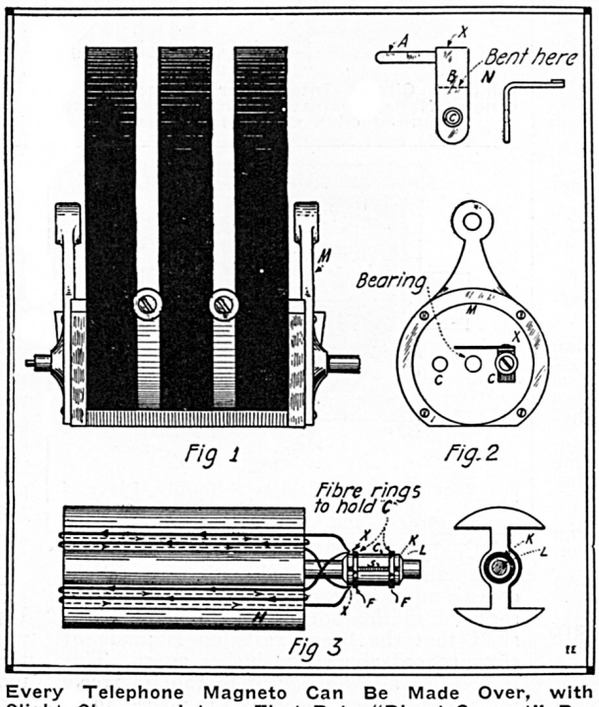

Every Telephone Magneto Can Be Made Over, with Slight Changes, into a First-Rate "Direct-Current" Dynamo. Fine for Auto or Boat Lighting and Experimental Work.

Shellac the mica to the shaft, and then shellac the segments over the mica, taking care to leave a slot S between the segments on both sides. Two short pieces of fiber tubing (rings) F, F, are then slipped tightly over C. A tight fit is necessary. These rings hold the brass pieces C securely. A word of caution here: *Place the slot S just past center as shown.* Then tie securely and put away to dry. When dry wind the armature as tightly as possible with the magnet wire in the manner indicated by arrows. Wind an equal number of turns on each side of the shaft and solder the ends to the segments of the commutator at xx. The diagram shows plainly these operations. When completed, give the windings two coats of shellac and let dry. After it is thoroly dry, place a fiber washer on each end of the shaft and assemble as originally found. Place a small pulley on the end of the shaft that protrudes and all is complete. If directions have been closely followed a nice little machine will result. *It will run either as a dynamo or motor.* As a dynamo I was able to light 4 to 5 small tungsten lamps. On 4 to 6 volts it develops remarkable power. When running as a motor it works better with one of the magnets removed, as this lessens the strength of field so that the armature revolves more freely.

Contributed by W. E. LEACH.

HOW TO CUT LARGE BOTTLES.

I herewith submit a novel way to cut large glass bottles so as to make jars. Procure a large bottle. If the top is not level or tapers it can be cut by the following means: Pour water into bottle within 1 inch of line where you want to cut. Then slowly pour linseed oil in up to the level of proposed cut. Then a red-hot iron

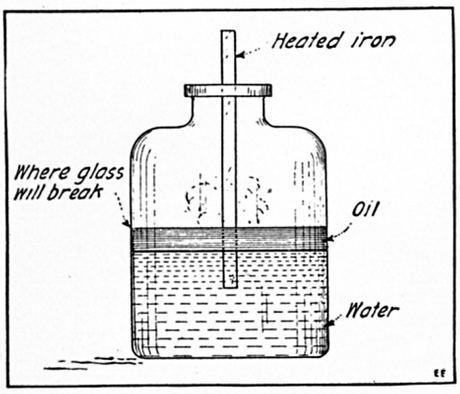

A Simple Way to Cut Off Large Glass Bottles, by Plunging a Red-Hot Iron Into an Oil and Water Solution Filling the Bottle Up to the Line Where the Cut Is to Be Made.

plunged vertically into the oil will cause the glass to crack at the level of the liquid and leave an open top jar.

Contributed by GERRAL EHINGER.

USEFUL LABORATORY INFORMATION.

Rain water may be used as distilled water, provided it is clean.

Baking soda is sodium bicarbonate.

Vinegar contains dilute acetic acid.

Common table salt is sodium chlorid.

Rust from a nail or other iron is ferric oxid.

Tea contains tannic acid.

Blackboard chalk is calcium carbonat.

Epsom salts is magnesium sulfate.

Sugar of lead is lead acetat.

Aqua fortis is nitric acid.

Aqua-regia is a mixture of nitric and hydrochloric acids.

Sal ammoniac is ammonium chlorid.

Sal soda is sodium carbonat.

"Hypo" is sodium thiosulfate.

Denatured alcohol is principally a mixture of wood and grain alcohol.

A porcelain mortar or pestal makes an excellent whet-stone.

Aqua ammonia is ammonium hydroxid.

"Lye" or caustic soda is sodium hydroxid.

Quicklime is calcium oxid; slacked lime is calcium hydroxid.

German silver contains no silver.

Freshly prepared ferric hydroxid is an antidote for arsenic poisoning.

The glue on postage stamps is dextrin.

Quartz is silicon dioxid.

The ruby, saffire and others gems are composed mainly of aluminum oxid.

Borax is sodium borat.

Salt-petre is potassium nitrat.

Copperas is ferrous (iron) sulfate.

Blue-stone is copper sulfate.

Hydrochloric acid and ammonium hydroxid are solutions of a gas in water.

Oxygen is made by heating potassium chlorat with manganese dioxid.

Carbon dioxid is prepared by treating marble chips with strong acid.

Hydrogen is prepared by treating zinc with strong acid.

Chlorin is easily prepared by heating a mixture of hydrochloric acid and manganese dioxid.

Sulfur dioxid is made by burning sulfur in air.

Nitrogen may be prepared by heating ammonium nitrit.

Pure silver may be prepared by treating silver nitrat with copper.

The silver is deposited as a gray powder, and may be collected by fusing into a solid.

Contributed by
ARTHUR SILVERBERG.

SIMPLE CIRCUIT INTERRUPTER.

Small nails are driven in a board one-half an inch apart and connected together by wire. A crank pivoted in the center has a spring brass strip soldered to it. On turning the crank fast or slow, the circuit is interrupted.

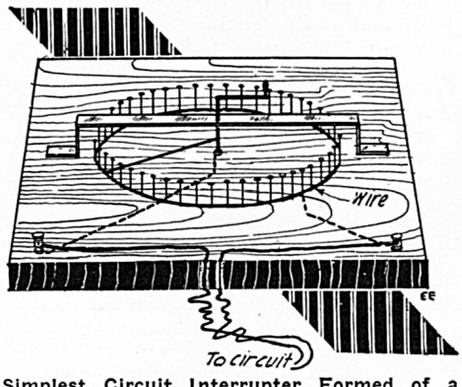

Simplest Circuit Interrupter Formed of a Ring of Nails, Against Which a Brass Spring Mounted on a Crank Is Turned.



An Electric Bread Raiser—Simply Place a 32 C. P. Incandescent Lamp Under the Pan of Bread and Watch the Results.

ELECTRIC BREAD RAISER:—A box of suitable size is fitted with an air tight cover and a 32 candle-power carbon lamp screwed in the bottom of the box. The shelf that the bread rests on is made of slats, spaced about two inches apart. This is done to allow the heat to radiate freely in the box, when the bread is placed in it. The method has worked out well.

Contributed by RICHARD ANDRESS.

EXPLOSIVE GAS APPARATUS.

Having occasion to make hydrogen gas to explode in a gas cannon, I thought of the following idea: I secured an old show-case bulb and broke the tip off. After removing the filament (B), I fused a piece of glass tubing on the bulb, as shown at (A). Then I filled the bulb half full of a

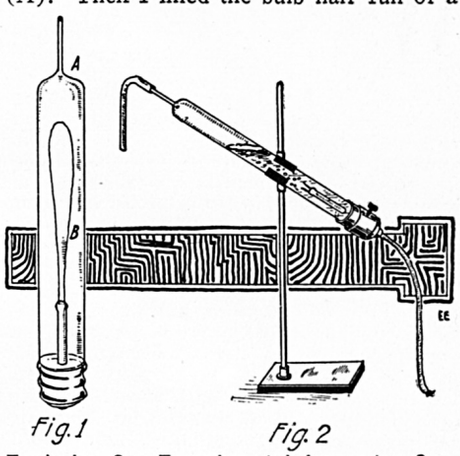

Explosive Gas Experimental Apparatus Constructed of Show-case Lamp with Tube Fused on Tip End.

sulfuric acid solution, screwed it in a socket, and clamped the whole on the stand, as in Fig. 2. By running a piece of rubber tubing from the tube to the cannon, I was able to get a good explosion. Care must be taken not to disturb the platinum terminals.

Contributed by
N. KENNETH MEHAFFIE.

SILVER PLATING WITHOUT A BATTERY.

Dissolve about an ounce of silver in two ounces of nitric acid. After the silver is all dissolved throw into it a pint of water and four ounces of common salt. The salt will precipitate a powder which is pure silver. Filter off the water, or if there is no filter paper handy, pour off the water and repeat until all the effects of the salt have disappeared. To this white powder add two ounces of cyanide of potassium* and three ounces of hyposulphate of soda. Now add to all this two quarts of pure rain water and the silver mixture is complete.

The plating is done in the following manner. Hang the article to be plated in the solution at the end of a strip of lead or if more convenient, immerse the article in the solution and boil it for ten or twenty minutes, according to the thickness of the silvering desired. To obtain best results the articles to be plated must be free from grease and oil or dirt.

*** This chemical is a deadly poison and must be handled with the most care.**

Contributed by DAVID GOODMAN.

IMITATION GOLD.

Take 16 parts of platina, 7 parts copper, 1 part zinc, put in covered crucible, with powdered charcoal and melt together till the whole forms one mass and all are thoroly incorporated. Or take 4 oz. platina, 3 oz. silver and 1 oz. copper.

Contributed by
NORMAN LIVINGSTON.

The RADIO LEAGUE of AMERICA

HONORARY MEMBERS
CAPT. W.H.G. BULLARD, U.S.N. NIKOLA TESLA.
PROF. REGINALD FESSENDEN. DR. LEE DE FOREST.

Manager, H Gernsback

Amateur Radio Restored

By H. GERNSBACK

WINNING one war seems like a great accomplishment, but winning two wars, one after the other, is a historic occurrence for which we have few counterparts.

When on Nov. 11 the glad news came that the great war had been won, the world once more breathed freely, and so did the American Radio Amateur, who had done his "bit" in bringing the war to a successful termination. But hardly was the armistice signed than the spectre of a new war—to the amateur—crept up over the horizon threatening to take away from him the freedom for which we had fought.

A nation may be opprest by a relentless foe if conquered, or it may be opprest in a similar manner by unjust laws which curtail the freedom of its people. Indeed, when it was proposed last winter to take away from the American Radio Amateur the freedom of the ether, which would have deprived the liberties of over 300,000 young men in this country, war was declared once more. This war was to the knife; it was as short as it was decisive. But Right as usual won over Might, and the American Radio Amateur won *his* war, as the Allies won theirs.

And, as the Allies will win the fruits of their victory in the months to come, so will the amateurs reap the fruit of their victory. Indeed, the reaping has already begun. On April 15th the ban on Radio, at least for *receiving*, was officially taken off, and a mighty shout went up when Radio Amateurs were again permitted to use the ether to their hearts' content. Altho the ban for *sending* has not been removed at this time of writing, the chances are that before the next issue is in your hands the freedom of the ether will be once more restored completely.

As soon as the newspapers published the welcome tidings on April 15th that the ban on receiving was off, hundreds of thousands of amateurs began dusting off their sets and aërials blossomed forth over night by the thousands to resume their former activities once more.

And wonders upon wonders! When we put our sets away two years ago we were accustomed to hear nothing but the crisp dots and dashes in flute-like, staccato sounds coming from the high power stations which we all had learned to love. But the war has changed everything—even radio, for now the *radio telephone* has come into its own.

Where formerly there was nothing but the *tah-de-dah* in our phones, the ether is now filled with the human voice flung far and broad over the land—nay, over the oceans—and as the months roll by the dots and dashes will grow less and less, and the human voice will come in over our aërials more and more, which is as it should be.

The writer has always contended that wireless telephony was the logical outcome of radio, and in years to come only the commercial high power stations will operate their dots and dashes with their high speed machines where the voice would not be as reliable. But the future of Radio Amateurism in this country is centered upon the radio telephone. While no doubt many of us will still cling to the dots and dashes, the radio telephone will probably soon be used in overwhelming numbers.

What a wonderful world it will be in one or two years hence! You will step out into the star-lit night and myriads of voices—noiselessly and invisibly—will fill the air all over the continent, flung thru the ether. You will hear nothing and you will see nothing. When you sit on the seashore gazing fascinated at the beauty of the tides, as they follow the moon, all the while the invisible and soundless voices will be all around you—nay, even pass thru your very body. But when you step in the humble little amateur radio station and clasp a pair of receivers onto your ears, the ether will be unlocked and all of these myriads of voices will be made audible to your ears. A perfect Babel of voices will greet you, but by means of your tuning devices you will be able to pick out the very voice you wish to listen to, tuning out all the others.

It is a glorious thought that we are fortunate enough to live in an age where such things are possible, and we must prove worthy of our new-gained liberty, now certain.

And the writer regrets to say that before the war we did not realize how fortunate we were, and we did not show by our actions that we appreciated the freedom of the ether.

There was constant bickering and quarreling on the side of the amateur, among themselves as well as with commercial and government stations. Profane talk took place not infrequently thru the ether, and many of us annoyed the commercial as well as the government operators by "hogging" the ether. Hence, it was not surprising that the government tried to pass laws to curb the amateurs and curtail their liberties.

If Radio Amateurism is to prevail in the new era, the amateurs must stop their former nonsense and must settle down strictly to business. They can and should receive all they want to their hearts' content. They can and will listen very shortly to President Wilson's voice when he speaks to us from the "George Washington," where everybody is free to listen in. Amateurs can listen in to their hearts' delight, whether it be to wireless telephone or wireless telegraph. But when it comes to sending, we must mend our ways. If we do not, laws will be past sooner or later to curtail our entire liberties, and here the writer desires to make an important suggestion.

There are now a good many Radio Clubs and Associations all over the country. We cannot have too many. The suggestion is that every club and every association should appoint one or a number of expert amateurs to listen in nightly to messages that are violating the common rules, either by profane language, by "hogging" the ether, by Q. R. M. or by wilful interference. The offender should be sought out and promptly warned, and should he repeat his offense a second time, **he should be promptly reported to the Radio Inspector of the district, and the various publications catering to the amateurs should be notified.** A sworn statement relating the offense should be submitted to the publications, who will pledge themselves to publish the name of the offender.

The ELECTRICAL EXPERIMENTER, for one, will be glad to publish such names regularly, and it is believed that such measures will do more than anything else to increase the prestige of radio amateurism in the United States, and take it out of the school-boy class. There is little doubt that if we follow such procedures Radio Amateurism in the United States will become one of the great institutions of this country. We must show the world that we amateurs are serious-minded and do not use one of the greatest inventions for a

(*Continued on page* 174)

NAVY DEPARTMENT
Naval Communication Service
Office of the Director.
Washington, April 14, 1919.

Editor Electrical Experimenter
Sir:

The Acting Secretary of the Navy authorizes the announcement that effective April 15, 1919, all restrictions are removed on the use of radio receiving stations other than those used for the reception of commercial radio traffic. This applies to amateur stations, technical and experimental stations at schools and colleges, receiving stations maintained by jewelers or others desirous of receiving time signals, receiving stations maintained by manufacturers of radio apparatus, etc.

The restrictions on transmitting stations of all types are still in effect, as are the restrictions on stations operated regularly for the reception of commercial radio traffic. Both of the above classes of stations will be permitted to resume operation as soon as the President proclaims that a state of peace exists.

Attention is invited to the fact that all licenses for transmitting stations have expired, and that it will be necessary, when peace is declared, for the owners of these stations to apply to the Department of Commerce for new licenses.

Very respectfully,
(Signed) E. B. Woodworth,
Commander, U. S. Navy, Assistant Director Naval Communications.

The Above Is the Text of the Official Notification Restoring the Freedom of the Ether Once More. The Ban on Sending Is as Yet not Lifted. When Peace Is Declared, While Technically the Ban for Sending Will be Off, It Should be Remembered That All Sending Licenses Have Been Cancelled During the War and New Licenses Must Be Secured from the Department of Commerce. Address the Office of the Radio Inspector at the Custom House of Your District for Further Particulars.

The Moon's Rotation

By NIKOLA TESLA

In this article Dr. Tesla proves conclusively by theory and experiment that all the kinetic energy of a rotating mass is purely translational and that the moon contains absolutely no rotational energy, in other words, does not rotate on its axis.—EDITOR.

IN revising my article on "The Moon's Rotation", which appeared in the April issue of the ELECTRICAL EXPERIMENTER, I appended a few remarks to the original text in further support and eluci-

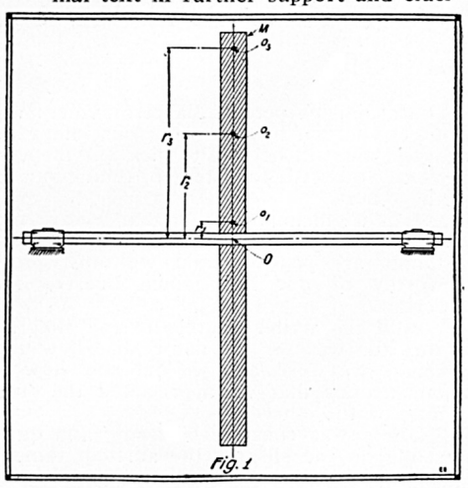

Fig. 1. In Determining the Kinetic Energy of a Rotating Mass, This Figure Shows the Selection of a Number of Points Taken Within the Straight Rod or Mass M, at Successive Distances from the Axis of Rotation O, Knowing These Values and the Speed of Rotation the Kinetic Energy of the Mass Is Readily Computed.

dation of the theory advanced. Due to the printer's error these were lost and, in consequence, I found it necessary to forward another communication which, unfortunately, was received too late for embodiment in the May number. Meanwhile many letters have reached me in which certain phenomena presented by rotating bodies, as the moon's librations of longitude, are cited as evidences of energy due to spinning motion, i. e., proofs of axial rotation of the satellite in the true physical sense. I trust that the following amplified statement will meet all of the objections raised and convert to my views those who are still unconvinced.

The kinetic energy of a rotating mass can be determined in four ways which are illustrated in diagrams, Figs. 1, 2, 3 and 4 and may be found more or less suitable.

Referring to Fig. 1, the method consists in selecting judiciously a number of points as o_1, o_2, o_3, etc., within the straight rod or mass M, respectively at distances r_1, r_2, r_3, etc., from the axis of rotation 0 and calculating the square root of the mean square of these distances. Its value being R_g, denoted radius of gyration, the *effective* velocity of the mass at n revolutions per second will be $V_e = 2\pi R_g n$ and its kinetic energy $E = \frac{1}{2} M V_e^2 = \frac{1}{2} M (2\pi R_g n)^2$.

In Fig. 2 the mass M, rotating n times per second about an axis 0 at right angles to the plane of the paper, is divided into numerous elements or small parts, most conveniently very thin concentric laminae, as l_1, l_2, l_3, etc., at distances r_1, r_2, r_3, etc., from 0. Since the kinetic energy of each part is equal to half the product of its mass and the square of the velocity, the sum of all these elemental energies $E = \frac{1}{2} \Sigma m V^2 = \frac{1}{2} m_1 V_1^2 + \frac{1}{2} m_2 V_2^2 + \frac{1}{2} m_3 V_3^2 + \ldots\ldots = \frac{1}{2} m_1 (2\pi r_1 n)^2 + \frac{1}{2} m_2 (2\pi r_2 n)^2 + \frac{1}{2} m_3 (2\pi r_3 n)^2 + \ldots\ldots$.

A different form of expression for the energy of a rotating body may be obtained by determining its moment of inertia. For this purpose the mass M (in Fig. 3), rotating n times per second about an axis 0, is separated into minute parts, as m_1, m_2, m_3, etc., respectively at distances r_1, r_2, r_3, etc., from the same. The sum of the products of all these small masses and the squares of their distances is the moment of inertia I, and then $E = \frac{1}{2} I \omega^2$, $\omega = 2\pi n$ being the angular velocity.

It is obvious that in all these instances many points or elements will be required for great accuracy but, as a rule, very few are sufficient in practice.

Still another way to compute the kinetic energy is illustrated in Fig. 4, in which case the quantity I is given in terms of the moment of inertia I_c about another axis parallel to 0 and passing thru the center of gravity C of mass M. In conformity with this the energy of motion $E = \frac{1}{2} M V^2 + \frac{1}{2} I_c \omega^2$ in which equation V is the velocity of the center of gravity.

The preceding is deemed indispensable as I note that the correspondents, even those who seem thoroly familiar with mechanical principles, fail to make a distinction between theoretical and physical truths which is essential to my argument.

In estimating the kinetic energy of a rotating mass in any of the ways indicated we arrive, thru suitable conceptions and methods of approximation, at expressions which may be made quantitatively precise to any desired degree, but do not truly de-

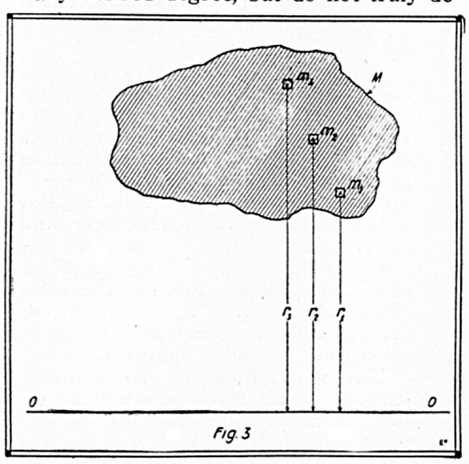

Fig. 3. Another Form of Expression for the Energy of a Rotating Body May Be Obtained by Determining Its Moment of Inertia. Here the Mass M is Subdivided Into Minute Parts m_1, m_2, m_3, ... etc. The Sum of the Products of These Masses and the Squares of Their Distances Is the Moment of Inertia, Which with the Angular Speed, Gives the Kinetic Energy E.

fine the actual condition of the body. To illustrate, when proceeding according to the plan of Fig. 1, we find a certain hypothetical velocity with which the entire mass should

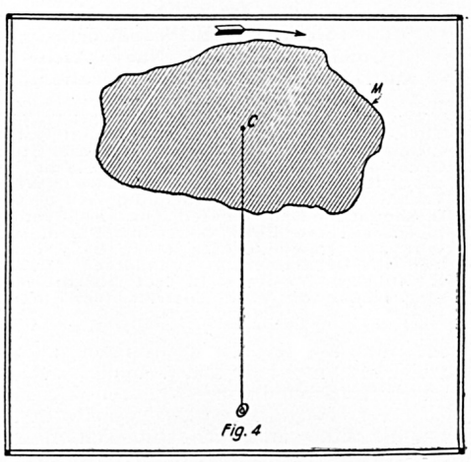

Fig. 4. In this Case the Motion is Resolved Into Two Separate Components—One Translational About O and the Other Rotational About C. The Total Kinetic Energy of the Mass Equals the Sum of These Two Energies.

move in order to contain the same energy, a state wholly imaginary and irreconcilable with the actual. Only, when *all* particles of the body have the same velocity, does the

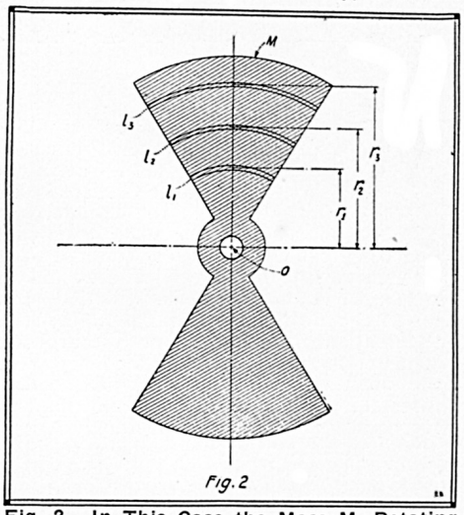

Fig. 2. In This Case the Mass M, Rotating n Times Per Second, About An Axis O, Is Divided Into Numerous Elements or Small Parts at Various Radii from O. Knowing the Kinetic Energy of Each Part, the Whole Kinetic Energy of the Mass Is Easily Determined by Taking a Summation of the Individual Quantities.

product $\frac{1}{2} M V^2$ specify a physical fact and is numerically and descriptively accurate. Still more remote from palpable truth is the equation of motion obtained in the manner indicated in Fig. 4, in which the first term represents the kinetic energy of translation of the body as a whole and the second that of its axial rotation. The former would demand a movement of the mass in a definite path and direction, all particles having the same velocity, the latter its simultaneous motion in another path and direction, the particles having different velocities. This abstract idea of angular motion is chiefly responsible for the illusion of the moon's axial rotation, which I shall endeavor to dispel by additional evidences.

With this object attention is called to Fig. 5 showing a system composed of eight balls M, which are carried on spokes S, radiating from a hub H, rotatable around a central axis 0 in bearings supposed to be frictionless. It is an arrangement similar to that before illustrated with the exception that the balls, instead of forming parts of the spokes, are supported in screw pivots *s*, which are normally loose but can be tightened so as to permit both free turning and rigid fixing as may be desired. To facilitate observation the spokes are provided with radial marks and the lower sides of the balls are shaded. Assume, first, that the drawing depicts the state of rest, the balls being rotatable without friction, and let an angular velocity $\omega = 2\pi n$ be imparted to the system in the clockwise direction as indicated by the long solid arrow. Viewing a ball as M, its successive positions 1, 2, 3—8 in space, and also relatively to the spoke, will be just as drawn, and it is evident from an inspection of the diagram that while moving with the angular velocity ω about 0, in the clockwise direction, the ball turns, with respect to its axis, at the same angular velocity but in the opposition direction, that of the dotted arrow. The combined result of these two motions is a translatory movement of the ball such that all particles are animated with the same velocity V, which is that of its center of gravity. In this case, granted that there is absolutely no friction the

kinetic energy of each ball will be given by the product of ½ M V² not approximately, but with mathematical rigor. If now the pivots are screwed tight and the balls fixt rigidly to the spokes, this angular motion relatively to their axes becomes physically impossible and then it is found that the kinetic energy of each ball is increased, the increment being exactly the energy of rotation of the ball on its axis. This fact, which is borne out both by theory and experiment, is the foundation of the general notion that a gyrating body—in this instance ball M—presenting always the same face towards the center of motion, *actually* rotates upon its axis in the same sense, as indicated by the short full arrow. *But it does not tho to the eye it seems so.* The fallacy will become manifest on further inquiry.

To begin with, observe that when a mass, say the armature of an electric motor, rotating with the angular velocity ω, is reversed, its speed is $-\omega$ and the difference $\omega - (-\omega) = 2\omega$. Now, in fixing the ball to the spoke, the change of angular velocity is only ω; therefore, an additional velocity ω would have to be imparted to it in order to cause a clockwise rotation of the ball on its axis in the true significance of the word. The kinetic energy would then be equal to the sum of the energies of the translatory and axial motions, not merely in the abstract mathematical meaning, but as a physical fact. I am well aware that, according to the prevailing opinion, when the ball is free on the pivots it does not turn on its axis at all and only rotates with the angular velocity of the frame when rigidly attached to the same, but the truth will appear upon a closer examination of this kind of movement.

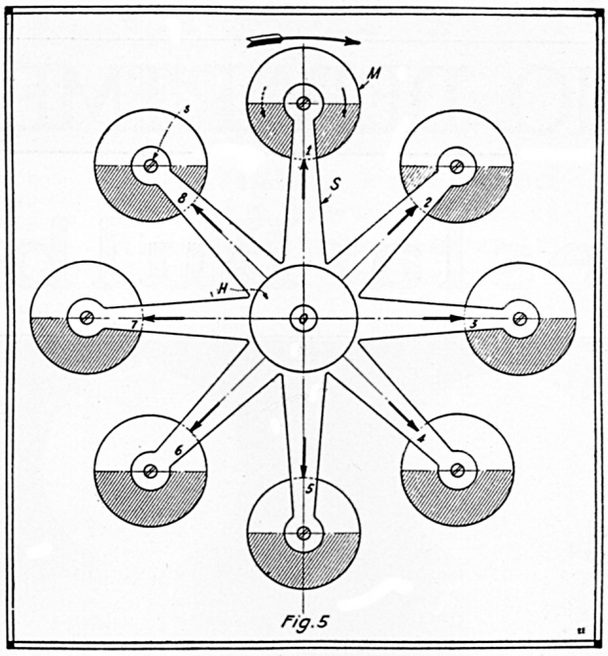

Fig. 5. This Diagram Represents a System Composed of 8 Balls M, Carried on Spokes S, and Rotating Around Center O. The Balls Are Freely Rotatable on Pivots Which Can Be Tightened. With This Model the Fallacy of the Moon's Rotation on Its Axis Is Demonstrable.

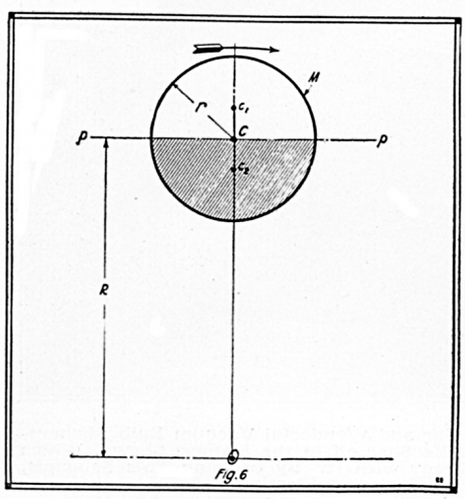

Fig. 6. Diagram Showing a Ball Having Mass M, of Radius r, Rotating About Center O, and Used in the Theoretical Analysis of the Moon's Motion.

Let the system be rotated as first assumed and illustrated, the balls being perfectly free on the pivots, and imagine the latter to be gradually tightened to cause friction slowly reducing and finally preventing the slip. At the outset all particles of each ball have been moving with the speed of its center of gravity, but as the bearing resistance asserts itself more and more the translatory velocity of the particles nearer to the axis 0 will be *diminishing,* while that of the diametrically opposite ones will be *increasing,* until the maxima of these changes are attained when the balls are firmly held. In this operation we have thus deprived those parts of the masses which are nearer to the center of motion, of some kinetic energy of *translation* while adding to the energy of those which are farther and, obviously, the gain was greater than the loss so that the *effective* velocity of each ball as a whole was increased. *Only so* have we augmented the kinetic energy of the system, not by causing *axial rotation* of the balls. The energy E of each of these is *solely* that of translatory movement with an effective velocity V_e as above defined such that $E = \frac{1}{2} M V_e^2$. The axial rotations of the ball in either direction are but apparent; *they have no reality whatever* and call for no mechanical effort. It is merely when an extraneous force acts independently to turn the whirling body on its axis that energy comes into play. Incidentally it should be pointed out that in true axial rotation of a rigid and homogenous mass all symmetrically situated particles contribute equally to the momentum which is not the case here. That there exists not even the slightest tendency to such motion can, however, be readily established.

For this purpose I would refer to Fig. 6 showing a ball M of radius *r,* the center C of which is at a distance R from axis 0 and which is bisected by a tangential plane *pp* as indicated, the lower half sphere being shaded for distinction. The kinetic energy of the ball when whirled *n* times per second about 0 is according to the first form of expression $E = \frac{1}{2} M V_e^2 = \frac{1}{2} M (2\pi R_g n)^2$, M being the mass and R_g the radius of gyration. But, as explained in connection with Fig. 4, we have also $E = \frac{1}{2} M V^2 + \frac{1}{2} I_c \omega^2, V = 2\pi R n$ being the velocity of the center of gravity C and I_c the moment of inertia of the ball, about the parallel axis passing thru C and equal to $\frac{2}{5} M i^2$ so that $E = \frac{1}{2} M (2\pi R n)^2 + \frac{1}{5} M r^2 (2\pi n)^2$. Neither of these two expressions for E describes the actual state of the body but the first is certainly preferable conveying, as it does, the idea of a single motion instead of two, one of which moreover is devoid of existence. I shall first undertake to demonstrate that there is no torque or rotary effort about center C and that the kinetic energy of the supposed axial rotation of the ball is mathematically equal to zero. This makes it necessary to consider the two halves separated by the tangential plane *pp* wholly independent from one another. Let c_1 and c_2 be their centers of gravity, then $Cc_1 = Cc_2 = \frac{3}{8} r$. In order to ascertain the kinetic energy of the hemispheres we have to find their radii of gyration which can be done by determining the moments of inertia Ic_1 and Ic_2 about parallel axes passing thru c_1 and c_2. Complex calculation will be avoided by remembering that the moment of inertia of either one of the half spheres about an axis thru C is $I_C = \frac{1}{2} \times \frac{2}{5} M r^2, = \frac{1}{5} M r^2$, and since $M = 2$ m, $I_C = \frac{2}{5}$ m r^2. This can be expresst in terms of the moments Ic_1 and Ic_2; namely, $I_C = Ic_1 + m (\frac{3}{8} r)^2 = Ic_2 + m (\frac{3}{8} r)^2$. Hence $Ic_1 = Ic_2 = I_C - m (\frac{3}{8} r)^2 = \frac{2}{5} m r^2 - 9/64 m r^2 = 83/320 m r^2$. Following the same rule the moments of inertia of the half spheres about the axis passing thru the center of motion 0 can be found. Designating the moments for the upper and lower halves of the ball, respectively, I_{O1} and I_{O2} we have $I_{O1} = m (R + \frac{3}{8} r)^2 + Ic_1 = m (R + \frac{3}{8} r)^2 + 83/320 m r^2$ and $I_{O2} = m (R - \frac{3}{8} r)^2 + Ic_2 = m (R - \frac{3}{8} r)^2 + 83/320 m r^2$. Thus for the upper half sphere the radius of gyration $R_{g1} =$

$$\sqrt{\frac{I_{O1}}{m}} = \sqrt{(R + \tfrac{3}{8} r)^2 + 83/320\ r^2}$$

and for the lower one $R_{g2} =$

$$\sqrt{\frac{I_{O2}}{m}} = \sqrt{(R - \tfrac{3}{8} r)^2 + 83/320\ r^2}$$

These are the distances from center 0, at which the masses of the half spheres may be concentrated and then the algebraic sum of their energies—which are wholly translatory those of axial rotation being nil—will be exactly equal to the total kinetic energy of the ball as a unit. The

(*Continued on page* 156)

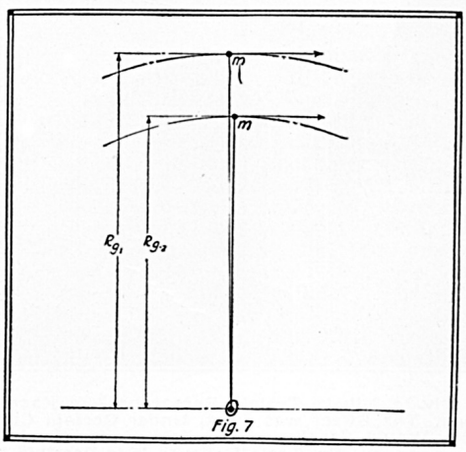

Fig. 7. Here Two Masses m-m, Are Considered as Condensed Into Points, Attached to Weightless Strings of Different Radii. If Both Strings Are Cut, and the Masses Considered as Joined, Then There Will Be No Rotation About the Common Center of Gravity.

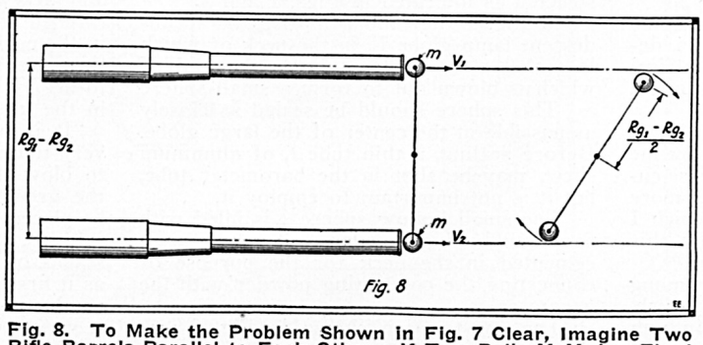

Fig. 8. To Make the Problem Shown in Fig. 7 Clear, Imagine Two Rifle Barrels Parallel to Each Other. If Two Balls M-M Are Fired Simultaneously, Joined by a Theoretical Bond, They Will Revolve About Their Common Center of Gravity, Proving That the Moon Possesses Only Kinetic Energy of Translation.

RADIO DEPARTMENT

Tesla Bulbs

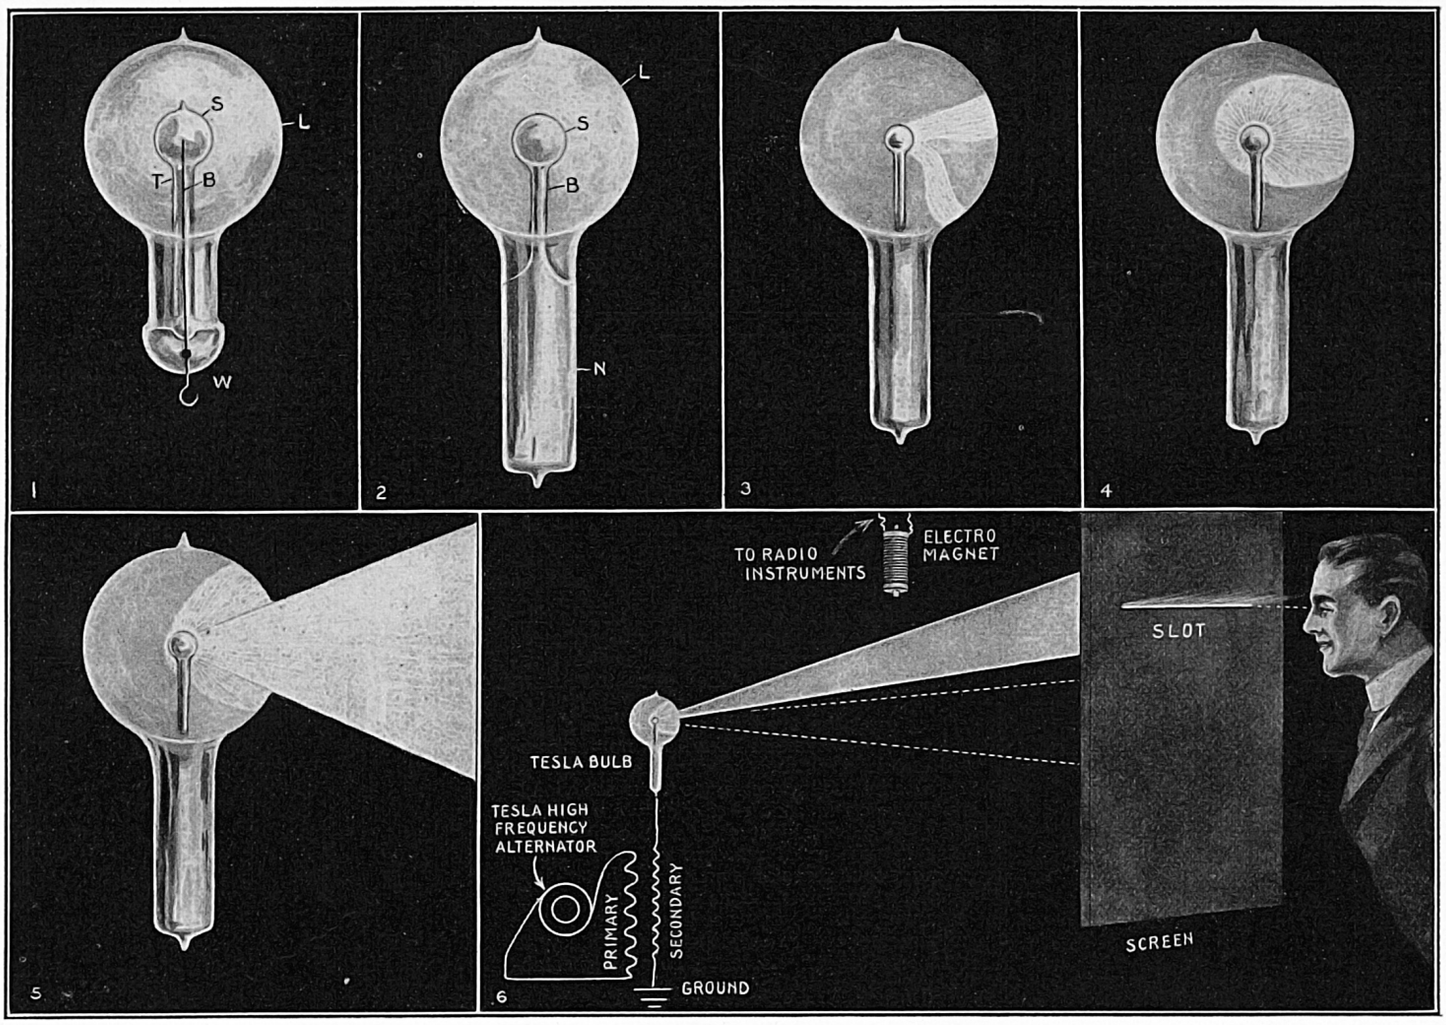

Early in Nikola Tesla's Researches—in Fact as Far Back as 1892—He Discovered a Most Peculiar and Wonderful Vacuum Bulb Phenomena. The Effect was That, Under Certain Critical Conditions, This Bulb Would Cause a Ray to Be Shot off in the Manner Shown, Which Ray Would Revolve or Oscillate Under the Influence of a High-Frequency Current and in Synchrony with It. By Utilizing This Principle, Dr. Tesla Believes It is Possible to Produce a Radio Detector More Sensitive Than the Audion or Fleming Valve.

IN the May issue in his article, "True Wireless," Nikola Tesla mentions the forerunner of the Audion, a Vacuum Bulb, which he used in his earlier experiments.

We have been in receipt of numerous letters from many individuals interested in this bulb who desire further particulars as to its operation, etc.

Accordingly, we publish herewith some excerpts from a lecture by Dr. Tesla delivered before the Institution of Electrical Engineers and Royal Institution, London, February, 1892.

"I think it best at this juncture to bring before you a phenomenon, observed by me some time ago, which to the purely scientific investigator may perhaps appear more interesting than any of the results which I have the privilege to present to you this evening.

"It may be quite properly ranked among the brush phenomena—in fact, it is a brush, formed at, or near, a single terminal in high vacuum.

"In bulbs provided with a conducting terminal, tho it be of aluminum, the brush has but an ephemeral existence, and cannot, unfortunately, be indefinitely preserved in its most sensitive state, even in a bulb devoid of any conducting electrode. In studying the phenomenon, by all means a bulb having no leading-in wire should be used. I have found it best to use bulbs constructed as indicated in Figs. 1 and 2.

"In Fig. 1 the bulb comprises an incandescent lamp globe L, in the neck of which is sealed a barometer tube b, the end of which is blown out to form a small sphere *s*. This sphere should be sealed as closely as possible in the center of the large globe. Before sealing, a thin tube *t*, of aluminum sheet, may be slipt in the barometer tube, but it is not important to employ it.

"The small hollow sphere *s* is filled with some conducting powder, and a wire *w* is cemented in the neck for the purpose of connecting the conducting powder with the generator.

"The construction shown in Fig. 2 was chosen in order to remove from the brush any conducting body which might possibly affect it. The bulb consists in this case of a lamp globe L, which has a neck *n*, provided with a tube *b* and small sphere *s*, sealed to it, so that two entirely independent compartments are formed, as indicated in the drawing. When the bulb is in use the neck *n* is provided with a tinfoil coating, which is connected to the generator and acts inductively upon the moderately rarefied and highly conducting gas inclosed in the neck. From there the current passes thru the tube *b* into the small sphere *s*, to act by induction upon the gas contained in the globe L.

"It is of advantage to make the tube *t* very thick, the hole thru it very small, and to blow the sphere *s* very thin. It is of the greatest importance that the sphere *s* be placed in the center of the globe L.

"Figs. 3, 4, 5, indicate different forms, or stages, of the brush. Fig. 1 shows the brush as it first appears in a bulb provided with a conducting terminal; but, as in such a bulb it very soon disappears—often after a few minutes—I will confine myself to the de-

(*Continued on page* 179)

Alexanderson's "Barrage" Receiver

The Highly Perfected Tuning Device That Riddled the German "Radio Barrage"

E F. W. ALEXANDERSON, consulting engineer and radio expert, related before a large gathering of leading American radio experts, at the April meeting of the Institute of Radio Engineers held in New York City, how Yankee ingenuity overcame German efficiency in the battle to control the air by wireless during the war. As in the fighting on land and sea, the Americans won!

The Germans installed powerful wireless apparatus at strategic points, and blocked communication with a barrage of meaningless messages that interfered with the sending and receiving of important messages. Something had to be done, and when the American Navy unfurled its battle flag in foreign seas it overcame the German interference with the wireless, and so made a remarkable stride in the science of aërial communication.

Mr. Alexanderson was one of the engineers who perfected the barrage receiver, as the device is termed. This invention permits an operator to tune out the powerful messages sent from points near at hand, and pick out of the clashing of radio waves the message sent from greater distances. In a word, he can isolate all messages except the one he desires to hear.

The problem of combating the barrages of senseless messages became serious as the war wore along. It was rather disconcerting to an Allied operator receiving an important message to have something like this break in on him—"Don't eat apple pie on Thursday. Yours till the watch on the Rhine stops. Gott mit Uns," yet it was just such messages that literally flooded the air when the wireless of the Allies was working.

Mr. Alexanderson explained two new devices at this lecture—the first, the "bridge receiver," which permits the speaker in a radiotelephone communication to break in on the second party at any time, and the wonderfully clever radio "barrage receptor."

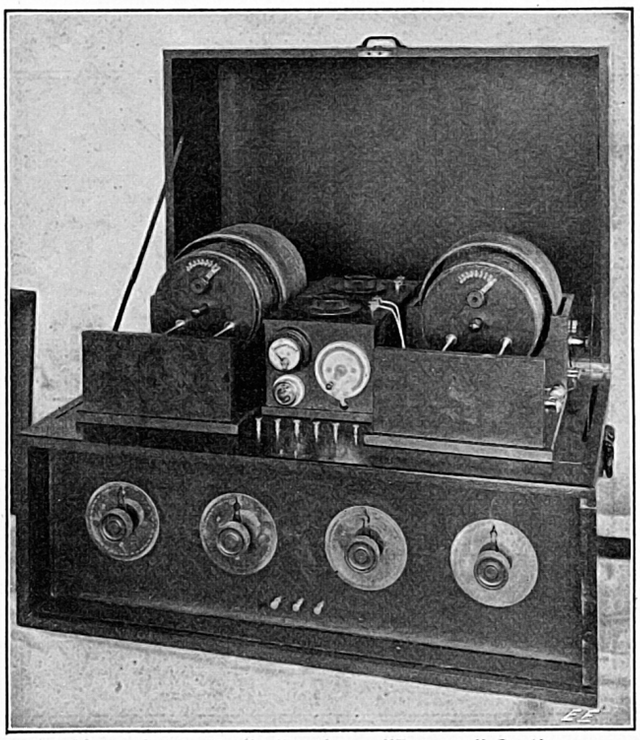

Alexanderson Radio Receiver—"Barrage" Section.

The first invention, the "bridge receptor," gives to wireless telephony the same efficiency as the ordinary telephone. It enables the user to interrupt the person he is talking with without manipulating any apparatus. It will make it possible in the early future for a subscriber to converse with another subscriber in Europe while using the ordinary telephone installed in his home. He also will be able to speak to friends on ships in midocean.

The object of this development was briefly to provide means for neutralizing the overwhelming intensity of the transmitted signal so as to make the receiving set sensitive to the faint impulses of the distant signal. Popularly speaking, the corresponding equivalent in sound waves would be to have an ear which could be so adjusted that a person could stand close to a steam whistle without hearing the whistle, but listen to a person speaking from a distance of a few hundred feet (about a hundred meters). A successful solution of this problem was found as described. This method of reception which is characterized by a static bridge neutralization may be properly classified as the "bridge receiver."

The Barrage Receiver.

During the war the same problem presented itself again in a form which called for a new solution. Distances are only relative, and a steam whistle located in Germany might make such a noise that it would completely drown out both in England and France the sound of the voice calling from America. To find a way to counteract such a continuance was seriously considered by the Inter-Allied conference in February, 1918; and appeals for a solution were conveyed to the author by the French representative in this country, Lieut. Paternot. The solution to this problem, which was adopted by the American as well as the French government after the first demonstration, has become known as the "barrage receiver." This name appears appropriate because the word "barrage" has not only the military mean-

(*Continued on page* 171)

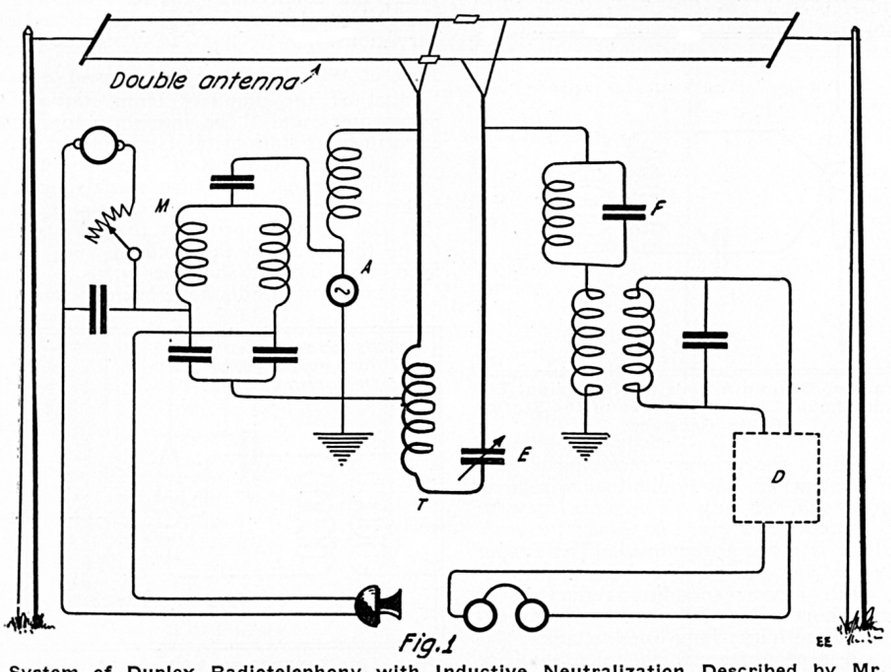

Fig. 1

System of Duplex Radiotelephony with Inductive Neutralization Described by Mr. Alexanderson Before the Institute of Radio Engineers. M—Magnetic Amplifier; A—Alternator; T—Neutralization Transformer; E—Exposure Condenser; F—Frequency Trap; D—Detector.

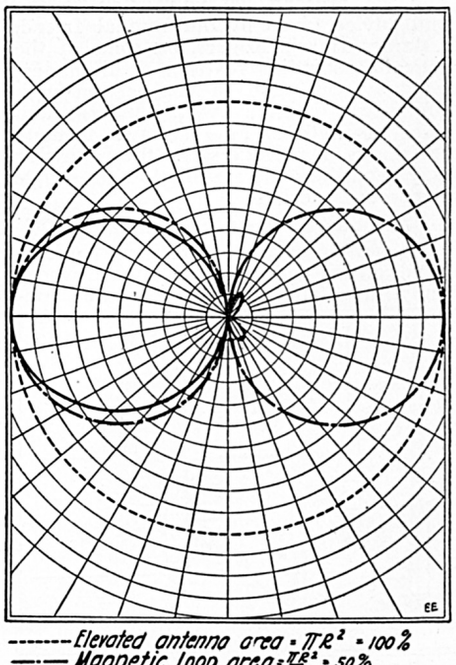

Fig. 3. Relative Directive Reception with Different Types of Receiving Systems.

The Rogers Underground Aërial for Amateurs

Specially Prepared with the Collaboration of Mr. James Harris Rogers

SINCE the publication of the original article on the Rogers Underground Wireless System, published in the March, 1919, issue of the ELECTRICAL EXPERIMENTER, the Editors have been literally besieged by hundreds and thousands of letters from radio experimenters in all parts of the world, asking for data on the construction of *Rogers underground aërials* suited to the requirements of the Wireless Amateur. The original article contained a great deal of valuable data, which should be carefully read and digested by every radio man, whether he be a student or a professional. In the present article an effort has been made to answer some of the questions which have seemed to annoy the average radio "bug" considerably, — especially those residing in cities where it is difficult and frequently impossible to bury an aërial longer than a few feet. We may say right here, that for those experimenters so situated, there is a solution, or in fact, two solutions, namely—to use a *spiral antenna,* such as has been tried out successfully in U. S. Naval tests on the Rogers System, and which spirals may be buried in the ground a few feet, or placed in a well or other body of water; and secondly, for the experimenter who is not allowed to disfigure an apartment house or other pretentious dwelling with an ugly looking aërial, there is the newly developed *loop antenna,* which can be used right in the radio room. Indoor aërials have been greatly perfected during the war, and now by means of greatly improved and highly sensitive wireless receiving instruments and amplifiers available, particularly those using audions as detectors and amplifiers, they are excellent, and satisfactory results are obtainable by means of a concentrated loop or spiral antenna, small enough to be placed in the radio laboratory.

For the present, we will listen to the sound advice given by our mutual friend, Mr. James Harris Rogers, on some of the practical outstanding features of his underground system, used in conjunction with straight-away single wire underground aërials, as well as loop aërials. Among other things, Mr. Rogers has the following to say regarding the installation of simple underground aërials:

Mr. Rogers Talks to the Amateurs.

"The first installation of my underground antenna was made in the woods about a mile from my laboratory and consisted in burying wires in the earth; the wires radiated from the station as the spokes of a wheel,—*some wire bare* and *some insulated;* their lengths varied from 200 to 1,000 feet. (See Fig. 1).

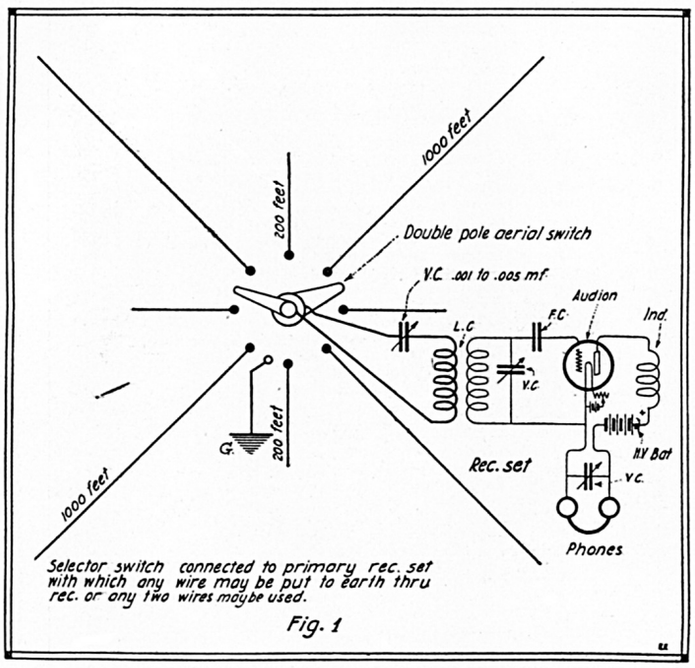

Rogers Underground Aërial System for General Requirements, Showing Bipolar Selector Switch Connected to Primary Circuit of Receiving Set. Any Aërial Wire May Be Grounded Thru the "Set," or Any Two Wires May Be Used as Desired.

"It is obvious that a number of persons can receive at the same time, one operator to each wire. There is no interference, one with another. Figure 1 shows eight (8) wires and a bipolar selector switch connected to the primary receiving circuit. With this switch any individual wire may be *grounded,* or any *two wires* may be used. *Bare wires give the loudest signals but static is more pronounced.* The deeper the wires are buried, the better the signals, with a corresponding reduction of static. Short wires show a remarkable degree of directivity; long ones to a less degree and in proportion to their length. (See Figs. 2 and 3).

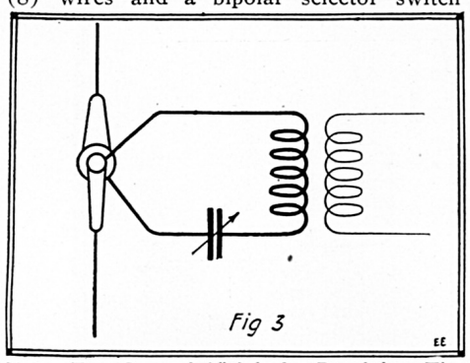

Using Two Ground Aërials for Receiving. The Aërials Should Lie in the Plane of the Station Being Received.

"When using two wires at right angles to each other, signals are heard from any direction. (Fig. 4).

"The system works best in fresh water or very wet earth. The primary circuit should have a variable condenser (.001 m.f. or higher capacity) in series. When insulated wires are covered with metal, lead, iron, etc., some remarkable results are obtained. These wires may be entirely enclosed in an iron gas pipe, for instance, (Fig. 5), or the joints may be connected by rubber hose. (Fig. 6).

"Here are some measurements taken with this last form of aërial:

Audibilities with *one bulb* only, on "Nauen" station, Germany:

Length Antenna	*When signals are weak*	*When better*	*When best*
2,000 feet..	15	25	50
2,500 " ..	30	50	100
3,000 " ..	60	100	200
3,500 " ..	120	200	400
4,000 " ..	240	400	800

"Regarding the tests with loops I will state briefly that I have successfully tried different forms and sizes.

"I first had a well bailed out and lowered a loop antenna into it; the well was 50 feet deep. (See Fig. 7). The signals were as loud at the bottom as when above the earth. I next had the well filled with water and the results were the same, excepting that **the note of the sending station became higher and higher as it was lowered.** Upon revolving it I found the directional characteristics were the same in the water as when out. These tests were made about two years ago, and I at once realized that *loops* or *cages* could be used in the dugouts of France, or on submarines when submerged.

Regarding the dimensions of loop antennae used on submarines, these coils measure about 3 feet square in some instances. The wires are very heavily insulated and placed in a box filled with pitch, the connections are lead below and the coil can be revolved for directional observations."

Kind of Wire Used for Underground Aërials.

Most of the inquiries from Radio Experimenters and those intending to install experimental stations, and wishing to make use of the "static-proof" Rogers underground antenna, on which signals may be received *even thru a thunderstorm,* indicate that the greatest problem to solve seems to be the size and the kind of wire to be used, and how it shall be buried. Some very excellent results have been obtained in

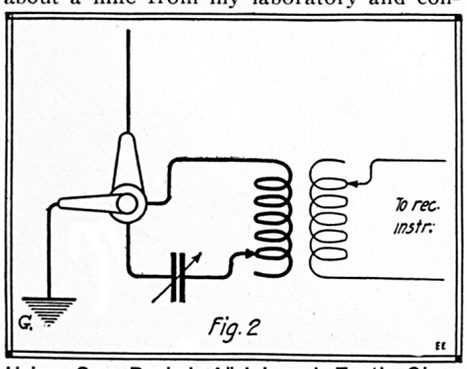

Using One Buried Aërial and Earth Gives Same "Directivity" as When Two Wires Are Used.

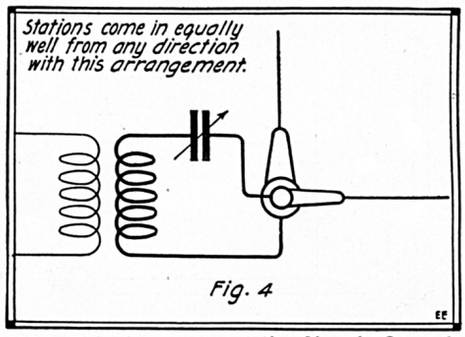

With This Arrangement the Signals Came in Equally Well from Any Direction. A Good "Stand-by" Hook-up.

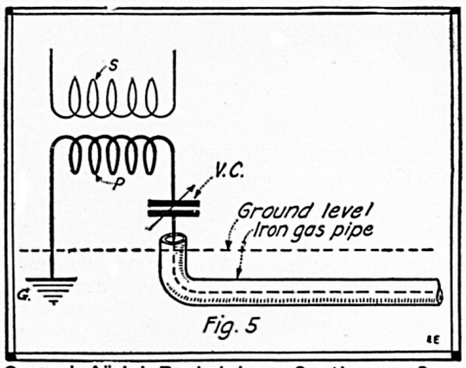

Ground Aërial Buried in a Continuous Section of Iron Pipe. Excellent Results Have Been Obtained with This Scheme.

experimental work carried on at one of the leading American universities with aërial conductors laid on the ground, and where the experimenter has the time and space to try this out, he may gain some useful and valuable knowledge by experimenting in this direction. Ordinarily the wire, of whatever kind it may be, as used when installing the Rogers underground aërial, is buried about **three feet deep in the earth.** For most Amateur requirements, the wire only need be about 100 to 200 feet long, and so the digging of the ditch is not such a great problem; in fact, it can be plowed open, at least part of the depth, and where rivers, brooks or ponds are available the insulated wire can be placed in them directly and allowed to rest on the bed.

Regarding the choice of wire to be used, it becomes evident that even bare copper or other wire may be utilized when desired, as Mr. Rogers has pointed out in the above contribution. The size of this wire should be about No. 12 or 14 B. & S. gage, the heavier the better.

The official U. S. Navy reports of tests on the Rogers Underground System mention that no increased efficiency is obtained by using more than one wire, and that this may be a No. 12 or 14 B. & S. gage, weather-proof or rubber-covered copper conductor. In any case, the free end of the wire should be well taped, and preferably covered with some rubber cement, so as to keep it insulated. Experiments have been tried both by Mr. Rogers at his Hyattsville, Md., laboratory, and also by the Navy Department, with underground aërials placed in terra cotta pipes, but this construction is rather expensive, and the results obtained do not justify its use.

Other forms of wire used both by Mr. Rogers and the Navy Department experts include lead-covered telephone cable, which is, of course, thoroly damp-proof, while a conductor holding considerable favor with the inventor is the heavy rubber-covered, high-tension, auto ignition cable. This is highly efficient for aërial requirements, as it is stranded and therefore of low high frequency resistance.

In any case, a little common sense and logic will give the answer to many of the simple problems arising in connection with the installation of these aërials, such as, for instance, the length of aërial to be used for a certain range of wave lengths. **It is manifest that the longer the antenna, the longer the wave length to which it will properly respond.** Considering that an antenna is used having a length of, say, 150 to 200 feet, then practically all the shorter wave lengths up to 600 meters and more should be readily picked up on this antenna, especially with the variable condenser hooked up in series with the primary of the loose coupler, as shown in the accompanying diagrams. Naturally the wire buried in the ground has a higher electrostatic capacity than the old-style antenna wires, elevated 40 to 50 feet above the ground, and we can reduce this capacity as desired, so as to tune any certain wave lengths, by connecting another capacity in series with it; in exactly the same manner as short wave lengths are tuned in on the regular elevated aërials, by connecting a variable capacity in series with the antenna circuit, and the primary of the loose coupler. Long wave lengths are tunable by using large condensers and loose couplers preferably.

AUDIONS ON ALTERNATING CURRENT

Well, "Radio-Bugs," the very latest thing in Audion circuits is to cut out the expensive high voltage batteries, which are forever deteriorating and necessitating the purchase of new ones, or else the use of messy miniature storage batteries, and to operate your Audions, both filament and plate circuits, with ALTERNATING CURRENT. Sounds impossible, doesn't it? But it is a fact, nevertheless. Don't miss this important article, which will be worth many dollars to you, to appear in the next issue of the ELECTRICAL EXPERIMENTER. Read this special article entitled "Operate Your Audion Receiving Set on A.C." by Elliott A. White, formerly instructor in Radio at the Carnegie Institute of Technology, with diagrams and complete data on the building of the transformer, and other details. This is but one of the big feature Experimental Radio Engineering articles we have in preparation for the July number. It is the greatest revelation you ever read in Radio literature. Don't miss it, "Radio-Bugs"!

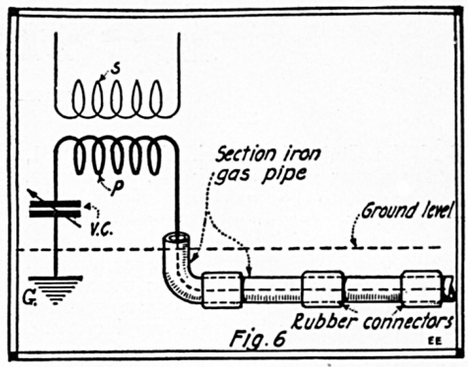

Here the Iron Pipe Jacket Surrounding the Buried Aërial Is Divided up into 20-Foot Sections by Means of Rubber-Hose Connectors; a Later Development.

Spiral or Loop Aerials.

As shown in the diagram, Fig. 7, interesting results were obtained with a spiral antenna, composed of a dozen or so turns of insulated wire, such as high tension cable or No. 14 R. C. solid conductor lowered into a well, both with and without water in it.

As pointed out in the original article on the Rogers underground system in the March issue, very promising results have been obtained in transmitting with the underground antenna, and Fig. 8 shows how a small transmitting set was operated with such an aërial, coupling the exciting or spark gap circuit with the antenna oscillatory circuit by means of a two-coil oscillation transformer, L, C. In this case two metal plates, about one yard square, are placed in the earth adjacent to the well, one of which connects with the secondary, S, of the oscillation transformer, while the other plate connects with the free end of the spiral antenna.

If the spiral antenna is used, it should be mounted so as to be revolvable on its vertical axis, and it should be placed in the vertical plane as shown in Figs. 7 and 8. Excellent results have been and should be obtained in transmitting with the underground antenna, with the usual insulation incident to the form of conductor above

(*Continued on page* 187)

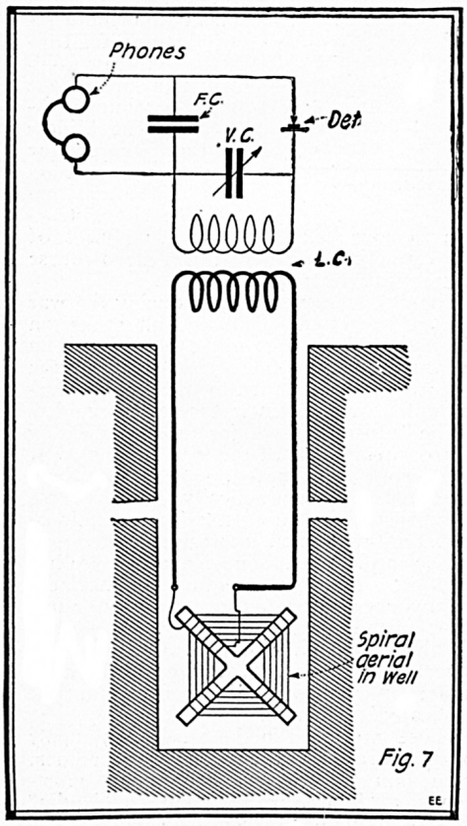

Some Very Surprising Results Were Obtained in Receiving with a Spiral Antenna Lowered into a Dry Well. Slightly Different Results Were Noticed with Water in the Well.

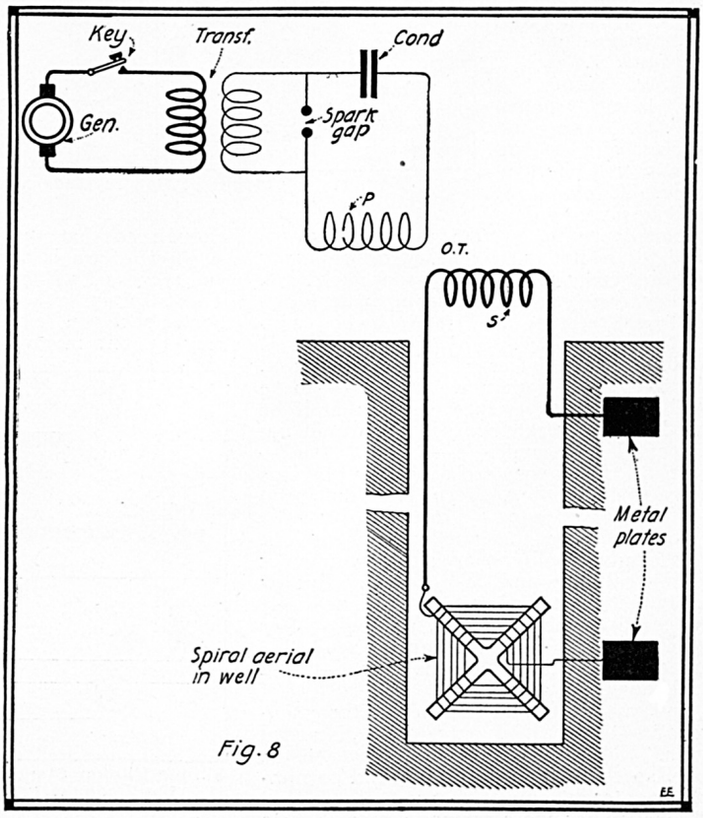

Distances up to Fifty Miles Have Been Covered Very Successfully in Transmitting with the Rogers Underground Aërial. In This "Transmitter," the Spiral Antenna Is Placed Down in a Well, Metal Ground Plates Being Connected as Shown.

Learning the Code

By HOWARD D. WILDMAN

IN the June, 1918, "E. E.," page 101, there was an article by Mr. Rockwood, relating to Thomas Reed's idea in the January issue, about a new scheme for learning the Continental code. Mr. Rockwood says he tried the scheme himself, but found he often accented in the wrong place and so got the wrong letter. I foresaw this possibility before I tried out the idea and hunted up one substitute word—L—"lo-*cal*-ity." The others I found O. K. Mr. Rockwood says the catchword for "J" is "Jerusalem." It isn't. It is "Ja-*pan-now-owns*," and I have found that you can't get it wrong.

Now as to my experience—before I read Mr. Reed's article I knew only two or three letters—e, i, t. I read the article and memorized the catchwords.

Before this I had tried several times to learn the code, but I was apt to get .—.. for .—. or ..—. for ——.— After memorizing the catchwords, in an hour or so, I could write a sentence and then rewrite it correctly in dots and dashes. At that time I had no key, receiver or anything but an A. C. toy transformer, a rheostat and a few other instruments. I made a key and receiver and practised sending to myself. A friend of mine learned the code meanwhile by memorizing the dots and dashes—a long process, during which time I learned to recognize the sound in the receivers. To this day he occasionally, when sending, shouts to me, "Hey, what's 'P'", or something similar, and I can always tell him.

Mr. Rockwood says one must by this method learn the system and then *unlearn* it. This is not quite true. One *gradually* gets to send without using the catchword. Finally one gets to the point where one sends or receives as Mr. Rockwood says it should be done. This comes of itself without effort, after a little familiarity. My friend will sometimes take .——to be "U," etc. My experience proves that if he had learned by catchwords, this would not happen. I don't confuse ..—. with .—.. or .— with —. The catchword positively prevents mistakes in sending, as you wouldn't send —. for "away," nor ..—. for "lo-*cal*-it-y."

For receiving, the catchword is useless. This can be readily seen as ..—. would not readily call to mind "fi-li-*pi*-no.". But by using the catchword to send to one's self you learn to recognize ..—. as "F." After some practise, when you want to send "F," you do not think "fi-li-*pi*-no," or ..—. but send it without thinking.

You say—"Of what use then, is the catchword? It is learned only to be discarded again." The catchword serves to teach the code, so that the student can send to himself and teach himself to receive.

Thus we see the catchword is of no help in receiving. But at first it is a great help in sending, as it prevents confusion.

Briefly then, the idea is to be able to send so as to teach one's self to recognize .—.. as "L," etc.

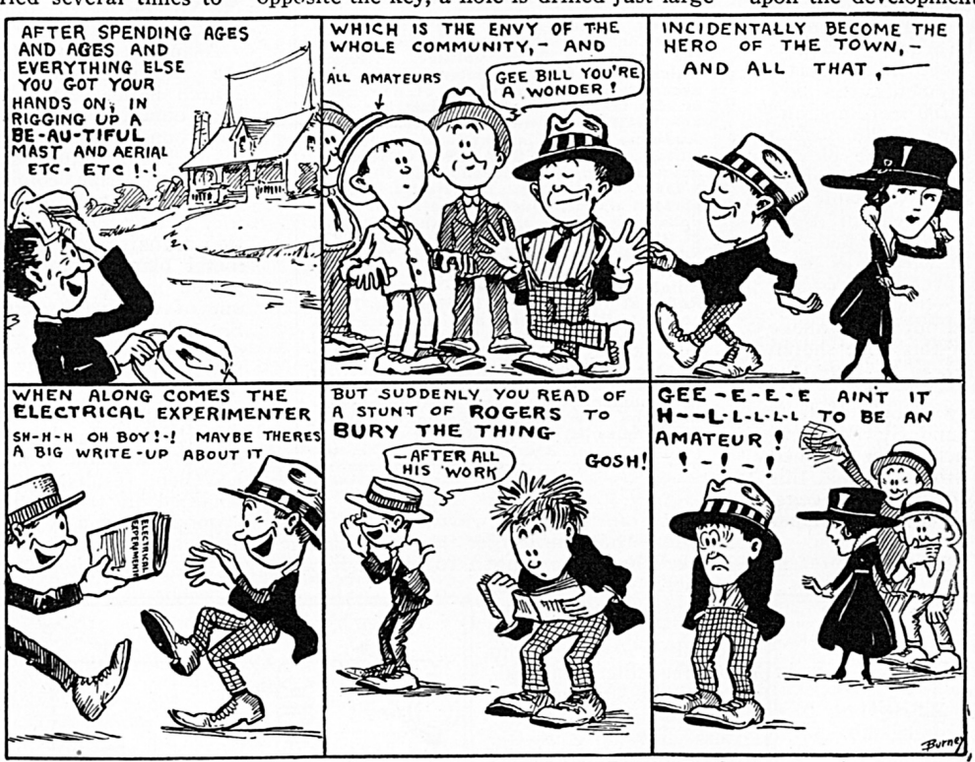

What the Advent of Rogers Underground Aërials Did to Radio-Amateurdom—By H. B. Burney.

A BLINKER SIGNAL SET.

This device consists of a key, dry-cell buzzer, 2 point switch and lamp. The lamp is used for signaling at night, the key being used to make the dots and dashes which the lamp flashes. The buzzer is used when it is impractical to use the lamp.

First procure or make a wooden (small cigar box), just large enough to contain a dry (or flashlight) cell. On top of this box a strap key made from a strip of brass and with a poker chip for a knob is placed. A flat-headed screw serves as a contact point. In the center of the box is placed a box-type buzzer, and near the end opposite the key, a hole is drilled just large enough so that the lamp will fit snugly. A piece of tin is bent to the shape shown and serves as a shield to the operator's eyes. This also acts as a reflector. By using the hook-up shown, either the lamp or buzzer may be put in circuit by using the 2 pt. switch screwed to the side of the box.

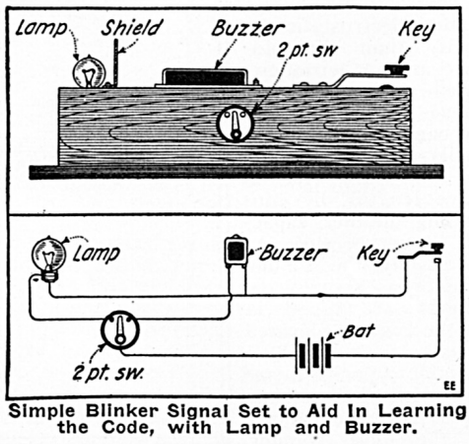

Simple Blinker Signal Set to Aid In Learning the Code, with Lamp and Buzzer.

Contributed by P. J. FAULKNER, JR.

RADIO IN THE NAVY.

THE development of wireless by the Navy Department during the war has been so remarkable in many phases that it is almost unbelievable. Apparatus known before the war to only a few scientists and perhaps a few of the more progressive amateurs has been developed by the Navy and placed in practical use to such an extent that it has entirely revolutionized radio operation and will eventually be so applied in commercial work as to greatly increase the scope of radio communication. The work of the radio operator will be so broadened that he will rank as a highly skilled technical specialist.

The development of the radio telephone, radio compass, direction finder, submarine listener devices, etc., have depended largely upon the development of the "audion" and its application to radio communication. The use of the various methods for the elimination of static have permitted the employment of extremely sensitive audion receiving sets employing a number of steps of amplification. This depends, of course, upon the application of the audion. All of these things have so complicated the art of operation as to require a very much broader and technical course of instruction than has heretofore been found necessary.

The Navy Department has approved plans for the centralization of all instruction in radio work in one of the great training stations in the Middle West where they are now organizing a school comprising a course of instruction to cover all these modern phases of radio practise, together with a thoro course in practical electricity.

The development of radio during the war has so interested scientists and others in the many advantages to be obtained from its various applications that it is certain that it will never return to the comparatively limited field which it formerly occupied.

The future in store for those possessing thoro acquaintance of the modern phases of radio work is unlimited. The entire Navy personnel is now, practically, in the course of reconstruction and offers an exceptional opportunity for men interested in electrical and scientific lines. The Naval service has need of, and promises rapid advancement to anyone willing to put forth the same effort in the service as would be necessary for him to make a success in civil life. The opportunity to secure a training in the most modern phases of radio work cannot be duplicated elsewhere.

Those interested in the service may apply to the nearest recruiting officer and request from him information concerning enlistment as "Apprentice Seaman for Radio" or, should further information be required, write to the Officer in Charge of the Radio School, Great Lakes, Illinois.

USE OF CONTACT DETECTORS IN RADIO MEASUREMENTS

By Dr. L. W. Austin,
U. S. Naval Radio Laboratory.

For many measurements in radiotelegraphy it is necessary to use a radio frequency-current indicator of known resistance. If the current to be measured is small it is generally customary to use a thermoelement and galvanometer. The most sensitive thermoelements are either of the vacuum type or the welded tellurium type. The vacuum thermoelements can be obtained of any desired resistance and are very sensitive, but are slow in action and frequently show a bad zero drift. In addition, the deflection usually shows considerable divergence from the current-square law. The tellurium platinum elements are quick acting and follow the current-square deflection law with sufficient accuracy for all practical purposes. They are, however, so fragile and difficult to manufacture and transport that no manufacturer has yet undertaken to supply them commercially. It is also impossible to make the contact resistance much less than 10 ohms. It is to be noted that the resistance in both the vacuum and tellurium types changes considerably with the amount of current flowing.

On account of the difficulties mentioned, the sensitive thermoelements in our laboratory have been replaced, for the most part, by a shunted contact detector circuit arranged as shown in figure 1. Here *LC* is any oscillating circuit having inductance and capacity, *D* is a contact detector, *G* a high resistance galvanometer, *K* a paper condenser of one microfarad capacity, and *R* a resistance which may have any value from 0.1 to 100 ohms. The greater part of the radio-frequency current passes thru *R*, while a small portion is shunted thru the condenser *K* and the detector. The direct current from the detector after passing thru the galvanometer returns thru R. On account of the high resistance of the detector, the total resistance of the detecting system is practically identical with *R*, as has been experimentally tested between 0.1 and 100 ohms.



Owing to Several Difficulties Experienced with Sensitive Thermoelements in the Radio Laboratory, the U. S. Naval Radio Laboratory Utilizes Instead the Unique Arrangement Here Shown. This Scheme Comprises a Shunted Detector Circuit, where L-C is Any Oscillating Circuit Having Inductance and Capacity; D is a Contact Detector; G a High Resistance Galvanometer; K a Tin Foil and Paper Condenser of One Microfarad Capacity, and R a Resistance Which May Have Any Value from 0.1 to 100 Ohms. The Greater Part of the Radio-Frequency Current Passes Thru R, While a Small Portion is Shunted Thru the Condenser K and the Detector. The D. C. from the Detector After Passing Thru the Galvanometer Returns Thru R. The Sensibility of this Arrangement is Much Greater Than That of the Best Vacuum Thermoelements of Equivalent Resistance.

The sensibility of this arrangement is much greater than that of the best vacuum thermoelements of equivalent resistance.

In the case of most of the well-known detectors the proportionality between deflection and current-square is excellent. Galena, while the most sensitive of any of the detectors tried, shows a slight deviation from the square law. For absolute current measurements the system must of course be calibrated by comparison with a known thermoelement at the time of experiment.—*Journal Washington Academy of Sciences.*

Automatic Code Transmitter

I present herewith design of an automatic tape transmitter that I constructed and which runs very well. Details: Motor —This is an alarm clock which had "given up its ghost." I pulled it out of its case, removed the balance wheel, hair spring and the little lever—whatever its name is—and also the ratchet wheel, which I kept. I also removed the face, both hands and the driving mechanism for the hour hand. I then drove on the minute hand shaft a block of wood 2 inches by 2 inches by ½ inch, so that the shaft did not come quite thru the block (Fig. 1). On F I screwed a block of thin wood 2 inches by 2 inches with an 8/32 bolt 1 inch long thru the center of it, and a nut on the bolt (Fig. 1, K); on this bolt I put an empty typewriter spool, S, which I held on by bolt and nut (Fig. I, N). Light spools for the purpose can easily be made up by the experimenter from fibre and brass odds and ends.

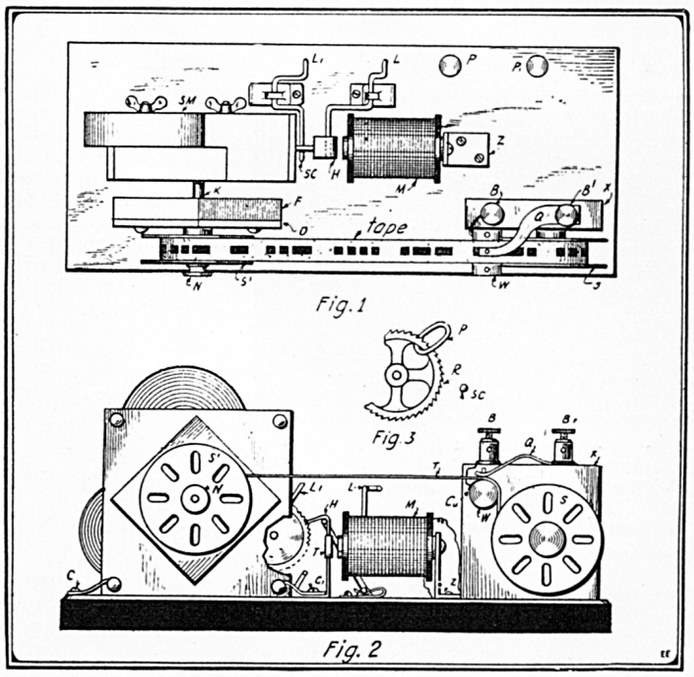

The Paper Tape Used in This Code Teaching Instrument Can Be Cut from the Border of a Newspaper, and the Dots and Dashes Punched in It With a Conductor's Ticket Punch.

Transmitter—On the base I fastened (Fig. 1, X) a wooden upright 2½ inches by 2½ inches by ½-inch in line with (Fig. 1, F). The peg, W, covered with copper sheet, Cn, is inserted in a hole in the wood; in W are inserted two small brads to keep the paper tape in proper alignment. Cu is connected to B and a fine brass brush, Q, bears on the tape and connects with Cu when an opening appears. S is another typewriter ribbon spool running on a headless wire nail.

Regulating Devices—Speed—The ratchet wheel aforementioned is treated by cutting out about one-third of it, Fig. 3, and also an oval of wire, P, is fastened loosely around the rim of the wheel (R); this ring hits on Sc, Fig. 1, which is a wire held in a spring binding post so it can be regulated. This regulator and the cut ratchet wheel are used to keep the spring motor from running away with itself.

Brake and Release—Consists of a thin copper spring, H, Fig. 2, fastened in common with one of the two clips which hold the motor down, H, has some sheet iron wound around it at T to form an armature, so that the electro-magnet, M, fastened on support, Z, can act on it.

The auxiliary release, L, is a bent copper wire (No. 14 B. & S. gage), which swivels on a spring post to release the brake H.

The electro-magnet is connected to binding posts, P and P, and is wound full of No. 28 B. & S. gage magnet wire.

Contributed by
GEORGE HARRINGTON.

A New Type of Transformer

A great many experimenters are in the position of having outgrown the "spark-coil" stage, but do not have the necessary funds to buy or construct a transformer using the 110 volt A. C. They are then burdened with a spark coil, which they usually attempt to use by means of an electrolytic interrupter, which will use an excessive amount of current without a very high degree of efficiency. In some cases the spark coil has been taken apart and an attempt made to use the secondaries. But it is easy to see that this cannot be done on the usual type of open-core transformer, for after winding three or four layers of heavy wire on a core about two inches in diameter, the total size is too great to permit the secondaries to be slipt on over the coil.

A plan that has given very good results is shown in the diagram. As will be noted, the primary is wound in the center of the core, *and a secondary slipt on each end.*

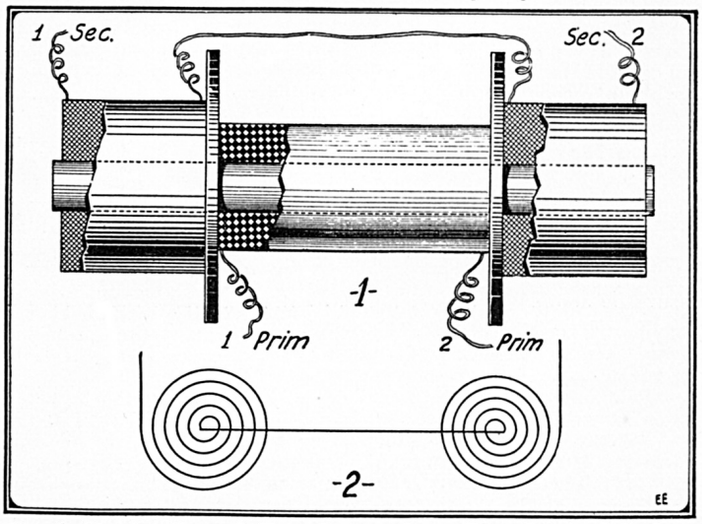

Novel Construction of Transformer from Two Spark Coil Secondaries, with the Primary Coil Placed Between Them.

The core is constructed of soft iron wire

(*Continued on page* 174)

Choke Coils--Theory and Design

By F. E. AUSTIN

Professor of Electrical Engineering, Thayer School of Engineering, Dartmouth College, Hanover, N. H.

THE writer who is constantly in receipt of inquiries from those desiring to know how to construct choke coils to meet certain requirements, takes this opportunity to explain somewhat briefly the theory underlying the

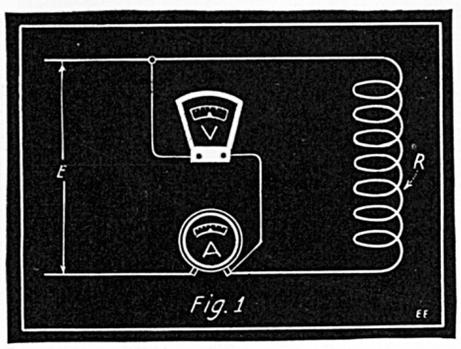

When a Coil of Magnet Wire Is Connected to an A. C. Circuit, the Current Is Measured by an Ammeter and the Potential by a Voltmeter. The Current Absorbed Depends upon the Number of Turns and Kind of Core Used in the Coil.

construction of choke coils, and to give directions for the construction and operation of such coils.

Choke coils are simply coils of insulated copper wire thru which alternating currents are allowed to pass and by means of which the *amount* of the alternating currents may be regulated as desired. The regulation is effected by the action of the counter-electromotive-force induced in such coils due to the continuously varying magnetic field set up by the varying alternating currents. The consideration of the variation of counter-electromotive-force is therefore the important question in the building and operation of all choke coils.

When a coil, formed by winding a number of turns and layers of double cotton covered copper magnet wire about an insulating tube of say hard fiber or cardboard has an alternating pressure applied to its terminals, as indicated in Fig. 1, an alternating current flows thru the wire of the coil according to the well known equation:

$$I_{ac} = \frac{E}{\sqrt{R^2 + (2\pi f L)^2}},$$ in which I_{ac}

denotes the current in amperes, indicated by an ammeter connected with the coil as indicated in the figure; E denotes the applied alternating pressure in volts, indicated by a voltmeter at V in the figure; R denotes the resistance of the coil in ohms, which may be measured by experiment, using a voltmeter and an ammeter with *direct current* or by the use of a Wheatstone bridge testing set, or which value may be *calculated* from the size of the wire and its length; f denotes the frequency of the applied pressure in cycles per second, and L denotes the so-called coefficient of inductance of the coil. Should a direct current pressure be applied to the terminals of the coil, the current would be exprest simply by Ohm's law as:

$$I_{dc} = \frac{E}{R}$$

It is evident by comparing the two equations, if the applied pressure *A. C.* and the applied pressure *D. C.* should have the same numerical value in volts, there would be much less resulting current according to the first equation than from the second, if the term exprest by $(2\pi f L)^2$ has any considerable numerical value. This of course depends upon the value of f and of L. The value of f is fixt by the value of the ordinary commercial frequencies of power circuits, ranging from 40 to 100 cycles per second, with 60 cycles as a very common frequency. The value of L depends upon the square of the number of turns on the coil, and very largely upon the material that is inserted into the coil to serve as a core.

The value of L is exprest by a unit called the *henry,* may be very easily and quickly ascertained by experiment for any coil, and may be quite accurately calculated from the number of turns wound on the coil, the area of cross-section of the central hole thru the coil and the length of the coil, when there is no iron or other magnetic material near the coil.

Let us examine somewhat carefully the first equation. First, suppose the value of f is O; then $2\pi f L = O$ and the equation becomes:

$$I_{ac} = \frac{E}{\sqrt{R^2}} = \frac{E}{R}$$ or Ohm's law.

When $f = 0$, the current is a direct current, and Ohm's law should be applicable. Next suppose $L = 0$; then also will

$$I_{ac} = \frac{E}{\sqrt{R^2}} = \frac{E}{R}$$ and Ohm's law again ap-

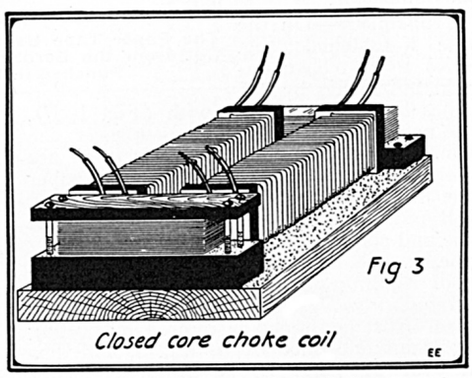

A Well-Designed Choke Coil of the Double-Pole, Closed-Core Type. One-half of the Winding Is Placed on Each Leg of the Laminated Sheet Iron Core.

plies. The value of L can be 0 only when the wire constituting the coil is not wound in the form of a coil; that is only when it is *straight.* The *A. C.* current in a straight wire is the same as the *D. C.* current if the numerical value of the *A. C.* pressure is the same as the numerical value of the *D. C.* pressure.

For illustration, suppose the value of L is, first, 1 *henry* and that $f = 60$. The numerical value of the term $(2\pi f L)^2$ becomes $(2\pi \times 60 \times 1)^2 = 377^2$; (very nearly). It may readily be appreciated that the $2\pi f L$ term has a very important bearing on the numerical value of I_{ac} when the values of E and R are fixt. The value of E is always fixt by the pressure of supply, the value of R is of course fixt when the coil is wound. Usually the frequency is also fixt by the frequency of the supply, which leaves L as the only variable quantity remaining that allows a variation in the current denoted by I_{ac}. After a coil is wound, the value of L is not variable unless the windings on the coil may be varied. This of course is not feasible except within rather narrow limits. The coil may be wound in sections, with taps, arranged for connecting with apparatus, thus allowing a variation in a comparatively few steps.

If the coil is provided with a movable iron core consisting of varnished iron wires, the means are provided for not only giving a very wide variation to L, but for making the variation absolutely gradual.

Suppose, for example, that a coil has an ohmic resistance of 5 ohms and a coefficient of inductance of .0162 *henry.* Find the current in the coil when an alternating pressure of 110 volts at 60 cycles is applied to the terminals of the coil? Making the proper numerical substitutions in the fundamental equation gives:

$$I_{ac} = \frac{110}{\sqrt{(5)^2 + (2\pi \times 60 \times .0162)^2}}$$

$$= \frac{110}{\sqrt{25 + (377 \times .0162)^2}} = \frac{110}{\sqrt{62.7}}$$

$= 13.9$ amperes.

With an applied direct-current pressure of 110 volts the current in the same coil will be found from:

$$I_{dc} = \frac{110}{5} = 22 \text{ amperes.}$$

The coiling of the wire, therefore, accounted for $22 - 13.9 = 8.1$ amperes.

In order to reduce the current to 13.9 amperes on a direct current circuit, it will be necessary to introduce a resistance in series with the coil having a value of

$$R_x = \frac{110 - 69.5}{13.9} = 2.9 \text{ ohms.}$$ This may

be understood better by consulting figure 2, which represents the coil connected in series with an auxiliary resistance R_x across a 110 volt circuit.

The current in this arrangement may be exprest by:

$$I_{dc} = \frac{E}{R + R_x};$$

and if the proper numerical values are substituted in this equation the result will be:

$$13.9 = \frac{110}{5 \times R_x}$$, from which

$(5 + R_x)\ 13.9 = 110;$

$5 \times 13.9 + 13.9\ R_x = 110$

$13.9\ R_x = 110 - 5 \times 13.9$

$$R_x = \frac{110 - 5 \times 13.9}{13.9} = 2.9 \text{ ohms.}$$

(*Continued on page* 185)

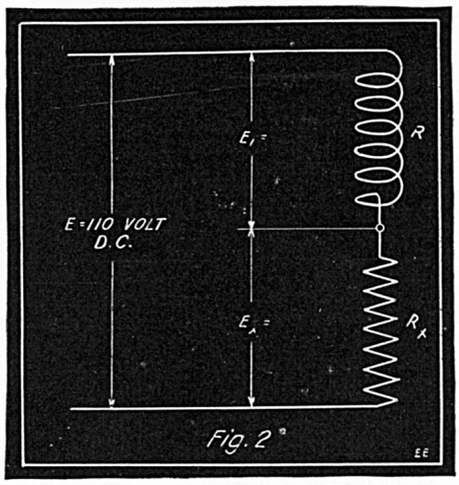

Experiment with Choke Coil Designed for A. C. Circuit Connected to D. C. Circuit, Showing the Effect of Inductance or Impedance on the Current Consumed.

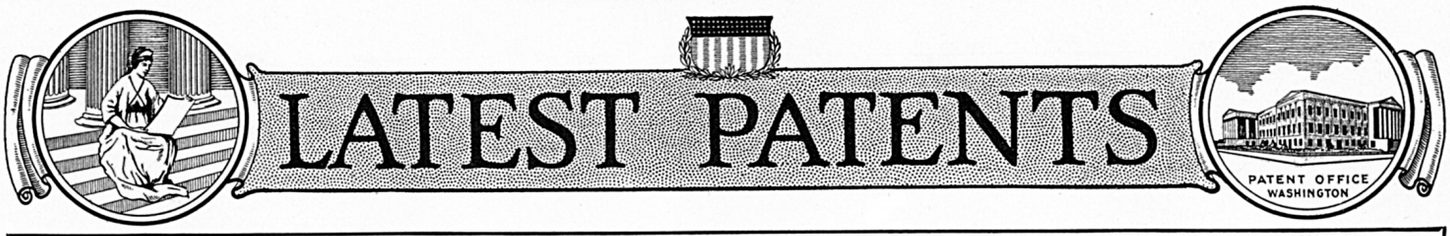

Luminous Attachment for Gun-Sights.

(No. 1,292,211, issued to Harold S. Young and F. H. Ihde.)



The sighting plate mounted on the front end of the firearm is coated with a covering of luminous paint, or some such other light-radiating pigment, which can be easily discerned at night. The benefit of this improvement in sights is that the marksman looking thru his rear sight can easily discern his forward point or sight due to the fact that the same is covered with this radium paint.

Electrical Condenser.

(No. 1,292,589, issued to R. F. Darmezen du Rousset and Chas. E. Brandt.)

It is a generally accepted fact that in electrical condensers formed of flat conducting surfaces separated by some dielectric the charge is unequally distributed from the center to the edges, its density being greater toward the perifery where the ruptures are always produced. In this new form of invention a condenser is provided whereby it is



possible to localize the maximum tension at the central point of the system, and also increase the capacity for a given diameter. It consists of a number of discs arranged in the form of a quenched gap, wherein metal plates with concave surfaces are used, and between these various plates insulating discs are placed.

Photographic Phonograph.

(No. 1,291,702, issued to Frank W. Adsit.)

One of the principal points in this new invention is the providing of means for registering on a film the graphic representation of sound. Another object is to provide a means in connection with this film whereby a light reflected from a mirror may be



registered on either one side or the other of a center line down the film or on both sides of this simultaneously. It is also possible by special means to reproduce these graphic representations registered on the film, so that musical sounds or voice currents may be reproduced.

Automatic Record Stop for Phonographs.

(No. 1,291,985, issued to D. M. Manson.)

The principal innovation in this invention is an electrical means, whereby after a record has been played the needle will be carried back to the starting point, so that the playing of the record may be repeated. The invention as a whole consists essentially of an arm secured at one end to the sound box crook, magnetic means being provided for drawing down the opposite end of the arm, thereby raising the sound





box and needle from the record. Also a means is provided for counterbalancing the weight of the sound box during its return or downward movement. An ingenious scheme is devised whereby the tapered tube, by means of an adjustable stop, can be designed to be turned in any position to correspond with the starting point of the record, and a spring connected to the tapered tube and bracket, whereby the taper tube can be turned from the center of the record when the needle is out of contact with the record and brought back to the starting position.

System for Amplifying Variable Currents.

(No. 1,297,188, issued to Irving Langmuir.)

This invention is merely a means devised for utilizing an electron discharge and comprises several novel systems of connections whereby the weak currents can be reproduced as stronger currents. Taken as a whole, it is merely a modifica-



tion of the several step amplifier, as has appeared heretofore. In general it has some new points of interest, but taken as a whole, the invention boils down to the fact that it consists of a number of electron discharge devices connected in cascade for the amplification of currents. The bulb itself is made of quartz previous to an ultra-violet light, and into which are sealed in the usual manner an electron-emitting cathode and anode. The cathode of this particular bulb consists of potassium or sodium, which will emit electrons when illuminated by a source of light.

Magnetic Protector for Ships.

(No. 1,293,539, issued to John and Sophie Pies.)

The principal device is a form of arm extending from the ship on each side attached to an electro-magnet with a flexible chain hanging in the water, and arranged with a number of floats to depend from these extending arms. One circuit is formed in series with these magnets to a large generator, and the battery is shunted in series around



the two chains that hang from either side of the ship. The apparatus is arranged to detect submerged torpedoes, mines, etc., due to the fact that their presence would increase the conductivity between these two chains and cause the circuit to be closed and ring the bell.

Electrically-Heated Apparatus for Moistening Shoes.

(No. 1,294,533, issued to W. W. Reed.)

It has been found that much of the cracking and breaking of shoes incident to the lasting operation can be avoided by preliminarily treating with a hot vapor. A tank is provided which will maintain the water automatically at a constant level, and an electrical heating unit arranged to heat the water. A layer of absorbent material is placed on top of the heated water, and an automatic means provided for maintaining the upper surface at a constant level, thereby permitting the



vapor generated from the water to be diffused equally around all portions of the shoe.

Selenium Relay.

(No. 1,293,098, issued to A. N. Hovland.)

This new form of relay is built on the principle that a conducting wire placed in a magnetic field will be displaced laterally when an electric current is past thru the same. This fact is made use of, for instance, in wire galvanometers and in light-writing apparatus, also that the magnetic field is used to produce a very sensitive relay, utilizing one or more photo-electric cells on the general type of a selenium cell. A shutter means is provided for decreasing and increasing the resistance of the cell, and by such means it is possible to relay currents.



Illuminated Aquarium.

(No. 1,297,254, issued to Natsuo Sato.)

A novel and attractive improvement on the usual form of aquarium, which consists of a bowl which is permanently illuminated from above by electric lamps, and which are concealed in the lamp, and intended for use in drawing rooms. It consists of a metallic tube which runs up centrally thru the apparatus, and thru which tube also is run electric wires to operate the bulbs under the lamp shade. Were this tube to be in actual contact with the water, it might possibly cause some chemical reaction, which would be detrimental to the fish in the bowl The inventor overcomes this by using a glass tube over the metal pipe, which

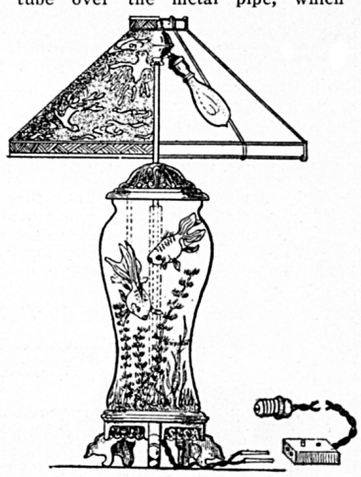

may be formed in one piece with the bowl or may be separate and cemented together in order to prevent leakage. The bottom of the bowl is arranged to present a pleasing appearance with a bed of sand.

Electric Gas-Detecting Safety Lamp.

(No. 1,294,806, issued to C. G. Hunt and John H. Coyle.)

The main feature of the invention consists of a lamp and a sealed chamber, with a source of light in said chamber. A means is provided whereby a gas pressure inside the

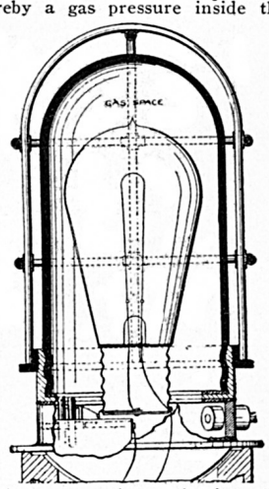

chamber normally maintains the light, but if fumes are present on the outside, this external pressure will cause the light to be extinguished. It operates on the principle that the internal pressure of the gas will normally maintain the light, but should the gas pressure in the chamber be brought to an inferior or superior pressure to that without the chamber, then the light will be extinguished.

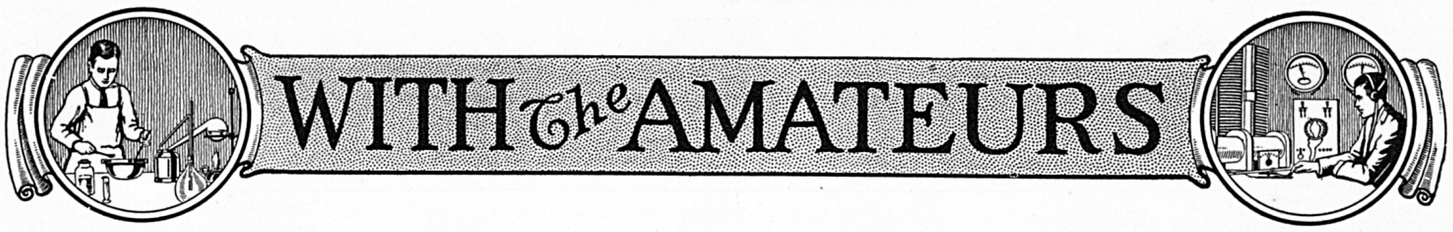

Our Amateur Laboratory Contest is open to all readers, whether subscribers or not. The photos are judged for best arrangement and efficiency of the apparatus. To increase the interest of this department we make it a rule not to publish photos of apparatus unaccompanied by that of the owner. Dark photos preferred to light-toned ones. We pay $3.00 each month for the best photos. Address the Editor, "With the Amateurs" Dept.

"Amateur Electrical Laboratory" Contest

THIS MONTH'S $3.00 PRIZE WINNER—J. CARROLL TOBIAS

I AM an appreciative reader of your magazine and wait anxiously for it to arrive from month to month. I find lots of enjoyment in looking over the photos of Amateur "Labs", and so am sending a "shot" of my own little workshop.

In this room many interesting and educational experiments are performed in chemistry, electricity, metallurgy and electro-chemistry. I have apparatus for both qualitative and quantitative analysis, electric furnace analysis of iron, steel and carbon compounds and for the analysis of coal gas and by-products. A complete bacteriological outfit is also one of my valued possessions and by its means microscopic examinations of water are conducted. This about completes the chemical end.

In the electrical division I have motors, a generator (A.C., 60 volt, 60 cycle), a 50 watt D.C. generator, step-down and step-up transformers, high frequency alternator, high-frequency high-voltage transformer, Oudin coils, Tesla coils and spark coils. I have an electric arc furnace by means of which I conduct small experiments in the production of synthetic gems, electrolytic rectifier, electrolysis apparatus and "bunches" of other "junk". At present I have under construction an A.C.-D.C. switchboard, also a three-step audion amplifier and two long wave loading coils. When the "Lab" is drest out in all its new furniture, I will send you another series of photos.

Another photo shows my radio set which has just been unsealed and which I know is just "hankering" to have the old oscillations flowing once more thru its coils. Another view shows my battery switchboard and electrical work bench with spark coils, Tesla coil, Oudin coil and other "stuff".—J. Carroll Tobias, 106 N. High St., Bethlehem, Pa.

HONORABLE MENTION (One Year's Subscription to the ELECTRICAL EXPERIMENTER) —CHESTER A. WRIGHT

Herewith are photos of my radio station. I have been a steady reader of the ELECTRICAL EXPERIMENTER for some time and get many good ideas and hook-ups. My apparatus is mostly home-made, consisting of a condenser made of heavy plate glass with aluminum sheets. The rotary spark gap is made of a 1700 R.P.M. fan, and the disc of an Edison disc record. It gives a very good tone. My oscillation transformer is made of heavy brass ribbon and is very easy to adjust. I use a Clapp-Eastham 1 K.W. transformer. My receiving apparatus consists of home-made couplers from which some very close tuning can be had. I use an audion and galena non-jarable detector, both with great results. I also have Murdock variable condensers, and two sets of Brandes' phones.—Chester A Wright, 611 Green St., Greensburg, Pa.

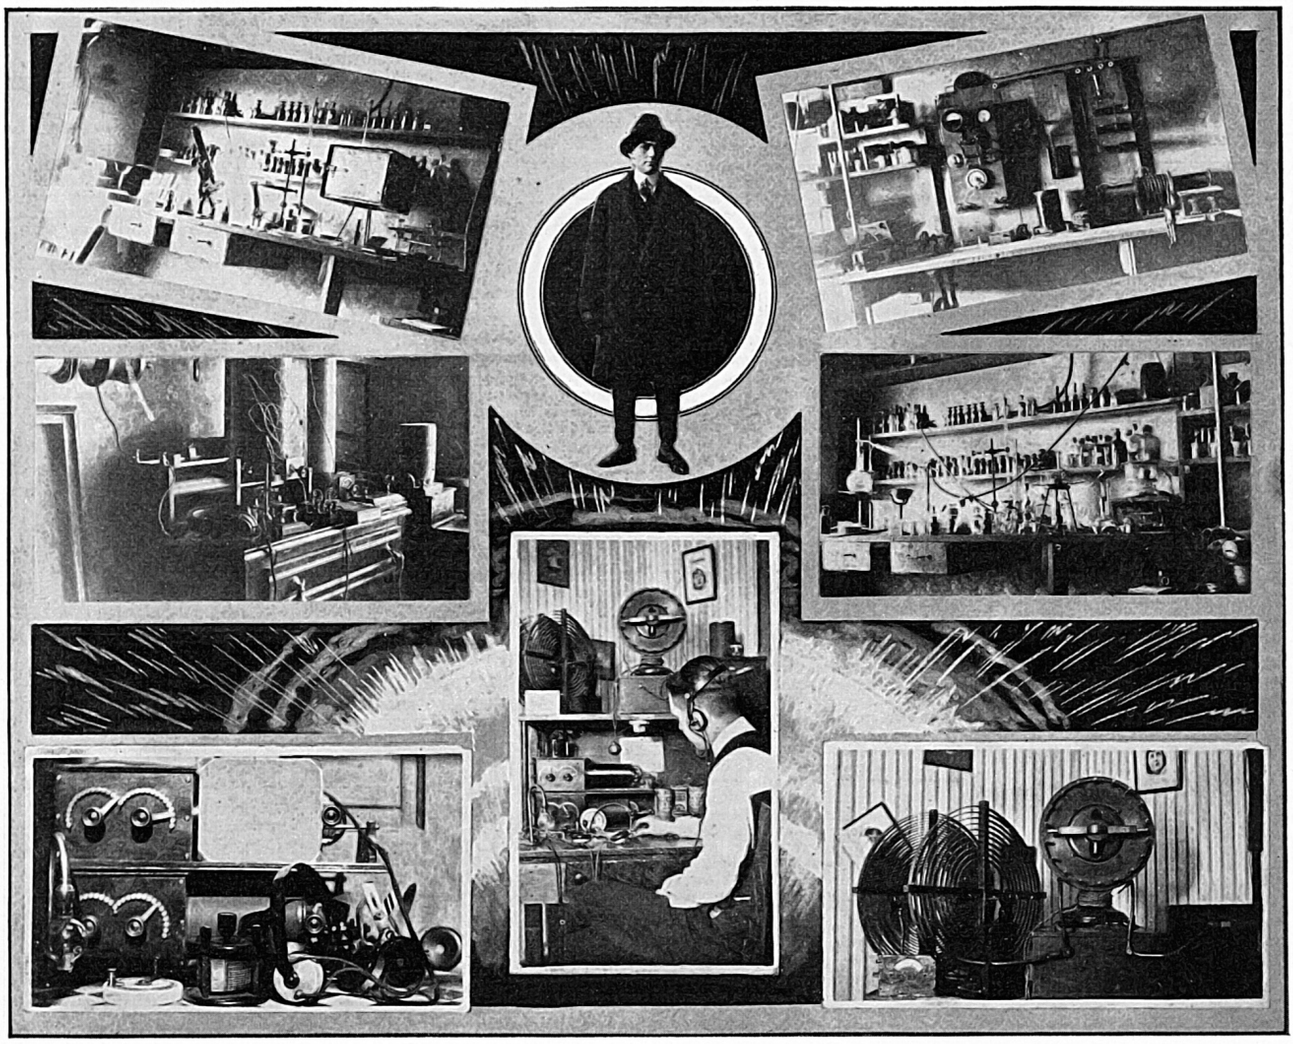

Science in Slang

By EMERSON EASTERLING

"A FUNNY thing happened the other day," laughed Punk Loomis. Stokes looked up from the telephone directory. "A guy," continued Punk, "was standing under a belt in the factory. The fellow had on rubber boots. He was talking to his wife, and when she started to leave—you see, they were newlyweds—he reached over to kiss her. WOW! You ought to have seen them! One of them got it in the nose—the other on the lips—and it cracked like a young bolt of lightning. You see, the rubber boots made a Leyden jar out of the man—a human condenser. That kiss sure had a kick."

"I guess that was about as funny to them as it was to the lady who was cleaning clothes and set the rag, saturated with gasoline, on fire in her hand by drawing a spark from the friction of the wool and silk. Both were static, you know." Here he turned and walked to the telephone and asked for long distance. In a few minutes he returned.

"Quite a commodity, this telephone. In the old days when the citizens thought it proper to run in marathons in the 'altogether,' if I should happened to have been let loose at that time, and happened to have gotten word to a guy the same distance as the present case here, I should had to have waited for at least a week—with the best runner that the country had, to tell the adjoining country to go to hades—for the answer."

"Can you reel off another sentence like that without stopping for air again?" asked Bender.

"Jumping over such improvements as Paul Revere and the pony express brought about, we land up at the chapter in scientific history where a bird by the name of Morse, with three other names before it, two of them Sam and Finley—I don't know the other—it don't make much difference anyway. What we are driving at is the fact that after muttering, 'If the presence of electricity can be made visible in any part of the circuit, I see no reason why intelligence may not be transmitted by electricity,' he rigged up a couple of magnets and an arm and anvil—behold! We have the *telegraph sounder.* Then the next thing was to contrive a series of dots, dashes and spaces to convey that intelligence he was speaking of. It took a lot of salesmanship for Sam to get his trick across, but perseverance wins out in the finale—so, first act in the comedy of the telegram.

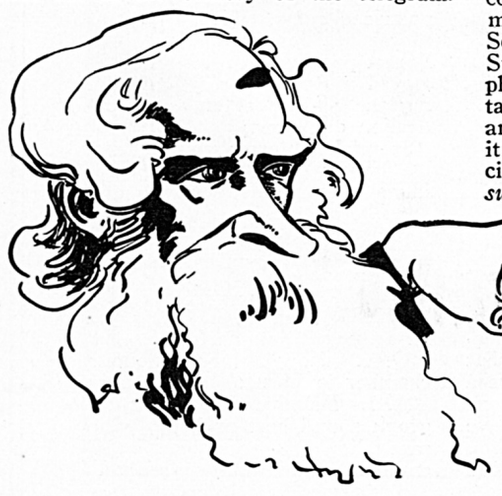

Sam Finley Morse, the Dash and Dot Kid, Also the Ancestor of the Telegraph Messenger.

Keeping the Wires Hot

"Then another guy—you've heard of him, Bell, Alexander Graham, Proff. in vocal hygiene or physiology—drops in on us. This student of the art and mechanics of the first cause for conversation got down into the throat of the matter and found out a lot about the reason why some men leave home. While trying to make the telegraph do more work for the number of wires used, it is related that this gentleman was alleged to have developed the *telephone*—but none would recognize in the original article any resemblance to the present instrument of long-distance chatter.

"Another duck—Prof. Elisha Gray—would have landed the fish if it had not been that Bell got his draftings in the patent office (no, not the Phoney Patent Offizz) and beat the dear old chap out of the glory. Which all goes to show that some great minds do run in the same channel. But Gray should worry. He is guilty for the *telautograph* being on the market. No, he is not Elisha of the fiery chariot.

"Europe was a long way off until Cyrus Field succeeded in stringing an *undersea cable* between the two continents in one piece. That made him get in rich with Congress, and he got a medal to show his friends for the stunt, too. It was in 1858—the time that George Washington was fighting the battle of Waterloo—that the cable had one end in the good old U. S. and the other in Europe. I don't suppose you care, but Cyrus gave a few kicks and gave up in the city of New York, 1892.

"You know of Nick Tesla (his picture is on one of the other pages), the fellow that pulled one over on Columbus in the egg stunt. Well, he just had to do something for the telephone and invented a *repeater* for it. Then Tom—who? Edison—improved it a lot. And a gob of other guys boosted the proposition along. Some wise guy hops along and steps on two circuits, and sticks another to work on the same lines—Hoovering on wire. It was on the same order that Bell tried to do with the telegraph, only different. They dubbed it the *phantom circuit,* altho it is not as mysterious as the name implies. Then along comes the *miultiplex system,* words and music by Major General Georgie Owen Squier, Chief Signal Officer of the United States Army, and right away he goes the phantom circuit one better by letting five talkers in on the line simultaneous together and at the same time. Not only that, but it lets a crowd of 'brass pounders' in on the circuit at the self-same operation, *tout de suite.*

"De Forest, in his wireless experiments, slipt them the pass to get in on that stunt by creating the *Audion.* That is why the system is referred to as the *wired wireless.*

"By combining wireless and the lines together, we get some pretty long distances covered by the voice. Not so long ago when some notable English guy listened to both oceans at the same time over the telephone we thought it was grand. To-day that's commonplace. Now, if the guys around the player stop coughing, and they have good conditions and sensitive instruments, it is possible to hear Hawaiian hula players do their song and dance in New York City over the wire and wireless.

"I doubt if Sam Morse knew what he really did when he constructed his first telegraph instrument. Just think of the

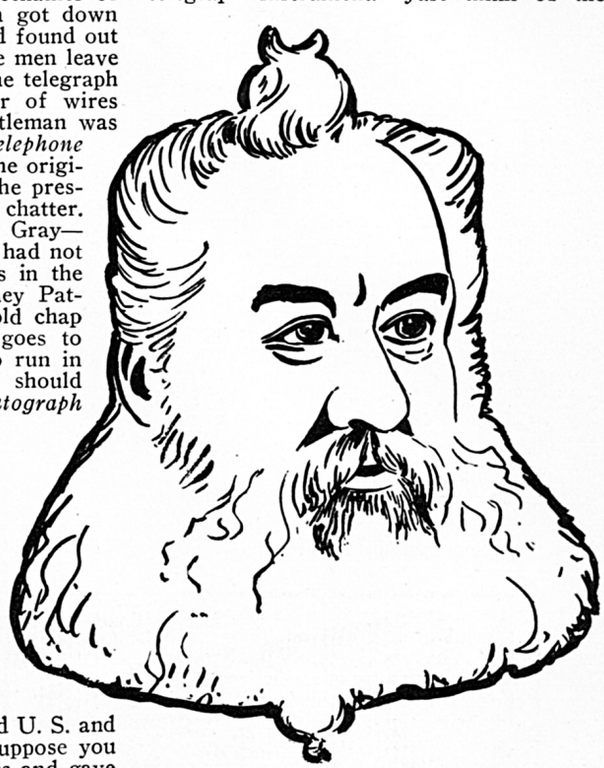

Prof. Alexander Graham Bell, the Gink Who Invented the Hello Girls.

war and sporting (accent on the sporting) wires! What would we do without them? Take the business as a whole. We would feel like we were lost without 'phones and 'wires.'

"When the real thing marches in, a load of by-products comes out on the next section. When Edison called up over a 'phone and instead of saying 'Are you there?' or 'Is this you?' he said 'Hello!' That took like 'Over the top,' 'Lay on, McDuff' and such slogans, saws, or what-you-call-'ems. Now we would think a boob crazy were he to say 'I am talking—is there anybody on the other end of the line?' 'Hello' is good anywhere, China, Africa, or Chile, but not in France, where it is 'Alloh.'

"Now, if we can only get rid of the central station," said Punk Loomis, "and replace the live hello-girl with an automatic one that will not get tired or angry when the customers cuss over the 'phone, then we will have it down pat."

"You're 'way behind the times," came back Stokes with an impatient gesture of his head. "What you want to do is to take a flying trip to Chicago and give their automatic telephone rinktum the once over. And, believe me, it is some contraption. Of course, Windy City citizens have the regular Bell 'phone also, so when they get tired of cussing the hello-girls they can switch to the automatic, which is some indoor sport. The two systems necessitate the use of two telephones in one office, and on any Monday morning you can see your Windy citizens doing the hula-hula trying to talk into two phones and to two cus-

(*Continued on page* 155)

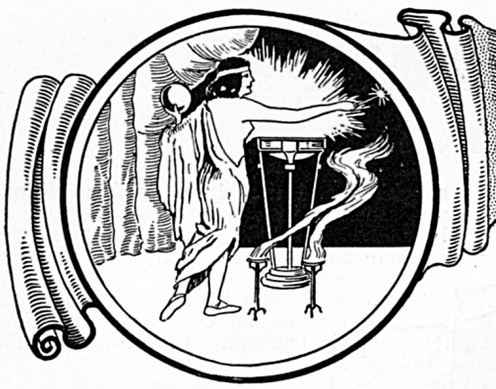

THE ORACLE

The "Oracle" is for the sole benefit of all electrical experimenters. Questions will be answered here for the benefit of all, but only matter of sufficient interest will be published. Rules under which questions will be answered:

1. Only three questions can be submitted to be answered.
2. Only one side of sheet to be written on; matter must be typewritten or else written in ink, no penciled matter considered.
3. Sketches, diagrams, etc., must be on separate sheets. Questions addrest to this department cannot be answered by mail free of charge.
4. If a quick answer is desired by mail, a nominal charge of 25 cents is made for each question. If the questions entail considerable research work or intricate calculations a special rate will be charged. Correspondents will be informed as to the fee before such questions are answered.

ROTATING MAGNETIC FIELD QUERY AND ROGER'S RADIO SYSTEM.

(1004) J. M. McDonald, St. Louis, Mo., writes:

Q. 1. Asking several questions about the rotating magnetic field and Tesla "electric egg" apparatus.

A. 1. We give you the following suggestions in answer to your questions. The rotating magnetic field is very clearly explained in the April number of the ELECTRICAL EXPERIMENTER, containing an article by Dr. Nikola Tesla on his induction motor and how it works, which we are sure will make the matter plain to you, as a clear hydraulic analogy is given therewith.

In connection with the "electric egg" apparatus, we would advise that the two opposite coils are connected so as to give North and South poles respectively.

Elsewhere in the present issue you will find a special article on the "Rogers' Underground Wireless System for Amateurs." This will answer many questions such as the one you ask concerning the length of aerial, etc., and briefly we might say that for short wave lengths of about 200 to 300 meters, a wire (rubber covered auto-cable) about 300 feet in length could be used. When the free end of the wire is grounded, the signal strength is reduced. Generally speaking, and for ordinary amateur and even commercial requirements, but one wire is found necessary.

VALUE OF THE "SOLAR CONSTANT."

(1005) Emmanuel Bellon, Peoria, Ill., writes this department:

Q. 1. About the value of the mean "solar constant."

A. 1. There seems to be indeed much promise in the development of an efficient solar energy plant, and while little has been done along this line in a commercial way of late, yet some very interesting work has been accomplished by a number of scientists, who have worked on the problem. It is a most interesting and valuable field to work in.

The result of nearly seven hundred tests conducted by the Smithsonian Institute of Washington and in various parts of the world, has resulted in accepting 1.93 *calories per square centimeter per minute,* as the mean "solar constant." This is equivalent to 7.12 British thermal units per square foot per minute. The best body for the conservation of the radiant energy into heat energy is a dead black one.

RADIO QUERIES ON MIGNON RECEIVING SET.

(1006) A. S. ———., Chicago, Ill., inquires of the Oracle:

Q. 1. What is the coil around the Audion used for in the Mignon receiving set, and also what is the object of the metal coupler core?

A. 1. Concerning the Mignon type R. W. No. 3 radio receiver, would advise as follows:

Regarding the two specific points you mention first, about the coil around the Audion tube, this is hooked up with one of the tuned oscillatory circuits, so that the oscillating magnetic field created within it, would act electromagnetically on the electron stream within the detector, somewhat in the same manner as is the case where a permanent steel magnet is placed in proximity to a vacuum tube detector to improve its operation. The effect on the electron stream is to either concentrate it or spread it, thus making the path from grid to plate either more conductive or less conductive, depending upon the polarity and position of the magnetic field.

To Our "Oracle" Friends

Do you realize that not one day passes when we do not receive from 150 to 250 letters addrest to "The Oracle"? If we were to publish all the questions and their answers we would require a monthly magazine five or six times the size of the ELECTRICAL EXPERIMENTER, with no other matter but questions and answers. Of late the influx of letters has become so heavy that several of our associates have been forced to discontinue important editorial work, in order to answer the mail. This we are certain you do not wish. You do not want your magazine to lower its present high standard. You want the best, the very best, and you know we never have failed you yet.

Moreover the multitude of letters are wholly unnecessary. Most of the questions Readers ask every day have been answered before in "The Oracle." Therefore. ere you sit down to write us, look over your back numbers, and nine times out of ten you will find the answer.

We strive hard to publish only such matter as has not appeared before in our columns, and for that reason, only a small fraction of the queries received by us are actually publisht.

Your magazine is steadily coming to the fore as the greatest publication in the scientific world. To keep up its present high standard and to make it a better and bigger magazine requires a tremendous amount of untiring effort on the part of the Editors. Therefore, in the future, we CANNOT in your own interest, answer questions by mail, free of charge.

For questions requiring an immediate answer our fee is 25 cents for the first three ordinary questions, and 25 cents for each additional question. We will gladly advise fee for special questions entailing considerable research work or calculations.

Stamped and addrest envelope should be enclosed with the queries, and moreover, any sketches accompanying them should be drawn in ink on separate sheets. Write plain and, PLEASE, PLEASE BE BRIEF.

Editor of "The Oracle."

Concerning the disc core transformer in the Mignon coupler, so far as we understand, this disc core was either of iron or some other alloy of a ferrous nature. Apparently the designer aimed to or tried to give the impression that this form of transformer would be much more efficient than the standard radio coupler, owing to the presence of the ferrous core, which of course would give a much higher permeability, or flux carrying power.

We refer you to the March, 1917, issue of the ELECTRICAL EXPERIMENTER, page 811, where you will find complete diagrams and explanation of the Mignon adjustable disc core receiving transformer and circuits, written by Mr. Ernest Mignon, the inventor, himself.

RECORDING RADIO SIGNALS

(1007) W. T. Smith, Stockton, Kansas, wishes to know:

Q. 1. Of methods in use for recording radio-telegraphic signals.

With reference to apparatus sufficiently sensitive to record wireless signals at considerable distances, would suggest that you look over the article entitled, "Radio Amplifiers," which appeared in the November, 1918, issue of the ELECTRICAL EXPERIMENTER. A great number of different types of amplifiers are there described, and data is also given on their make-up.

Finally, we would suggest that there are two methods now in use commercially for recording wireless signals. The first one, which is employed at the Marconi Trans-Atlantic Radio Stations, utilizes two to three stage vacuum valve amplifiers, and the signals are recorded on a phonograph or "Dictaphone." The second method is that which has been used by the De Forest engineers, and this system of recording wireless messages or signals, utilizés two, three, or higher Audion amplifiers to boost the signals to a sufficient strength to operate a polarized relay. This, in turn, actuates a Morse register or tape recorder. The De Forest people have also successfully employed a Poulsen *telegraphone* for recording the signals after amplification by an Audion amplifier.

It might interest you to know that the De Forest experts have perfected a six-stage Audion amplifier with an *amplifying capacity of one million times.*

DESIGN OF PHONOGRAPH HORNS.

(1008) Howard L. Quick, Jr., Brooklyn, N. Y., wants data as follows:

Q. 1. How a large phonograph sound chamber or horn should be built?

A. 1. Relative to construction of phonograph sound box or horn, which in every case should be of some hard wood, an eminent sound authority, Prof. Dayton C. Miller, gives data as follows: The horn is best constructed of some hard wood such as maple, mahogany, hollywood or oak. The

(*Continued on page* 146)

Learn Electricity

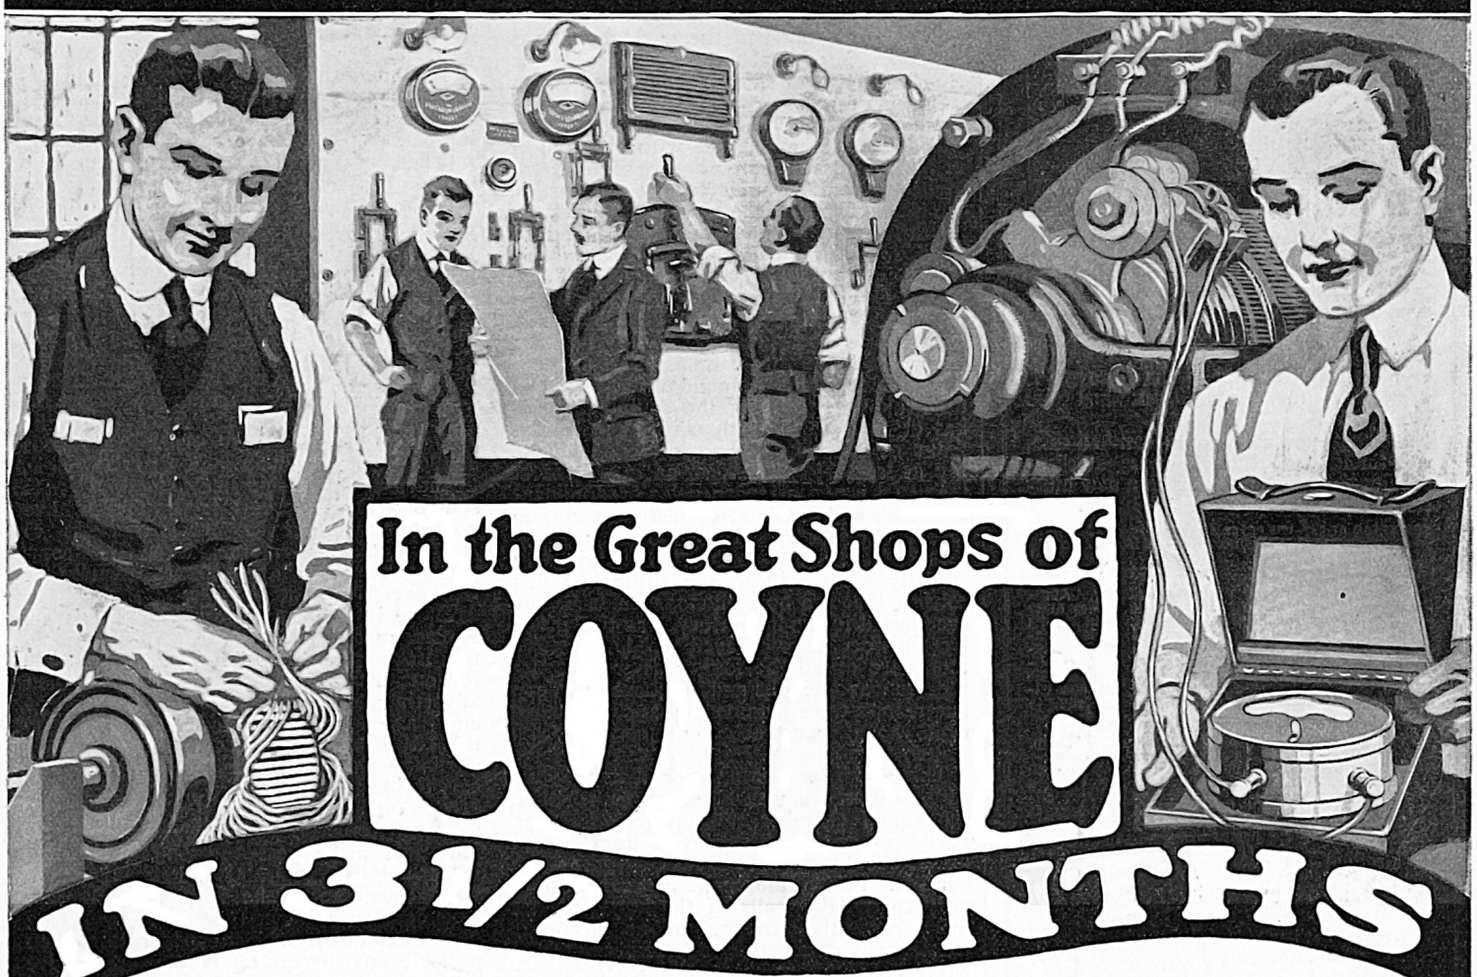

In the Great Shops of COYNE IN 3½ MONTHS

Thousands of Electrical experts are needed to help rebuild the world. Come to Chicago to the great shops of Coyne and let us train you quickly by our sure, practical way, backed by twenty years of success. Hundreds of our graduates have become experts in less than four months. *You* can do the same. *Now* is your big opportunity. Come—no previous education necessary.

Earn $125 to $300 a Month

In the Electrical business. Come here where you will be trained in these great $100,000 shops. Experts show you everything and you learn right on the actual apparatus. You work on everything from the simple bell to the mighty motors, generators, electric locomotives, dynamos, switchboards, power plants, everything to make you a master electrician. We have thousands of successful graduates. Just as soon as you have finished we assist you to a good position.

Become an Expert in 3½ Months

No need of taking from 1 to 4 years to become an expert, we have proved this in thousands of cases. The Coyne method of practical training eliminates all books, useless theory and other non-essentials and trains you in just what you need to know to become an expert.

Earn Your Way

Don't tell yourself you haven't got the money to come to Coyne. If you have ambition and the nerve of a real man, that's all you need. Dozens of our students every year work in their spare time and earn their living expenses. Dozens of others work in the day time, earn all their expense and attend our evening school. Our employment department will help you without charge.

Day or Evening Courses

Don't worry about the money. Anyone with ambition can learn here. Our tuition is low with small easy payments if desired. All tools and equipment is furnished free. Our students live in comfortable homes in the best section in Chicago—on the lake—just a few minutes' walk from our school.

Electricity, Drafting Motion Picture Operating Plumbing

We teach all these trades and professions quickly and in such a thorough, practical way that when finished you are ready to step right into a position of responsibility and big pay.

Send Today for Big Free Book

Write today, *now*, for the book. It tells what Coyne graduates have done. What you can do. Fill in the coupon, check the trade you are most interested in or send a postal card, do it *now*.

Learn Drafting

The country is crying for skilled draftsmen in all lines. Thousands of positions open with princely salaries. We give you the advantage of our big shops. No other school can do this. Now is the time to get into this big field. Experts train you under practical working conditions, no books and theory go here. Check drafting on the coupon below and mail it *at once* for full particulars.

BENNETT W. COOKE, *Director*

COYNE TRADE AND ENGINEERING SCHOOLS

Dept. 26 39-51 E. Illinois Street, Chicago, Ill.

MAIL COUPON FOR FREE BOOK NOW!

COYNE TRADE AND ENGINEERING SCHOOLS
Bennett W. Cooke, Director
Dept. 26, 39-51 E. Illinois St.
Chicago, Ill.

Please send at once your big Free Book—I am interested in
[ ] Electricity [ ] Drafting [ ] Plumbing
[ ] Motion Picture Operating
(*Check trade interested in*)

Name.....

Address.....

Health–Beauty–Power

Treat Yourself in Nature's Way

The Therapeutic White Rays of the Sterling Lamp are a scientific adaptation of the marvelous healing properties of the sun's rays. The warm, soothing, soft, white rays penetrate and vitalize every cell and tissue; new cell growth is stimulated; the body is refreshed and vitalized.

It brings you a clear, unblemished skin, rose-tinted cheeks, bright eyes; quickens the sluggish blood, rebuilds firm new muscle, and clear, new skin.

STERLING THERAPEUTIC LAMP

"The Light That Heals"

Relieves pain without destroying vitality. Absolutely safe; no vibration, shock or pain. Does away with use of harmful drugs. Relief from pain results the moment you snap the electric switch. Rheumatism, neuralgia, sore throat, earache, goitre, headache, nervous conditions, and innumerable other ailments, are instantly eased and relieved. Invaluable in the treatment of skin diseases. Physicians endorse and recommend Therapeutic Light to you.

Send Coupon for Free Book

Nothing vague or mystic in the Sterling Lamp. Our free book tells of its uses and many benefits—deals with the simple, fundamental laws of health and beauty. Tells you how to treat yourself at a few cents in cost, relieving you of pains and ailments and awakening your energy; how others in hospitals, sanitariums and thousands of private homes have benefited. Don't suffer headaches and other pains needlessly—let Nature and Science help you to health, beauty and greater vitality.

STERLING THERAPEUTIC LAMP CO.
Dept. 13, 546 Garfield Ave.
Chicago, Ill.

Use This Coupon

STERLING THERAPEUTIC LAMP CO.,
Dept. 13, 546 Garfield Ave., Chicago, Illinois.

Please send me, without cost or obligation, your fully illustrated booklet describing the Sterling Therapeutic Lamp, its uses and benefits.

Name .....

Street & No. .....

City .....State .....

PHOTO CRAFT

The New Photographic Journal Devoted to the Art of Picture Taking and Nature Work With the Camera.

The only Photographic Magazine devoting a department every month exclusively to Nature Photography.

June Issue Will Contain:

"Bird Photography", by H. T. Middleton.
"Some Strange Things From Australia."
"Nature Work With the Camera."
"Pictures in June."

and **many other** exclusive pictures and articles. Don't fail to get this issue **if you are interested in Pictures. Four Competitions with Cash prizes leading to a fifth.** Send 10c today for three months' trial subscription.

Photo Craft Magazine
Ann Arbor - - Michigan

THE ORACLE

(*Continued from page* 144)

wood for ordinary size horns may be ½ to ¾ inch stock, finished perfectly smooth inside and preferably varnished. Glue the joints and do not nail them. Mahogany is very well suited to the purpose indeed. The wood stock used should be quite thick, as the whole principle of the phonograph sound chamber is to vibrate the column of air within the chamber, and with this object in mind, and as pointed out by some of the highest scientific authorities on acoustics, the walls forming the chamber should not be thin enough to vibrate, but should be *rigid, so that the column of air can vibrate freely, and only this column of air.*

The longer the horn the better, and as the wave length in air of the average voice, such as the *baritone,* is about 4½ feet, the total mean length of the sound chamber from the reproducer should not be less than this value. Providing the sound chamber has at least this length, and that the diafram of the reproducer is large enough, say at least 2½ inches, so as to vibrate at the usual range of frequencies predominant in speech and music reproduction, then you should obtain very good results.

A high authority in the field of acoustics recently mentioned to the Editor of this column that the best phonograph music he ever heard in the laboratory, was that given from a wooden horn seven feet long, which took care of all the longer as well as the shorter wave lengths and frequencies. Very fine results were obtained from a still more rigid horn, constructed of concrete, he stated.

This authority also mentioned that a very slight difference was noted as to whether the sound chamber was made *square* or *round* in cross-section. The lines of its length should expand continually and not be parallel. Furthermore, the general contour or shape of the walls of the horn may be made perfectly straight, and no increased efficiency is obtained by any fancy frills or curves in the horn, as is claimed by many phonograph companies. Also it is a proven fact by laboratory tests, that any form of wooden grill or vane whatsoever placed in the mouth or opening of the sound chamber, only lowers the tonal and acoustic efficiency of the instrument.

With regard to needles, it is also interesting to note that tests have shown where anything softer than a steel, diamond or saffire point is used, that pure and clear sound reproduction is sacrificed, such as when fiber needles are used. Prof. Miller stated the situation very succinctly and correctly, we believe, when he said that "If you use fiber needles and like them, then use them, as they of course effect a saving in the wear on the records." The fact remains however, that any such needle as this absorbs a considerable portion of the vibrations of the music picked up from the record, and dissipates it before it ever reaches the diafram. The same reasoning applies to many other fancy attachments offered to the phonograph public.

A. C. MOTOR STARTING COIL CONNECTIONS.

(1009) G. S. Golden, Harrisburg, Pa., writes:

Q. 1. How do you connect up the starting coils on an A. C. single phase induction motor?

A. 1. We give herewith diagram of connections for the four starting coils on your A. C. motor. The current must flow around the successive poles in an opposite direction,

(*Continued on page* 148)

Advertising Talks
NUMBER 3

LAST month I showed you how necessary it was to the life and growth of a big magazine like the ELECTRICAL EXPERIMENTER to have a large number of satisfied advertisers, and explained how more advertisers meant a bigger magazine for you and more reading matter. This month I want to give you a few more reasons why it is worth your while to patronize firms who advertise, and especially those who advertise in the EXPERIMENTER.

When you pay your good money for some article, no matter what it is, you want to get the very best quality possible for the money. Advertised articles are always of better quality than unknown, unlabeled, and unbranded goods. This is easily proven. Compare such well-known brands as the Sonora Phonographs, Starrett Tools, Brandes or Murdock Receivers, etc., with similar articles put out by firms who have not the ambition or progressiveness to standardize their merchandise. The comparison always proves the superiority of the advertised article.

There is a good reason why this is so. It costs money to advertise. An inch ad in the ELECTRICAL EXPERIMENTER costs $8.40 for one insertion—a page ad $264.60. An advertiser who is using ten or twelve magazines and spending anywhere from $1,000 to $10,000 a month to tell you about the goods he has for sale, must get his money back by keeping you as a steady customer. It costs too much to make the first sale to drop your friendship then and there. He must make you a strong booster of what he has to sell, and keep you a steady customer if he is to make money. The only way he can do it is by giving you better quality and a cheaper price than possible anywhere else. If he doesn't give you a better article and save you money you won't remain a steady customer and he loses.

Therefore, when an advertiser spends a small fortune each year to build up a reputation, don't think for a single moment that he is going to risk that reputation or run the chance of having his money thrown in the gutter by putting out inferior goods. Far from it! The advertiser lays his cards on the table. He says, "Here's who I am, and what I am and what I have to sell you." He is frank with you. He does not try to "stick" you. He cannot afford to.

When you send your orders to any concern which advertises in the ELECTRICAL EXPERIMENTER you know that you are sending them to a reliable firm (we do not accept advertising orders from any concern except those that we know are reliable.) You will know that the goods which you will get are the best that you could buy for the money. You will know that the advertiser stands back of his goods and is willing to make good if any dissatisfaction should arise.

I have given you only a few reasons why it is a business proposition for an advertiser to give better service, put out a better quality of goods, and offer you more for the money than you would get from a non-advertiser. There are many others. Next month I will take up the matter of costs and prices and show you just how the advertiser can sell goods more cheaply than his competitor.

Advertising Manager.

How to Increase Your Will Power In One Hour

Author of This Article Tells How He Quickly Acquired a Dominating Will Power That Earns Him Between $50,000 and $70,000 a Year

FOUR YEARS ago a man offered me a wonderful bargain. He was hard up for money and wanted to sell me some shares in a young, growing company for $1,000. Based on the earnings of the Company the stock offered me was easily worth $5,000—in fact, the man who finally bought the shares sold them again in five months *at a profit of* $4,300.

The reason I didn't buy the shares was that I could no more raise a thousand dollars than I could hop, skip, and jump across the Atlantic Ocean. A thousand dollars! And my income only twenty-five a week.

The second chapter in my life began a few months later, when another opportunity came to me. It required an investment of $20,000 during the first year. I raised the money easily, paid back every penny I borrowed, and had $30,000 left at the end of the first year! To date in less than four years, my business has paid me a clear profit of over $200,000 and is now earning between $50,000 and $70,000 a year. *Yet for twelve years before, the company had been losing money every year!*

The natural question for my reader to ask is, "How could you borrow $20,000 to invest in a business which had previously been a failure, after being unable to borrow $1,000 for an investment that seemed secure?" It is a fair question. And the answer can be given in two little words—*WILL POWER.*

When the first proposition came to me I passed it by simply because I didn't have the money and couldn't borrow it. I went from one friend to the next and all turned me down. Several refused to talk business with me at all. They all liked me personally, and they asked about the kiddies, but when it came to money matters I hadn't a chance. I was scared stiff every time I talked to one of them. I pleaded with them, almost begged them. But everybody had their "money all tied up in other investments." It was an old excuse, but I accepted it meekly. I called it hard luck. But I know today that it was nothing in the world except my lack of Will Power or rather my weak Will Power, which kept me from getting what I wanted.

Partial List of Contents

The Law of Great Thinking.
The Four Factors on which it depends.
How to develop analytical power.
How to think "all around" any subject.
How to throw the mind into deliberate, controlled, productive thinking.
Detailed directions for Perfect Mind Concentration.
How to acquire the power of Consecutive Thinking, Reasoning, Analysis.
How to acquire the skill of Creative Writing.
How to guard against errors in Thought.
How to drive from the mind all unwelcome thoughts.
How to follow any line of thought with keen, concentrated Powers.
How to develop Reasoning Power.
How to handle the mind in Creative Thinking.
The secret of Building Mind Power.
How the Will is made to act.
How to set your Will.
How a strong Will is Master of Body.
What creates Human Power.
The Six Principles of Will Training.
Definite Methods for developing Will.
The NINETY-NINE METHODS for using Will Power in the Conduct of Life.
Seven Principles of drill in Mental, Physical, Personal Power.
FIFTY-ONE MAXIMS for Applied Power of Perception, Memory, Imagination, Self-Analysis, Control.
How to develop a strong, keen gaze.
How to concentrate the eye upon what is before you—object, person, printed page, work.

These are only a few of the many subjects treated.

When I heard that the man sold those shares at a profit of $4,300, it seemed that my sorrow could not be greater. That profit was just about what my salary amounted to for four years! But instead of grieving over my "hard luck," I decided to find out why I was so easily beaten in everything I tried to accomplish. It must be that there was something vital that made the difference between success and failure. It wasn't lack of education, for many illiterate men become wealthy. What was this vital spark? What was this one thing which successful men had and which I did not have?

I began to read books about psychology and mental power. But everything I read was too general. There was nothing definite—nothing that told me *what to do.*

After several months of discouraging effort, I finally encountered a book called "Power of Will," by Prof. Frank Channing Haddock. The very title came to me as a shock. When I opened the book I was amazed. I realized that will power was the vital spark—the one thing that I lacked. And here in this book were the very rules, lessons and exercises through which anyone could increase their will power. Eagerly I read page after page; including such articles as The Law of Great Thinking; How to Develop Analytical Power; How to Concentrate Perfectly; How to Guard Against Errors in Thought; How to Develop Fearlessness; How to Acquire a Dominating Personality.

An hour after I opened the book I felt like a new person. My sluggish will power was beginning to awaken. There was a new light in my eye, a new spring in my step, a new determination in my soul. I began to see, in my past, the many mistakes I had made, and I knew I would never make them again.

I practiced some of the simple exercises. They were more fascinating than any game of cards or any sport.

Then came an opportunity to acquire the business which had lost money for twelve years, and which I turned into a $50,000 a year money maker. Instead of cringing before the moneyed people, I won them over by my sheer force of will. I would not be denied, and my every act and word since then has been the result of my training in will power.

I am convinced that every man has within himself every essential quality of success except a strong will. Any man who doubts that statement need only analyze the successful men he knows, and he will find himself their equal, or their superior, in every way except in will power. Without a strong will, education counts for little, money counts for nothing, opportunities are useless.

I earnestly recommend Prof. Haddock's great work. "Power of Will," to those who feel that success is just out of reach—to those who lack that something which they cannot define, yet which holds them down to the grind of a small salary.

Never before have business men and women needed this help so badly as in these trying times. Hundreds of real and imaginary obstacles confront us every day, and only those who are masters of themselves and who hold their heads up will succeed. "Power of Will" as never before is an absolute necessity—an investment in self-culture which no one can afford to deny himself.

I am authorized to say that any reader who cares to examine "Power of Will" for five days may do so without sending any money in advance. If after one hour you do not feel that your will power has increased, and if after a week's reading you do not feel that this great book supplies that one faculty you need most to win success, return it and you will owe nothing. Otherwise send only $3, the small sum asked.

Some few doubters will scoff at the idea of will power being the fountain head of wealth, position and everything we are striving for, but the great mass of intelligent men and women will at least investigate for themselves by sending for the book at the publisher's risk. I am sure that any book that has done for me—and for thousands of others—what "Power of Will" has done—is well worth investigating. It is interesting to note that among the 250,000 owners of "Power of Will" are such prominent men as Supreme Court Justice Parker; Wu Ting Fang, Ex-U. S. Chinese Ambassador; Gov. McKelvie, of Nebraska; Assistant Posmaster-General Britt; General Manager Christeson, of Wells-Fargo Express Co.; E. St. Elmo Lewis; Senator Arthur Capper of Kansas and thousands of others. In fact, today "Power of Will" is just as important, and as necessary to a man's or woman's equipment for success, as a dictionary. To try to succeed without Power of Will is like trying to do business without a telephone.

As your first step in will training, I suggest immediate action in this matter before you. It is not even necessary to write a letter. Use the form below, if you prefer, addressing it to the Pelton Publishing Company, 30 K Wilcox Block, Meriden, Conn., and the book will come by return mail. You hold in your hand, this very minute, the beginning of a new era in your life. Over a million dollars has been paid for "Power of Will" by people who sent for it on free examination. Can you, in justice to yourself hesitate about sending in the coupon? Can you doubt, blindly, when you can see, without a penny deposit, this wonder-book that will increase your will power in one hour.

The cost of paper, printing and binding has almost doubled during the past three years, in spite of which "Power of Will" has not been increased in price. The publisher feels that so great a work should be kept as low-priced as possible, but in view of the enormous increase in the cost of every manufacturing item, the present edition will be the last sold at the present price. The next edition will cost more. I urge you to send in the coupon now.

PELTON PUBLISHING COMPANY

30-K Wilcox Block, Meriden, Conn.

I will examine a copy of "Power of Will" at your risk. I agree to remit $3 or remail book in 5 days.

Name.....

Address.....

City.....State.....



They replace steel phonograph needles!

SONORA Semi-Permanent Silvered Needles are for use on ALL MAKES of steel needle records. They play 50 to 100 times, mellow the tone, are more economical, more convenient, save constant needle changing, and increase the life of the records.

THE INSTRUMENT OF QUALITY
Sonora
CLEAR AS A BELL

Semi-Permanent Silvered
NEEDLES

Study these microphotographs, Fig. A shows an ordinary steel needle after playing one record. Notice that the point is worn off. Fig. B shows Sonora Needle after playing one record. No wear is perceptible. Fig. C shows Sonora Needle after playing over 50 records. Needle has worn down, but is still in splendid playing condition.

3 Grades: Loud—Medium—Soft
30c per card of 5. In Canada 40c.

FREE Sample Sonora Needle will be sent FREE on request. Write for it *today*. Note how many times it plays.

Sonora Phonograph Sales Company, Inc.
GEORGE E. BRIGHTSON, PRESIDENT
279 Broadway, *Dept. G*, New York
Toronto: Ryrie Building

CAUTION! Beware of similarly constructed needles of inferior quality

Send Only 12c
(Stamps or Coin)

And I will send you a copy of my valuable booklet.

"Hints to Music Loving Owners of Talking Machines"

Tells you how to take care of your machine and records, preserve the life of both, and gives many pointers to improve the tone of your instrument and increase your enjoyment of it. Instructs on the care of the motor, cleaning, speed adjusment, care of the needles—in fact every thing you should know. Send 12c today and the booklet will come by return mail.

J. H. ELLIS, Box 882, Milwaukee, Wis.
Patentee & Manufacturer, Ellis Harmonious Reproducer

You Can *RENT* This Phonograph

on our new plan! $10 puts this **Young's Superior Phonograph** in your home on **30 Days' Trial!** Plays all makes of disc records. Cabinet size, 47 ins. high. *Rental applies on purchase.* **$125 Value for $62.50.** Write for details of greatest phonograph bargain ever offered. **Offer Limited. Write Today.**

YOUNG'S SUPERIOR PHONOGRAPH
62 W. Madison St. Dept. P26. Chicago, Ill.

Get This Car

And the AGENCY In YOUR Territory

Drive a new 1919 Birch SUPER-FOUR and make good money selling Birch cars to your friends and neighbors. They are fully guaranteed. Prompt shipments. Write quick for full information.

BIRCH MOTOR CARS Dept. 625 81 E. Madison St. CHICAGO - ILLINOIS

The Oracle

(*Continued from page* 146)

as the diagram shows. Those you show in your letter are not correct, for they give like polarity on each pole, which is wrong. We have no data on the starting coil dimensions, but you can arrive at this by experiment, or else by getting in touch with the manufacturers of a similar sized motor.

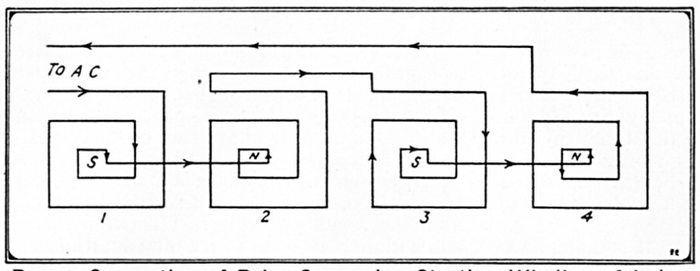

Proper Connection of Poles Composing Starting Winding of Induction Motor.

SPECIAL 110 VOLT TO 12 VOLT A. C. TRANSFORMER.

(1010) August Kling, Mobile, Ala., writes:

Q. 1. Asking for data on building a small step-down transformer to give 12 volts at the secondary, which he desires split into two coils. Total output 50 watts.

A. 1. We give herewith data on double wound closed core transformer to step-down 110 volts 60 cycle A. C. to a maximum secondary voltage of 12 volts.

The laminated sheet iron core for this transformer may measure 5 inches wide by 6 inches long, and have a cross-section of 1 inch by ½ inch. At either end of the two longer legs, as the diagram herewith shows, two primary windings may be placed, each of them consisting of 200 turns of No. 18 D. C. C. magnet wire. At either end of the two long legs, the two secondary windings may be placed, as the diagram shows, each of these developing about 12 volts and about 2 amperes, or giving 12 volts and 4 amperes or 50 watts, the total output you request for both secondaries connected in parallel. It is understood that both primaries in this design are to be connected in series on 110 volt 60 cycle A. C. at all times, i.e., whenever the transformer is used. The secondary windings each consist of 45 turns No. 12 B. & S. gage D. C. C. magnet wire, the secondary being wound on either leg beside the primary coil.

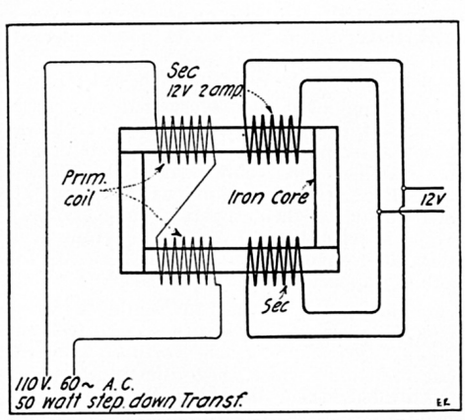

Details of 110-Volt to 12-Volt A. C. Transformer. Secondary Coils May Be Connected in Parallel or in Series.

With respect to taking off taps on the secondary for different voltages, you can easily divide up the total number of turns on the secondary yourself by means of a small battery voltmeter. You can readily test the potential by experiment. The voltage in any case is directly proportionate to the number of turns in use.

100-WATT, 32 TO 8-VOLT STEP-DOWN TRANSFORMER.

(1011) Claude Carefoot, Pasqua, Sask., Canada, inquires:

Q. 1. For data on step-down transformer to reduce 32 volts to 8 volts, A. C.

A. 1. We do not of course know how many watts you wish the transformer to carry, but we give you herewith data on a 100-watt transformer. The laminated sheet iron core may be about 8″ long by 6″ wide and thickness of 1″. The core should have a cross-section of 1 square inch. The primary winding, on one leg of the transformer, should consist of 230 turns of No. 11 D.C.C. magnet wire.

The secondary winding should have 58 turns of No. 5 D.C.C. magnet wire.

My Inventions

By Nikola Tesla

(*Continued from page* 112)

any special thought of our far more imperative necessities. The "Magnifying Transmitter" was the product of labors extending through years, having for their chief object the solution of problems which are infinitely more important to mankind than mere industrial development.

If my memory serves me right, it was in November, 1890, that I performed a laboratory experiment which was one of the most extraordinary and spectacular ever recorded in the annals of science. In investigating the behaviour of high frequency currents I had satisfied myself that an electric field of sufficient intensity could be produced in a room to light up electrodeless vacuum tubes. Accordingly, a transformer was built to test the theory and the first trial proved a marvelous success. It is difficult to appreciate what those strange phenomena meant at that time. We crave for new sensations but soon become indifferent to them. The wonders of yesterday are today common occurrences. When my tubes were first publicly exhibited they were viewed with amazement impossible to describe. From all parts of the world I received urgent invitations and numerous honors and other flattering inducements were offered to me, which I declined.

In Faraday's Chair

But in 1892 the demands became irresistible and I went to London where I delivered a lecture before the Institution of Electrical Engineers. It had been my intention to leave immediately for Paris in compliance with a similar obligation, but Sir James Dewar insisted on my appearing before the Royal Institution. I was a man of firm resolve but succumbed easily to the forceful arguments of the great Scotchman. He pushed me into a chair and poured out half a glass of a wonderful brown fluid which sparkled in all sorts of iridescent colors and tasted like nectar. "Now," said he, "you are sitting in Faraday's chair and you are enjoying whiskey he used to drink." In both aspects it was an enviable experience. The next evening I gave a demonstration before that Institution, at the termination of which Lord Rayleigh addressed the audience and his generous words gave me the first start in these endeavors. I fled from London and later from Paris to escape favors

(*Continued on page* 173)

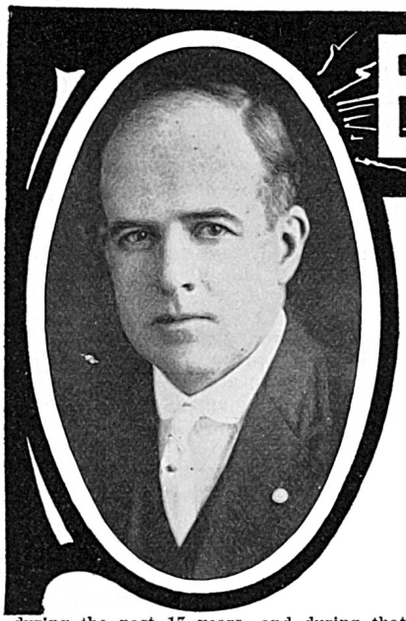

ELECTRICITY

Taught By A Practical Man

and In Your Home.

IT IS UP TO YOU.

I am teaching electricity and drafting to many men, young and old, and wish to interest you sufficiently so that you will send for my catalog which tells the whole story regarding my method of instruction and the good which is being accomplished. It is up to you whether you look into this proposition, but if you are in earnest in your desire to get into the electrical industry, or to become more proficient in that line, you will send for my catalog and not regret the time you give in doing so.

THE PURPOSE OF THE COURSE OF STUDY

I have been designing courses in electrical instruction and teaching electricity, off and on, during the past 17 years, and during that time I have had an unusual opportunity to make a special study of the teaching business, from the standpoint of a practical man. This course has been designed by me with a view of reaching those who do not have a lot of time and money to devote to study work and to give them as thorough a knowledge as possible of electricity as applied to every day practical work. The instruction is given like you were working on various jobs and I tell you what to do and how to do it, giving the necessary explanation for the understanding of the theory covered by the subject under discussion. Another particular feature of my instruction is that I lay particular stress on the unusual conditions which seldom happen in the every day run of electrical work, and this part of the instruction makes the course attractive and valuable to those already engaged in the electrical industry and accounts for the fact that over 60 per cent of my students are practical men.

FIFTY-FIFTY

I work absolutely on a 50-50 basis with my students and my method of handling their instruction and my dealings with them have never been criticised. You pay me the comparatively low price I ask and I give you the instruction and other help as stated in my catalog. No student is permitted to pay cash for his entire course on starting, the course being paid for in small monthly payments as you go along. Students have the privilege of discontinuing the work if they should find that it was not just what they were after and their payments stop at the same time. This is my way of doing business and a part of my 50-50 plan, as I would not want your money when I was not giving you the instruction.

Apparatus, Instruments, Materials, Etc.

Certain electrical apparatus, instruments, materials, charts, drafting materials, etc., as described in the catalog, are included as a part of the course for which there is no extra charge, as it is covered by the regular monthly payments.

Fill Out Coupon Or Drop Me A Postal Card For One Of My Catalogs Which Gives Full Information.

BURGESS ELECTRICAL SCHOOL

745 E. 42d Street **Chicago, Ill.**

YORKE BURGESS,
BURGESS ELECTRICAL SCHOOL,
745 East 42nd Street, Chicago, Illinois.

Gentlemen:—
Send me catalog describing your course in Electricity and Drafting.

NAME .....
ADDRESS .....
CITY .....
STATE .....

To Practical Men and Electrical Students:

(See review of this book by Editor in December issue of your Electrical Experimenter, page 568)

I have prepared a pocket-size note book especially for the practical man and those who are taking up the study of electricity. It contains drawings and diagrams of electrical machinery and connections, over two hundred formulas for calculations, and problems worked out showing how the formulas are used. This data is taken from my personal note book, which was made while on different kinds of work, and I am sure it will be found of value to anyone engaged in the electrical business.

The drawings of connections for electrical apparatus include Motor Starters and Starting Boxes, Overload and Underload Release Boxes, Reversible Types, Elevator Controllers, Tank Controllers, Starters for Printing Press Motors, Automatic Controllers, Variable Field Type, Controllers for Mine Locomotives, Street Car Controllers, Connections for reversing Switches, Motor and Dynamo Rules and Rules for Speed Regulation. Also, Connections for Induction Motors and Starters, Delta and Star Connections and Connections for Auto Transformers, and Transformers for Lighting and Power Purposes. The drawings also show all kinds of lighting circuits, including special controls where Three and Four Way Switches are used.

The work on Calculations consists of Simple Electrical Mathematics, Electrical Units, Electrical Connections, Calculating Unknown Resistances, Calculation of Current in Branches of Parallel Circuits, How to Figure Weight of Wire, Wire Gauge Rules, Ohm's Law, Watt's Law, Information regarding Wire used for Electrical Purposes, Wire Calculations, Wiring Calculations, Illumination Calculations, Shunt Instruments and How to Calculate Resistance of Shunts, Power Calculations, Efficiency Calculations, Measuring Unknown Resistances, Dynamo and Dynamo Troubles, Motors and Motor Troubles, and Calculating Size of Pulleys.

Also Alternating Current Calculations in finding Impedance, Reactance, Inductance, Frequency, Alternations, Speed of Alternators and Motors, Number of Poles in Alternators or Motors, Conductance, Susceptance, Admittance, Angle of Lag and Power Factor, and formulas for use with Line Transformers.

The book called the "Burgess Blue Book" is published and sold by the Burgess Engineering Company for one dollar ($1.00) per copy, postpaid. If you wish one of the books, send me your order with a dollar bill, check or money order. I know the value of the book and can guarantee its satisfaction to you by returning your money if you decide not to keep it after having had it for five days.

BURGESS ENGINEERING CO., Yorke Burgess, *Consulting Engineer*
750 East 42nd Street Chicago, Illinois

BOYS

Learn Drafting

Employers everywhere are looking for skilled draftsmen. They are offering good salaries to start with splendid chances for advancement.

Drafting offers exceptional opportunities to a young man because drafting itself not only commands good pay, but it is the first step toward success in Mechanical or Structural Engineering or Architecture. And drafting is just the kind of work a boy likes to do. There is an easy delightful way in which you can learn right at home in spare time. For 27 years the International Correspondence Schools have been giving boys just the training they need for success in Drafting and more than 200 other subjects. Thousands of boys have stepped into good positions through I. C. S. help, but never were opportunities so great as now.

Let the I. C. S. help *you*. Choose the work you like best in the coupon, then mark and mail it. This doesn't obligate you in the least and will bring you information that may start you on a successful career. This is your chance. Don't let it slip by. Mark and mail this coupon now.

TEAR OUT HERE

INTERNATIONAL CORRESPONDENCE SCHOOLS
BOX 6190, SCRANTON, PA.

Explain, without obligating me, how I can qualify for the position, or in the subject, *before* which I mark X.

☐ MECHANICAL DRAFTING	☐ SALESMANSHIP
☐ STRUCTURAL DRAFTING	☐ ADVERTISING
☐ SHIP DRAFTING	☐ Show Card Writer
☐ ELECTRICAL DRAFTING	☐ Sign Painter
☐ ARCHITECTURAL DRAFTING	☐ ILLUSTRATING
☐ SHEET METAL DRAFTING	☐ Cartooning
☐ BOILERMAKER DRAFTING	☐ BOOKKEEPER
☐ BRIDGE DRAFTING	☐ Stenographer and Typist
☐ MACHINE DESIGN	☐ Cert. Public Accountant
☐ ELECTRICAL ENGINEER	☐ TRAFFIC MANAGER
☐ Electric Lighting and Railways	☐ Railway Accountant
☐ Electric Wiring	☐ GOOD ENGLISH
☐ Telegraph Engineer	☐ Teacher
☐ Telephone Work	☐ Common School Subjects
☐ MECHANICAL ENGINEER	☐ Mathematics
☐ Machine Shop Practice	☐ CIVIL SERVICE
☐ Gas Engine Operating	☐ Railway Mail Clerk
☐ CIVIL ENGINEER	☐ AUTOMOBILE OPERAT'G
☐ Surveying and Mapping	☐ Auto Repairing
☐ STATIONARY ENGINEER	☐ PLUMBING AND HEATING
☐ Marine Engineer	☐ Textile Overseer or Supt.
☐ ARCHITECT	☐ CHEMIST
☐ Contractor and Builder	☐ Navigation ☐ Spanish
☐ Concrete Builder	☐ AGRICULTURE ☐ French
☐ Structural Engineer	☐ Poultry Raising ☐ Italian

Name_____
Present Occupation_____
Street and No. _____
City_____ State_____

FREE



$20
Violin, Hawaiian Guitar
Ukulele, Guitar, Mandolin, Cornet or Banjo

Wonderful new system of teaching note music by mail. To first pupils in each locality, we'll give a $20 superb Violin, Mandolin, Ukulele, Guitar, Hawaiian Guitar, Cornet or Banjo absolutely free. Very small charge for lessons only expense. We guarantee success or no charge. Complete outfit free. Write at once—no obligation.
SLINGERLAND SCHOOL OF MUSIC, Dept. 422, CHICAGO, ILL.

GO INTO MOVING PICTURE BUSINESS
Small Capital Starts You
Our Catalog FREE. Show you how to earn $25.00 to $50.00 per day
on our easy payment plan. Begin now and get your share. We sell everything. Write today.
Atlas Moving Picture Co.
Dept. 49 538 S. Dearborn St., Chicago

How to Build an Efficient Medical Coil Set

(*Continued from page* 125)

The tin foil and paraffined paper condenser used with this coil for intensifying the current for shocking purposes, etc., may be composed of about forty sheets of tin foil measuring 3x4 inches, each foil leaf separated with a layer of paraffined paper. Alternate sheets are connected together to form a terminal, and the condenser is finally connected up with the switch, as shown in Fig. 1, so that it can be cut in or out of circuit as desired.

Wooden Cabinet.

The cabinet proper, housing the two dry cells and the medical coil with control switches, in the case of the writer was made of some ¼-inch pine obtained from some old boxes. To further explain, and after considerable experience in building apparatus of this and kindred sorts, experience dictates that it is best not to bother with any elaborate wooden outer cabinets, but to make it more rugged by housing the apparatus and coils in a small dress-suit case. The author purchased one of these for $2.00, which filled the bill perfectly, the case being made of fiber with a good lock and hasp, reinforced corners and leather handle. The case measured 14 inches long by 8¾ inches in width and 4¾ inches in depth. Before building the cabinet, therefore, and providing you intend to enclose the apparatus in a case of this kind, which may be purchased at any trunk and bag store, you should ascertain the dimensions of the case beforehand, so that the cabinet will fit into it properly. As becomes apparent from Fig. 3, the top of the cabinet is the only part that shows when the case is open, and therefore it will be evident that the bottom can be made of pine and given a coat of black shellac or black coach varnish. The battery cover in the author's instrument is made of polished mahogany, being one-half of a mahogany base which originally belonged to an obsolete wireless instrument and a strip of polished mahogany was used for the central upright alongside the induction coil. The main switch panel which supports the coil of the condenser switch and the twelve points, also the secondary switch, is best made of either black fiber, polished hard rubber or bakelite. As the switch contacts are quite close together, and potentials of several hundred volts are carried thru adjacent contacts.

The battery compartment cover is held in place by means of four eye hooks, which can be purchased for a few cents at any hardware store, and as the experimenter has never yet been born, to the writer's mind, who has not wanted to use the battery which he has just locked up in a cabinet, provision is made so that the battery in this cabinet can be used at any time without having to open the compartment. For this purpose two auxiliary battery terminals or binding posts are placed on the side of the battery switch as Figs. 1 and 2 show.

Miscellaneous.

All of the connections under the panel supporting the apparatus as well as the battery connections are best made with rubber-covered flexible conductor about No. 18 B. & S. gage capacity. At Fig. 6 there are shown details for making the two metal handles, as well as a sponge electrode for treatment with saline solutions (salt water). The handles, if they are to be made instead of purchased, are very well composed of two lengths of brass tubing of about ¾-inch outside diameter by 3½ inches long. Each of these handles should be plugged up by a thick brass washer or a piece of ⅜ brass turned to make a driving fit in the tube, and which may be afterward sweated with solder so as to make a smooth tight joint which cannot be noticed, especially when the handles are afterward nickel plated. Thru the center of the plug a No. 8-32 tap hole should be drilled and threaded, into which a binding post may be secured or else a wooden handle as shown in the detail sketch, Fig. 6, may be utilized. This handle is turned up from some hard wood and given a coat of black shellac, and in the smaller end of the handle there is tightly fitted a piece of No. 8-32 screw. A small hole may be drilled crosswise thru the screw near the wood thru which the cord tip may be placed to make connection when it is used.

This wooden handle is very essential when the sponge electrode is employed, when it is screwed into the threaded shoulder in this electrode. To make the sponge electrode you will require a small piece of soft sponge about ½ inch thick which is sewed or laced with some heavy thread to the brass disc shown at Fig. 6. When using this electrode it is dipt into a salt water solution and applied over the part affected, such as a stiff muscle or cord, the patient holding the other handle in the hand, etc. The positive and negative poles of a faradic current as delivered at the binding post terminals, H and H^1, is readily determined by means of a polarity indicator, and the writer has successfully used very often one of the pole test paper indicators available on the market. This paper is dampened when it is to be used for determining polarity. Some of the papers turn red at the negative pole, and others turn red at the positive pole.

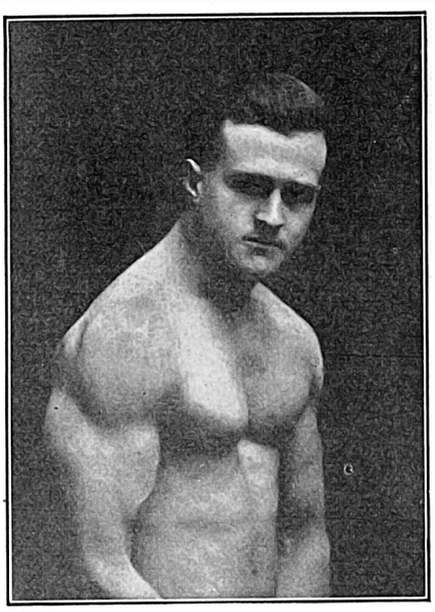

Earle Liederman
THE ACME OF PHYSICAL PERFECTION

Send for my latest book
"MUSCULAR DEVELOPMENT"

It will tell you how you can get ROBUST HEALTH, GREAT STRENGTH, ABUNDANCE OF VITALITY and a HIGHLY DEVELOPED BODY. Beautifully illustrated with photographs of myself and of some of the world's strongest men whom I have trained.

Send 10c for a copy TODAY—NOW—while it is on your mind.

EARLE E. LIEDERMAN
Dept. 209, 203 Broadway, New York City

Paris Letter

(*Continued from page* 119)

tributed and is interrupted in a certain rhythmic manner, which thus gives alternating periods of rest and work to the actuated muscles. The application of the current is made by large metallic surfaces, the electrodes covering the entire muscular region under treatment. The method of application of these electrodes is carefully supervised by the physician in order to get the best results. The large surface electrodes overcome to a great extent the high resistance of the skin, and also renders it certain that the patient does not experience any disagreeable sensation.

There is no nervous fatigue. The patient himself is unconscious of this gymnastic, passive *ergotherapy;* he experiences no shocks nor any disagreeable twitching. There is no muscular fatigue; the muscles are strengthened immediately; particularly the abdominal muscles are greatly benefited. The local circulation is highly stimulated. The motor functions of the muscles rapidly emerge from their impotency.

Our photographs were taken at the Grand-Lebrun Hospital at Bordeaux, Prof. Bergonié himself being in charge of the same. One of the photographs shows one of the electro-therapeutic wards while the faradization is taking place. It is interesting to watch the patients while they undergo the treatment. They seem to be unconscious of the effect of the current, but their muscles are working overtime. Our *Poilus* continue reading their newspapers and magazines as if they were actually enjoying a pleasant rest. The treatment extends for two hours in the morning and two in the evening, but in some cases the treatment is decreased or increased as becomes necessary, all depending on the specific cases. In one of our photographs we see a *poilu,* suffering from a fracture of the leg bones and the loss of his calve muscles, who was enabled to walk again without difficulty within fifteen days.

EXPERIMENTS IN RADIO ACTIVITY.

(*Continued from page* 123)

an undisputed footing to the atomic theory and has helped to solve many problems which have been puzzling the scientists for years.

Of course this series is only a beginning and the experimenter wishing to continue should procure a standard work on the subject such as Rutherford's justly famous "Radio-active Substances and Their Radiations." It is hoped by the author that these articles have begot an interest in this far-reaching and fascinating study.

(*Conclusion*)

WIRELESS SIGNALS HEARD THREE-QUARTERS OF A MILE.

As considerable discussion is often heard among radio men, both Professional and Amateur, as to the distance over which an amplified radio signal has been heard, it may be of interest to mention in this connection that Dr. Louis W. Austin of the U. S. Naval Radio-Telegraphic Laboratory states in a recent letter to the Editors that he has often heard incoming radio signals amplified by means of *standard* radio apparatus so as to be audible for from *½ to ¾ mile!* He also states that he believes it possible to amplify phonograph music or speech thru the aid of a standard audion amplifier having several stages and loud talking attachment, so that the music could be heard over a distance of a mile or more.

Make a Bigger Income
Learn Draftsmanship

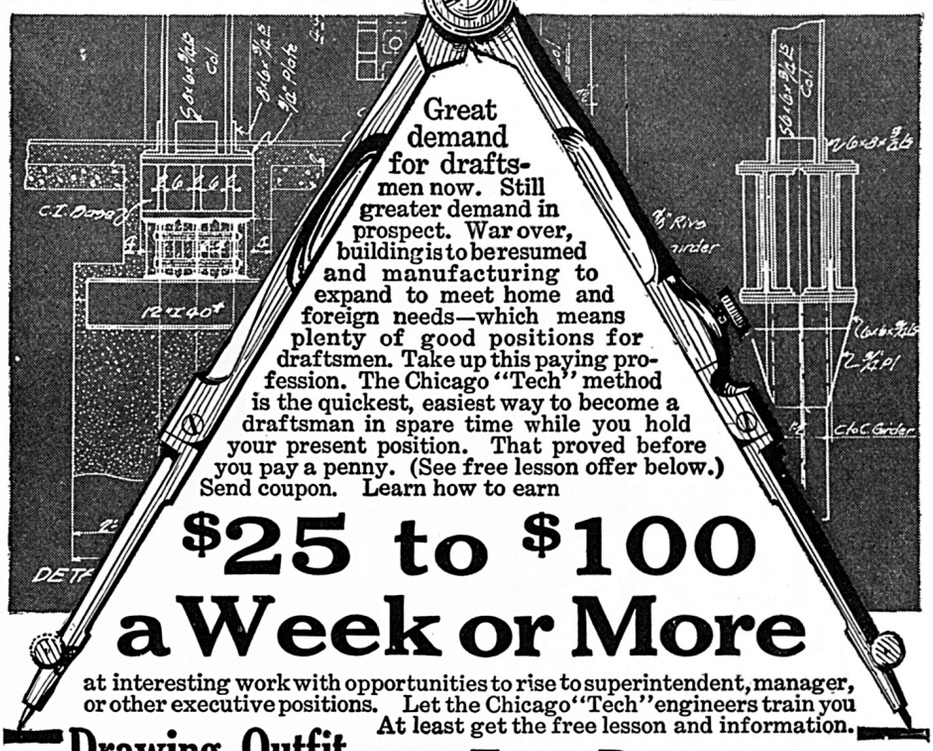

Great demand for draftsmen now. Still greater demand in prospect. War over, building is to be resumed and manufacturing to expand to meet home and foreign needs—which means plenty of good positions for draftsmen. Take up this paying profession. The Chicago "Tech" method is the quickest, easiest way to become a draftsman in spare time while you hold your present position. That proved before you pay a penny. (See free lesson offer below.) Send coupon. Learn how to earn

$25 to $100 a Week or More

at interesting work with opportunities to rise to superintendent, manager, or other executive positions. Let the Chicago "Tech" engineers train you At least get the free lesson and information.

Drawing Outfit

(No Extra Charge)

Every student of the Chicago "Tech" Home Study Course in Draftsmanship receives this drawing outfit—set of instruments in case, drawing board, T square, triangles, scale, curve, drawing paper, pencils, etc., or a cash credit in case he already has an outfit. You use them while learning.—then take them right into your practical work.

NOTE: Enrolled with Chicago "Tech" you have the personal direction of practical engineers, builders and architects who teach you the methods they use in their own work. No useless theories, no time wasted. You are prepared to stand beside old, experienced men. Big advantage to learn from a staff like this—every man a specialist.

Come To the College or TRAIN at HOME

Wherever you are you can have this Chicago "Tech" training. Complete instruction by mail. Exercises, lessons, personal direction of our experts right in your own home if you cannot come to the college for a resident course. Send the coupon and get the facts.

Easy Payments

The fees for Chicago "Tech" courses are very moderate—and you can pay on easy terms. And also—you can obtain in a few months what it would take several years to acquire by ordinary methods. You can get an early start. You are soon ready to take a paying position and to quickly get back the cost of your course.

FREE TEST LESSON

Other institutions ask you to pay first—and then to find out later how well qualified you are for this profession. We send the free lesson first and place you under no obligation at all. Discover your qualifications before you pay anything. And see for yourself just what Chicago "Tech" offers you in training which will bring a ready market for your services and open opportunities which are closed to the untrained man. The coupon will bring all the facts about the course, the small fee, and the easy terms.

Auto and Gas Engine Course

All about automobile mechanism—its construction, operation and REPAIR—taught by mail. You train directly under the Chicago "Tech" automobile experts. Splendid opportunities open now.

Learn All This in Spare Time

All about the Principles of the Automobile.
All about Gasoline Engines.
All about Power Plants and Transmissions.
All about Carburetors and Fuel Supply Systems.
All about Lubrication and Cooling.
All about Batteries.
All about Magneto Ignition.
All about Starting and Lighting Systems.

Know How To Fix Troubles

Most complete instruction in auto repair work. Equips you for high pay or to start a business. Big demand for trained repair men.

Write Send the coupon and get catalog and all information now.

Mark with X the branch you are interested in—or if in doubt about which course to take, write a letter stating facts about yourself and asking our advice which will be freely given. Mail either the coupon or the letter today.

CHICAGO TECHNICAL COLLEGE,
645 Chicago "Tech" Building, Chicago

Without obligation upon me, send your Catalog on subject indicated below. Also FREE Lesson if inquiry is on Drafting or Plan Reading. Mark X opposite work in which you are especially interested.

- ☐ Architectural Drafting
- ☐ Machine Drafting
- ☐ Electrical Drafting
- ☐ Structural Drafting
- ☐ Sheet Metal Drafting
- ☐ Builders' Course
- ☐ Plan-Reading—Buildings
- ☐ Plan-Reading—Shop Men
- ☐ Estimating
- ☐ Surveying
- ☐ Map Drafting
- ☐ Autos and Gas Engines

Name .....

Address .....

City ..... State .....

College or Home Study? State which .....

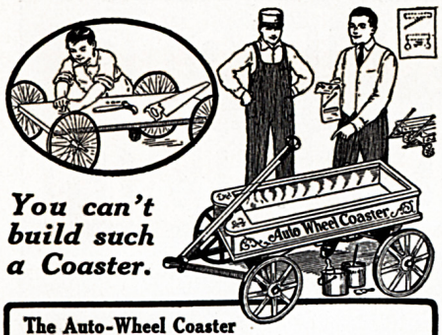

You can't build such a Coaster.

The Auto-Wheel Coaster

is designed and built by men who know boys' tastes, and have the materials to build with. For years a favorite because of its strength, speed and grace.

The Auto-Wheel Convertible Roadster

below is a double purpose wagon, changed in a minute from roadster to speedster.

Both types have the durable oval spokes, roller-bearings and steel axles.

FREE FELT PENNANT and Color Catalog for names of three coaster wagon dealers. (Tell which handles the Auto-Wheel).

CAPS FREE—to Auto-Wheel Coaster Club members. Special cap to captain. Organize your Club now, and write for details. Address

THE BUFFALO SLED COMPANY,

In Canada: Preston, Ont. 163 Schenck St., N. Tonawanda, New York.





BOYS
Build and Fly Your Own Training Plane

Train yourself in Aviation. Be an Amateur Aviator with an Aeroplane of your own. Learn how Aeroplanes are built; learn the principles of construction, operation and control. We sell IDEAL Accurate Scale Drawings, and Building and Flying Instructions which show you how to build a perfect Model Aeroplane, 3 ft. size, that will rise from the ground by its own power and fly like a big one. Send now for the Drawings and Instructions for the one you want to build.

Drawings and Instructions for
Curtiss Military Tractor
Bleriot Monoplane
Nieuport Monoplane
Taube Monoplane
Curtiss Flying Boat
Wright Biplane
Cecil Peoli Racer
25c EACH
Set of Seven $1.50 postpaid

Ideal Model Aeroplane Catalog 5c—None Free
Tells about Model Aeroplanes, Racing Aeroplanes, Flying Toys, and parts and supplies to build them with. 48 pages. Sent only upon receipt of 5 cents.

IDEAL AIRPLANE & SUPPLY COMPANY
159-161 Wooster St., New York City

MAKE RECORDS
DISC STYLE
On Your Phonograph

Play them on your own
VICTROLA, COLUMBIA
Edison, Brunswick, Sonora, Soulé or any phonograph made

When answering this ad mention the name and style of phonograph you have.

ELECTRO-MECHANICAL PARTS CO.
160 No. Wells Street Chicago, Ill.

What's in a Cover?

WHAT we really should say is, "What's ON a cover?"—but you *did* get the meaning after all. There are covers and covers, or to qualify it better, let us say cover illustrations. Tons of reams could be written about them and still the correct answer as to what constitutes a *good* cover would be as nebulous to you as it is to every other magazine editor. To be sure, the "pretty girl" cover has been proven *the* real seller, but so has the homely baby face, and the ugly bulldog, not to speak of Charlie Chaplin or the playful kitten cover. All of these make good covers and the public buys millions of copies of publications every day on account of them.

But the subject on the cover alone does not always mean that it will prove a big seller. Like as not the color scheme plays just as big a rôle. For if the color is not pleasing, the magazine often does not sell, even if the pretty girl *does* adorn its front. Then there is the "teaser," the "wonder-what-it-is" cover. If gotten up correctly, and if it stirs up sufficient curiosity in a man's breast—every copy will be sold as a rule. For after all, man is curiosity incarnate, and is willing to pay for appeasing it!

Our April cover was of this sort, as indeed it was an all-around ideal type. It had the mysterious element in it; it was startling, and the color combination was right and pleasing.

Some one—an authority on magazines—said that if we did get out a thousand covers, we could never hope to beat the April cover! And if the sales of the April issue is an index, his prophecy probably will come true! Indeed, we had to print an extra edition, and that did not cover the demand.

Of course, adverse criticism was not lacking. A few cranks—the usual monthly crop—were on deck, loudly denouncing us. Their virtuous ego had been shocked profoundly because we dared to show a woman unattired, save for her—skeleton!! These "critics" like as not forget that "to the pure everything is pure." They belong to that fanatic category of men who can't bear to look at the naked truth, because it is—naked!

So we were pleasantly surprised when hundreds of readers from all sections of the country began sending us clippings of the editorial which accompanies this article.

This editorial was written by Arthur Brisbane, the highest paid editorial writer in the world. It was publisht in the New York *Evening Journal,* the Chicago *American,* the Washington *Times,* the Boston *American,* the Atlanta *Georgian,* the San Francisco *Examiner,* and the Los Angeles *Examiner.*

Mr. Brisbane seldom uses illustrations in his editorials. That he picked out our April cover illustration proves that it must have been good. Indeed, we may paraphrase Mr. Brisbane's editorial by asking:

"What is a Cover Illustration? A Backbone." And again:

"While there are many *magazines,* so few of them are vertebrate that you can count them on the fingers of your two hands in the United States."

Ask yourself or your friend, "What *magazine* do you know that you can call a vertebrate? What *magazine covers* have you ever heard anybody discuss?" See how many answers you get.

Today the ELECTRICAL EXPERIMENTER is the most widely quoted scientific publication in this country. Within its covers you will find the last word on Radio, Electricity, Aeronautics, Chemistry, Astronomy, Mechanics and all the allied sciences, written so that the layman as well as the most modern theorist may enlarge his fund of knowledge. Therefore do you wonder that hardly a newspaper worth the name fails to quote the EXPERIMENTER several times a month?

What do *you* think is the reason?

EDITORIAL PAGE OF THE NEW YORK
EVENING JOURNAL

What Is an Editorial?
A Backbone.



Here, reproduced from that interesting scientific journal The Electrical Experimenter, is a picture showing a lady's skeleton photographed by modern methods. You will see the resemblance between these bones and the editorial.

Copyright 1919 by Star Company

On your knees thank kind Providence that we have not X-ray eyes, but eyes that see the surface, nothing below.

If like the mysterious penetrating rays we could see THROUGH, see the bones, the crinkly skull, with its interesting seams, and all the rest, how gruesome we should look to each other.

Marriages would all be made in heaven, none of them on earth. We should all look too ugly.

But wise Providence limits us in a million directions, giving us what we need to make us useful and efficient here and nothing unnecessary.

We cannot see colors below the red or above the violet. Insects probably see others. We cannot detect sound except within a narrow range. We see the bloom on the cheek, not the bone inside of it. We see the pretty graveyard with the green grass and the flowers, but do not know what happened to the individual who went in there.

We see the baby, just arrived, chewing its fist in the cradle, but don't know whence it came, what it was doing before it got here.

And it is all for the best.

This is written to answer a reader who asks, "What part should you say that the editorial plays in a newspaper?"

This little picture answers the question.

The editorial in a newspaper, if it IS an editorial, which it usually ISN'T, plays in that newspaper the part that the skeleton, and particularly the backbone, plays in the anatomy and the activity of the young lady in this picture.

She doesn't show it, her young man doesn't know it, the world at large doesn't know it, but the most important thing about her, that which makes her stand up and go through life well balanced on her two feet, is the bony structure, and particularly that BACKBONE.

The young man who doesn't know it really admires her for the backbone, admires her because she is a vertebrate; that is to say, one having a spinal column.

Without it she would lie flat on the ground, could not stand up, could not walk, could not even crawl along. Beautiful hair and eyes and color would all go for nothing without the backbone.

So, inquiring reader, it is with the newspaper and the editorial column. The editorial column is the spinal column.

If the newspaper has got it, it is a vertebrate. If it hasn't got it—and newspapers usually haven't—it is a mollusk. The mollusk is good to eat, leads a prosperous, cheerful life quite often. But it is a mollusk.

In the newspaper, as in the human being, the backbone, or editorial column, makes the thing stand up and walk and gives it its power.

In this charming young person, as you can see at a glance, the skeleton is by far the least attractive part. It cannot be compared with long, curly hair, pink cheeks, red lips, sparkling eyes, But it is more necessary than those.

The newspaper's backbone, when it happens to be a newspaper with a backbone, is perhaps the least attractive part, the least pleasing. It does not compare with the woman's page, the continued story, the fashion page, the comic page; but it is THE BACKBONE.

While there are many newspapers, so few of them are vertebrates that you can count them on the fingers of your two hands in the United States.

Ask yourself or your friend, "What newspaper do you know that you can call a vertebrate? What newspaper editorial column have you ever heard anybody discuss?" See how many answers you get.

Making a Practical Electrician

(*Continued from page* 117)

The new student starts at the very beginning, under an instructor that not alone initiates him into the electrical field, but helps to mold the character and general business policy of the future electrician.

In this school no text-books are in evidence! What the student hears and sees, as well as does, is first given to him verbally by his instructor. When he has done the work with his own hands, and made such notes as will be of assistance in the future to refresh his memory, the knowledge he has gained is the only text-book he uses. In the large electrical library of the school the student may at any time refer to any topics that seem hazy or not quite clear to him.

The new man learns the elementaries first, such as the meanings of various symbols and the rudimentary rules applying to electrical calculations, after which he does the practical work at his own table. Next he performs the simple feats of connecting up bells, batteries, telephones, fire-alarms, telegraphs and all sorts of intercommunicating systems.

From here he graduates into the high branch of applied electricity and in a practise building consisting of a ten room apartment he learns how to wire for light, heat and power by all the prevailing systems, such as cleat work, wood and metal moulding, knob and tube work, armored cable, flexible and metallic conduit.

As electrical power is one of the greatest factors of American industry, and its applications many, the electrician finds a great field in his endeavors in this one branch alone. Therefore, at this school every modern power problem is studied minutely. When this part of his course is finished the student is ready to tackle anything that may come his way, be it the installing or building of switchboards to carry enormous currents, the connecting and operating of alternating and direct current motors, dynamos or generators, or the operation or installation of storage battery systems as applied to electrical vehicle propulsion, and every other phase of this branch of electrical science. With his vast storehouse of knowledge gained by actual experience the student is well qualified to enter the field of Electric Traction, the coming achievement of this century, for he will have worked on, installed and run a complete electric trolley and locomotive.

Finally the student learns the biggest bug-a-boo of all, "Armature Winding," which to most people is a science in a class by itself. At this school a complete knowledge is quickly gained in a simple and practical manner. All puzzling details are rapidly grasped and within a short time the student is winding any form of armature, stator, field or motor ever used in actual practise. This and machine shop practise, repairs, electrical drafting, etc., complete the training course.

No specified time is set for a student to complete his studies—everything depends on the individual and the rate at which he can grasp things. No entrance "exams" are needed, one can start at any time. The men hold meetings, at which all new advances in science are discust and many novel features introduced.

When finally graduated the student, diploma in hand, stands ready to meet any phase of the electrical industry. He is able to undertake any job, for he has the confidence that only comes with the knowledge that he has done with his own hands the things he will have to do in actual practise in the business world. *Photos Courtesy N. Y. Electrical School.*

Foremen and Superintendents $1800 to $5000 Yearly

Office Manager or Auditor $1800 to $5000 Yearly



Engineers (all kinds) $2000 to $5000 Yearly

Learn to Fill Bigger Shoes

NO matter what kind of work you are doing now, a set of these great home study books will quickly fit you for a bigger and better paying job. We will send any set you select for one week's FREE examination, and if you want to keep them you pay only the special reduced price—at the rate of 50 cents a week. This is your opportunity to make more money—grasp it NOW. Use these books and a little spare time and LEARN TO FILL BIGGER SHOES.

Carpentry and Contracting
Five volumes, 2138 pages and more than 400 illustrations. Prepares for Contractor, Building Superintendent and Carpenter Foreman. Regular price,$25.00. Special price,$17.80.

Civil Engineering
Nine volumes, 3900 pages and 3000 illustrations, plates and diagrams. Prepares for Civil or Structural Engineer, Transitman, Estimator, Designer or Chief Draftsman. Regular price,$45.00. Special price,$29.80.

Telephony and Telegraphy
Four volumes, 1728 pages and 2000 illustrations, plates and diagrams. Prepares for Telephone Engineer, Wire Chief, Exchange Manager, Trouble Man or Telegrapher. Regular price, $20.00. Special price,$12.80.

Steam and Gas Engineering
Seven volumes, 3300 pages and 2500 illustrations, plates, diagrams, etc. Prepares for Stationary, Marine or Locomotive Engineer or Fireman. Regular price,$35.00. Special price,$21.80.

Law and Practice
(with Reading Course in 25 bound pamphlets). Thirteen volumes, 6000 pages and 24 illustrations. Prepares for all Bar Examinations. A wonderful aid to business men. Regular price,$72.00. Special price,$39.80.

Practical Accounting
Four volumes, 1840 pages and 800 illustrations, plates and diagrams. C. P. A. questions and practical problems. Prepares for Accountant, Bookkeeper or Cost Clerk. Regular price,$20.00. Special price,$12,80.

Pay Raisers

These books are written by well known authorities—the top-notchers in each line. They will help you make more money. You can't fail to understand them, because they are written in plain, everyday language. Thousands of photographs, diagrams, charts, etc., help to make difficult points as simple as A-B-C.

See our Free Examination—no money down offer below

Ask Our Experts

With these books goes free of all charge a $12.00 Consulting Membership in the American Technical Society. If any question puzzles you—write us. Our corps of experts and engineers will solve any problem. Ask all the questions you want for a whole year. This service is absolutely FREE.

Automobile Engineering
Five volumes, 2400 pages and 2000 illustrations. Prepares for Garage Foreman, Automobile Mechanic or Chauffeur. Invaluable to car owners. Regular price,$25.00. Special price,$17.80.

Machine Shop Practice
Six volumes, 2300 pages and 2500 illustrations. Prepares for Machine Shop Superintendent or Foreman, Foundryman, Pattern Maker, Tool Designer or Tool Maker. Regular price, $30.00. Special price, $19.80.

Sanitary, Heating and Ventilating Engin'ring
Four volumes, 1454 pages and more than 1400 illustrations, etc. Prepares for Sanitary Engineer, Heating and Ventilating Engineer, Master Plumber or Plumber. Regular price,$20.00. Special price,$13.80.

Mechanical and Architectural Drawing
Four volumes, 1578 pages and more than one thousand illustrations. Prepares for Architectural or Mechanical Draftsman. Regular price, $20.00. Special price, only $13.80.

Electrical Engineering
Seven volumes, 3000 pages and 2600 illustrations, plates and diagrams. Prepares for Electrical Engineer, Power Plant Superintendent, Substation Operator or Electrician. Regular price,$35.00. Special price,$19.80.

Accountancy and Business Management
Ten volumes, 3680 pages and 1987 illustrations, forms, etc. Prepares for Certified Public Accountant, Auditor, Office Manager, Accountant, Credit Man or Bookkeeper. Regular price,$50.00. Special price,$24.80.

Don't Send Any Money!

Write the name of the books you want on the coupon and mail it today. We will send the books at once, express collect, and you can use them just as if they were your own for a whole week. If you decide you don't want to keep them, send them back at our expense. If you like the books, as thousands of other men have after examination, just send us $2.00. You can send the balance of the special reduced price the same way—$2.00 each month (50 cents a week).

Start right now and learn to fill bigger shoes. There will be a better job looking for you if you do. Be ready to meet it when it comes. *Send the coupon now.*

American Technical Society, Dept. X338A, Chicago, Ill.

American Technical Society, Dept. X338A, Chicago, Illinois

Please send me set of _____ for 7 days' examination, shipping charges collect. I will examine the books thoroughly and, if satisfied, will send $2 within 7 days and $2 each month until I have paid the special price of _____. If I decide not to keep the books, I will return them by express at your expense. Title not to pass to me until the set is fully paid for.

Name _____

Address _____

Reference _____

SEND THE COUPON NOW

Be a Traffic Man-Earn $50 to $150 Weekly

Learn Professional Traffic Management

Unusual Opportunities await trained men in this field. Business institutions everywhere are forced to seek the services of competent Traffic Men. Constantly changing conditions require trained men to understand and solve the problems that arise. Big salaries are paid to men who can overcome these difficulties. YOU can fit yourself to do this pleasant work and command a salary from $3500 to $10,000 yearly.

TRAFFIC MANAGER

Pleasant Work—Easy to Learn

Spare time study—a few hours each week—will soon fit you to fill such a position. The work is easy, the surroundings pleasant and you become a man among big, successful men, with a private office, prestige,—and SUCCESS! Positions are permanent and lead to bigger opportunities constantly.



R. R. TRAFFIC MEN

TRAFFIC BUREAU

Your Success Depends On YOU!

Mere wishing and hoping will not bring results. You must GET ACTION if you would climb. The difference between "wages" and "salary" is in being able to do something the crowd can't do. Success is a matter of preparation,—it doesn't "just happen". The man willing to pay the price of preparation gets the big salary. Get out of the rut! Don't drift. Be a winner, not a wisher—and loser. Give yourself a chance. Only one thing can stop you—that's YOU. A pleasant job at a big salary awaits you as a trained Traffic Man. Our free booklet "Traffic" gives full particulars,—tells HOW you can "learn to earn the big salaries". The first step is to start—NOW! Prove your ambition. Take a step for SUCCESS. Write TODAY!

Our Courses Highly Practical

Entire course of instruction given by practical, experienced, successful traffic men. Their counsel and advice comes from their daily experience. They know the needs and requirements and they know the methods and information necessary to meet them, hence are amply fitted to successfully teach others. Each student gets personal attention. Practical assistance rendered for two years after graduation. An ordinary education, ambition and determination are all you need to win. An established Traffic Department at School furnishes practical experience, also offers opportunity for

Post Graduate Course Free

Students and graduates are privileged to use this feature without extra charge. Gives actual experience in rates, routing, classifications and packing. An exclusive feature not offered elsewhere.

TRAFFIC MANAGERS' salaries range from $3000 to $25,000 yearly.
TRAFFIC BUREAUS earn from $2000 to $10,000 yearly.
TRAFFIC SECRETARIES in Chambers of Commerce earn from $2500 to $10,000 yearly.

Interstate Traffic School, 266 Traffic Building, Ft. Wayne, Ind.

YOU HAVE A BEAUTIFUL FACE

BUT YOUR NOSE?

BEFORE

AFTER

IN THIS DAY AND AGE attention to your appearance is an absolute necessity if you expect to make the most out of life. Not only should you wish to appear as attractive as possible, for your own self-satisfaction, which is alone well worth your efforts, but you will find the world in general judging you greatly, if not wholly, by your *"looks,"* therefore it pays to "look your best" at all times.

Permit no one to see you looking otherwise; it will injure your welfare! Upon the impression you constantly make rests the failure or success of your life. Which is to be your ultimate destiny? My new *Nose-Shaper,* "TRADOS" (Model 24) corrects now ill-shaped noses without operation, quickly, safely and permanently. Is pleasant and does not interfere with one's daily occupation, being worn at night.

Write today for free booklet, which tells you how to correct ill-shaped noses without cost if not satisfactory

M. TRILETY, Face Specialist **1162 Ackerman Bldg., Binghamton, N. Y.**



This is the handiest and most useful Tool Kit to have around the house or Garage.

Fisher's Metal Tool Kits

For Electricians, Wiremen, Plumbers, Tinners, Motorists, Mechanics and Garage Men.

Only the very best of workmanship is used in the construction of all our Tool Kits. Neat in appearance, light in weight, and handy to carry—Dust, Dirt and Water-proof.

The corners, sides and ends are doubly reinforced, giving them the required strength and durability to withstand Knocks, Bumps, and rough usage that the average kit is subject to. The Hinges, Handle, Lock and Catches are all metal, and are of the most substantial and best quality that can be obtained.

The tray is intended to hold small tools, such as Pliers, Drill Bits, Screw Drivers, Chisels, etc.

SPECIAL OFFER: In order to introduce our Tool Kits more thoroughly we will ship your choice of any one of the following sizes, complete with tray, remittance to accompany the order, for $4.25—

No. 30, size 18x8x8. **No. 32,** size 19x9x9. **No. 34,** size 20x10x10. If a larger or smaller size than the above, or a different style Tray is desired, write for information and prices or send for Booklet. Agents and Dealers wanted in every locality. Address all orders and make all remittances payable to

JOHN C. FISHER & CO. - - - Freedom, Pa.



MANHATTAN RACER—2,000-FOOT FLYER

Complete Materials, Carved Propellers, Assembling Instructions, Ready to Assemble

$3.50 Postpaid in the U. S. A. **Working Blue Print only—35c**

Bleriot Model—600-Ft. Flyer Complete Parts and Instructions

$3.50 Postpaid in the U. S. A. **Blue Print only—35c**

HEC AIRPLANE CO., Dept. B, 6 W. 48th St., New York City

MONEY *for* YOU **Add to your Salary—Make extra Pin Money**
Start a lucrative business of your own

Spend an hour each day taking subscriptions for the "Experimenter." We'll pay you well and you'll enjoy the work. *Write for full particulars.*

Circulation Dept. ELECTRICAL EXPERIMENTER, 233 Fulton St., N. Y. City

Practical Chemical Experiments

(*Continued from page* 122)

decay may be at all noticeable.

COOKING OF EGGS. There is a notion prevalent that hard-boiled eggs are not digestible, and experiments made with eggs in the stomach lead to the same conclusion. Thus eggs slightly boiled have left the stomach in 1¾ hours, and raw in 2¼ hours, and hard-boiled in 3 hours. It should be noted, however, that raw eggs are only partially digested in the stomach, perhaps because they do not fully excite the flow of the gastric juice. The complete digestion is accomplished further along in the alimentary canal.

In cooking eggs, they should be placed in water at 170 to 180 degrees Fahrenheit, and allowed to remain for 10 minutes, when the yolk will be found to be more coagulated than the white, the egg albumin beginning to coagulate at 134 deg. Fahr., and it requires some time to heat the egg thruout.

A convenient method for cooking eggs without the use of a thermometer is to pour a quart or so of boiling water into a bowl, and put two or three eggs into this and allow them to remain for 10 or 12 minutes. The yolk actually cooks more readily than the white, and by this process the eggs are cooked uniformly thruout.

QUESTIONS AND ANSWERS

MIXING MILK AND ACID.

Ques. No. 5. A. J. Karlson, Phenix, Ariz., wants to know if it is possible after milk or cream is mixt with Sulfuric acid, to remove the latter and restore the acid to the same strength as before.

Ans. We do not quite understand your object in mixing the acid with the milk, only to revert back to the same original substances. However, this is not possible, as the acid enters into reaction with the formation of new compounds, which reaction is not reversible.

FIRE EXTINGUISHER.

Ques. No. 6. *Fire Extinguishers.* Mr. Kenneth Gordon, Tulsa, Okla., desires information regarding ingredients and operation of fire extinguishers.

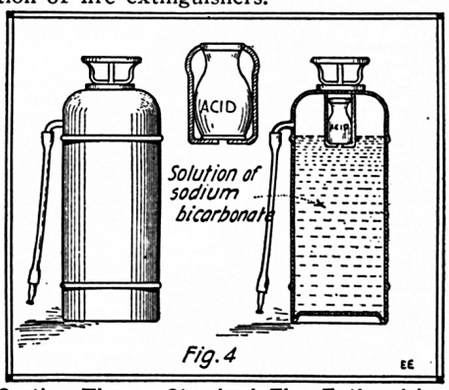

Section Thru a Standard Fire Extinguisher.

Answer: A solution of sodium bicarbonat is contained in a metallic cylinder, having a flexible tube at one of the upper sides. Sulfuric acid is kept in a small container above the bicarbonat as shown in the accompanying illustration. When the extinguisher is inverted, the stopper falls out of the bottle, permitting the sulfuric acid to come in contact with the solution of sodium bicarbonat, with the formation of carbon dioxid, thus:—

$$H_2SO_4 + 2NaHCO_3 = 2H_2O + Na_2SO_4$$

The presence of the carbon dioxid gen-

erated forces the solution out thru the hose.

"Pyrene" extinguishers contain carbon tetrachlorid, a highly volatile liquid, whose vapor does not burn.

In either case the gases liberated so envelop the flame that combustion ceases, due to lack of its supporter, oxygen.

RADIOACTIVE GAS MANTLE.

Question 7. *Welsbach Mantle.* Theodore McGowan, Elmira, New York, wants to know how he can conclusively show that the Welsbach gas mantle contains radioactive substances.

Answer: The most simple and conclusive method is to place a gas mantle upon a box which contains an unexposed photographic plate, wrapt in the usual opaque paper. Set these aside for a week or ten days, and develop as usual. The result will be a photographic reproduction of the mantle, exposed by its own light, liberated by the radioactive ingredients.

FULLER'S EARTH.

Question 8. William W. Staley, Portland, Oregon, desires information as follows: Where he can obtain Fuller's earth as mentioned in the April issue, Experiment No. 3 on Butter Tests; and also the composition of the alcoholic potash solution as mentioned in Experiment No. 4 in the same issue.

Answer: (a) *Fuller's Earth* may be obtained from any chemical supply house dealing in chemicals, and may be ordered under that name.

(b) The *Alcoholic Potash Solution* mentioned is prepared by dissolving 28 grams of caustic potash (in stick form) in 1 litre of alcohol.

Science in Slang

(*Continued from page* 143)

tomers at the same time. At that, the automatic is some little system and the guy who invented it certainly had it thick behind the ears. All you have to do is to move a little disc around the front of the 'phone, having numbers from 1 to 0, and you don't have to wait for a connection, either. If the line is busy you hear the usual busy signal which means, Hang up your receiver.' After a while you try it again and you can cuss and howl all you want if it's still busy. The automatic 'phone exchange doesn't mind it in the least, and take it from me, the system works to a charm."

"That so?" interposed Punk Loomis.

"When how comes it that if the system works so charmingly and charmfully, the rest of the universe doesn't adopt it?"

"You see," said Stokes, "it's like this: When a man bumps into you at the corner, almost upsetting you, it does your heart good to come back at him with a long string of verbosity that clears out your venom and makes you feel comfortable again, as soon as it is out of your system. But if you run into a lamp-post, it doesn't do you much good to cuss at it by letting loose a blue streak of hyphenated talk. Same with the automatic outfit. A man wants to have somebody to act as his personal goat once in a while. He wants to tell Central what is the matter with her. Or, if he is not inclined that way and time hangs heavily on his hands, he might want to speak to her about the color of her eyes or the texture of her soul. Never mind if she hangs up on him, that's the complexity of the human mind. So while the automatic is a fine outfit as far as it goes, it is too *inhuman,* for it refuses to be your goat and that is the reason——"

"Stokes!" yelled the steward. "Long distance is answering."

The Man Who *Wouldn't* Stay Down

He was putting in long hours at monotonous unskilled work. His small pay scarcely lasted from one week to the next. Pleasures were few and far between and he couldn't save a cent.

He was down—but he *wouldn't stay there!* He saw other men promoted, and he made up his mind that what they could do *he* could do. Then he found the *reason* they were promoted was because they had special training—an expert knowledge of some one line. So he made up his mind that *he* would get that kind of training.

He marked and mailed to Scranton a coupon like the one below. That was his first step upward. It brought him just the information he was looking for. He found he could get the training he needed right at home in the hours after supper. From that time on he spent part of his spare time studying.

The first reward was not long in coming—an increase in salary. Then came another. Then he was made Foreman. Now he is Superintendent with an income that means independence and all the comforts and pleasures that make life worth living.

It just shows what a man with ambition can do. And this man is only one out of hundreds of thousands who have climbed the same steps to success with the help of the International Correspondence Schools.

What about *you?*

Are you satisfied merely to hang on where you are or would you, too, like to have a real job and real money? It's entirely up to you. You don't *have* to stay down. You *can* climb to the position you want in the work you like best. Yes, you can! The I. C. S. are ready and anxious to come to you, wherever you are, with the very help you need.

Surely when you have an opportunity that means so much, you can't afford to let another priceless hour pass without at least finding out about it. And the way to do that is easy—without cost, without obligating yourself in any way, mark and mail this coupon.

TEAR OUT HERE

INTERNATIONAL CORRESPONDENCE SCHOOLS
Box 6189, SCRANTON, PA.

Explain, without obligating me, how I can qualify for the position, or in the subject, before which I mark X.

☐ ELECTRICAL ENGINEER	☐ CHEMICAL ENGINEER
☐ Electrician	☐ SALESMANSHIP
☐ Electric Wiring	☐ ADVERTISING MAN
☐ Electric Lighting	☐ Show Card Writer
☐ Electric Car Running	☐ Outdoor Sign Painter
☐ Heavy Electric Traction	☐ RAILROADER
☐ Electrical Draftsman	☐ ILLUSTRATOR
☐ Electric Machine Designer	☐ DESIGNER
☐ Telegraph Expert	☐ BOOKKEEPER
☐ Practical Telephony	☐ Stenographer and Typist
☐ MECHANICAL ENGINEER	☐ Cert. Pub. Accountant
☐ Mechanical Draftsman	☐ Traffic Management
☐ Toolmaker	☐ Commercial Law
☐ Ship Draftsman	☐ GOOD ENGLISH
☐ Machine Shop Practice	☐ Common School Subjects
☐ Gas Engineer	☐ CIVIL SERVICE
☐ CIVIL ENGINEER	☐ Railway Mail Clerk
☐ Surveying and Mapping	☐ STATIONARY ENGINEER
☐ MINE FOREM'N OR ENG'R	☐ Textile Overseer or Supt.
☐ ARCHITECT	☐ AGRICULTURE
☐ Architectural Draftsman	☐ Navigator ☐ Spanish
☐ PLUMBING AND HEATING	☐ Poultry Raising ☐ French
☐ Sheet Metal Worker	☐ Automobiles ☐ Italian

Name_____

Present Occupation_____

Street and No._____

City_____ State_____

CHARGE YOUR OWN BATTERIES and they are READY WHEN YOU NEED THEM

The highly efficient Full-Wave **F-F MAGNETIC RECTIFIER** operates from any handy Alternating Current Lamp Socket and enables you to charge your batteries safely at night unattended right in your own home garage and in the case of an automobile, without removing the battery from car or breaking any electrical connections. A full charge is done over night and costs about 6 cents for the average starting and lighting battery.

For operation from Farm Lighting Plants or Direct Current Service you would use the F-F Charging Rheostat.

Either style of **BATTERY BOOSTER** is Portable and furnished complete with Ammeter and Battery Clips.

No electrical knowledge whatever is required to operate the F-F Charging Outfit. You simply screw plug in lamp socket and snap charging wires on battery terminals. That's all there is to it.

The **F-F BATTERY BOOSTER** means Long Life to your battery, a Hotter Spark, a Quicker Start, Brighter Lights, Vitality to carry overload and work overtime, and that it is READY WHEN YOU NEED IT.

THE FRANCE MANUFACTURING CO. Cleveland, O.

Write for Bulletin No. 12



AND THAT'S ALL THERE IS TO IT

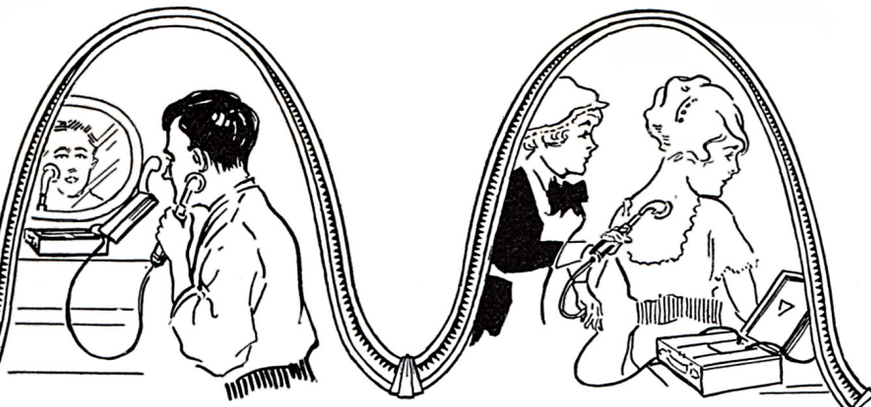

For Perfect Health, Strength, Unlimited Vitality & Improved Personal Appearance

The STERLING HIGH FREQUENCY VIOLET RAY

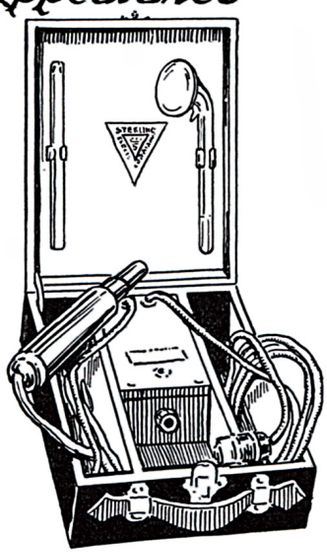

CELEBRATED Physicians and leading Beauty Specialists receive fabulous fees for treating with the Violet Ray. *You* can have a health doctor and beauty specialist right in your own home for your daily service at an average cost of less than a penny stamp.

The Sterling High Frequency Violet Ray was specially designed for home use—fitted to work from the ordinary lamp socket—easy to manipulate—under control at all times—and contains within its covers the Services of a servant, a doctor of medicine, and a nerve and beauty specialist—all in one, ready for instant service.

The Sterling Violet Ray is invaluable in the treatment of diseases of the skin, mouth, throat and lungs, derangements of the liver, kidneys, stomach and intestines—soreness in muscles and joints—tired or "sick" brains or lack of "nerve tone." It strengthens heart action—cleanses the blood—brings the flush of youth to the skin—enlivens the hair—puts a "spring in your step" and creates a clear eye and brain.

Six hundred thousand vibrations per second saturate the entire body with electricity—fill the blood with oxygen—eliminate waste, toxins, and poisons—ALL enemies of youthfulness.

Sterling Violet Ray Generators are the creations of Mr. Anthony Longoria, our Chief Designing Engineer, whose long years of practical experience in the designing and operation of Violet Ray Generators entitle him to the commanding position he holds in their manufacture. They are based upon the original discoveries of Nikola Tesla, first given to the world in May, 1891, but have been developed to the highest state of perfection ever reached in this type of generators.

Book and Valuable Information Free

We want to send you our book and full particulars about the Sterling Violet Ray Machines. Read how you can treat innumerable diseases and ailments, improve your personal charm, add strength and vitality and help yourself in hundreds of ways. Just mail the coupon or drop a postal. Do it now, this minute, before you forget it.

THE STERLING ELECTRICAL CORPORATION

1278 West Third Street Cleveland Ohio

STERLING ELECTRICAL SPECIALTIES

MAIL THIS COUPON FOR FREE BOOK

The Sterling Electrical Corporation, 1278 West 3rd St., Cleveland, Ohio.

Gentlemen:—

As per your offer in Electrical Experimenter, please mail me at once, free and postpaid, your book and full information about the Sterling Violet Ray Generators.

NAME .....

ADDRESS .....

CITY .....STATE .....

The Moon's Rotation

By Nikola Tesla

(*Continued from page* 133)

significance of this will be understood by reference to Fig. 7 in which the two masses, condensed into points, are represented as attached to independent weightless strings of lengths R_{g1} and R_{g2} which are purposely shown as displaced but should be imagined as coincident. It will be readily seen that if both strings are cut in the same instant the masses will fly off in tangents to their circular orbits, the angular movement becoming rectilinear without any transformation of energy occurring. Let us now inquire what will happen if the two masses are rigidly joined, the connection being assumed imponderable. *Here we come to the real bug in the question under discussion.* Evidently, so long as the whirling motion continues, and both the masses have precisely the same angular velocity, this connecting link will be of no effect whatever, not the slightest turning effort about the common center of gravity of the masses or tendency of equalization of energy between them will exist. The moment the strings are broken and they are thrown off they will begin to rotate but, as pointed out before, this motion neither adds to or detracts from the energy stored. **The rotation is, however, not due to an exclusive virtue of angular motion, but to the fact that the tangential velocities of the masses or parts of the body thrown off are different.**

To make this clear and to investigate the effects produced, imagine two rifle barrels, as shown in Fig. 8, placed parallel to each other with their axes separated by a distance $R_{g1} - R_{g2}$ and assume that two balls of same diameter, each having mass *m*, are discharged with muzzle velocities V_1 and V_2, respectively equal to $2\pi n R_{g1}$ and $2\pi n R_{g2}$ as in the case just considered. If it be further supposed that at the instant of leaving the barrels the balls are joined by a rigid but weightless link they will rotate about their common center of gravity and in accordance with the statement in my previous article above mentioned, the relation will exist $\frac{V_1 - V_2}{2} = \pi n (R_{g1} - R_{g2})$ n being the number of revolutions per second. The equalization of the speeds and kinetic energies of the balls will be, under these circumstances, very rapid but in two heavenly bodies linked by gravitational attraction, the process might require ages. Now, this whirling movement is real and requires energy which, obviously, must be derived from that originally imparted and, consequently, must reduce the velocity of the balls in the direction of flight by an amount which can be easily calculated. At the moment of discharge the total kinetic energy was $E = \frac{1}{2} m V_1^2 + \frac{1}{2} m V_2^2$ which is evidently equal to $m V_3^2$, V_3 being the effective velocity of the common center of gravity, from which follows that $V_3 = \sqrt{\frac{V_1^2 + V_2^2}{2}}$. The speed of revolution of the masses is, of course, $\frac{V_1 - V_2}{2}$ and the rotational energy of both balls, which must be considered as points, is $e = m\left(\frac{V_1 - V_2}{2}\right)$ The kinetic energy of translation in the direction of flight is then $\frac{1}{2} m V_1^2 + \frac{1}{2} m V_2^2 - m\left(\frac{V_1 - V_2}{2}\right)^2 = m\left(\frac{V_1 + V_2}{2}\right)^2 = m V_4^2$, $V_4 = \frac{V_1 + V_2}{2}$ being the speed of the

AK TABLETS FOR All Pain

Headaches
Neuralgias
Colds and La Grippe

Women's Aches and Ills
Rheumatic and Sciatic Pains

Ask Your Druggist for A-K Tablets
(If he cannot supply you, write us)

Small Size 10c — Fac-Simile — **Dozen Size 25c**

See Monogram AK on the Genuine

The Antikamnia Remedy Company, St. Louis, Mo.

Write for Free Samples

The Electric Safety razor makes shaving a pleasure. Blade vibrating 7,200 times a minute cuts the beard smoothly and without slightest pull or irritation—feels like a gentle massage. Can be used with or without electric current.

All users of the Lek-Tro-Shav speak well of it

A barber says—"Have shaved for years and have never used any shaving device near its equal."
A home user says—"The most pleasing shave I've ever had in my life. Shaves my face closer than I used to shave, but there is no after irritation or ill effects as I usually get from another razor."

No. 1 Made for use from Light Socket.
No. 2 Made for use from Dry Battery.

Write for illustrated circular describing Lek-Tro-Shav Safety Razor fully.

VIBRATING ELECTRIC RAZOR CO.
Dept. 122. Omaha, Nebr.

FUN $5.00

Noiseless Target Practice

Fit your .22 with a Maxim Silencer and get no end of fun this summer practicing in your back yard and on your vacation.

MAXIM SILENCER MAKES YOU A BETTER MARKSMAN

It eliminates recoil and all noise of the report, and steadies your aim. Direct from Dealer or Factory $5.00. Write for Free Book of Stories.

FREE BOOK

MAXIM SILENCER CO.
89 Homestead Ave., Hartford, Conn.

A Cigarette With One Hand

Don't drop everything every time you want a smoke. Let The

"HANDY" Cigarette Case

Hand it to you. Pull the cover down, then up, and the cigarette is ready. Fits the pocket. Full Nickel-Plated, shipped Post-Paid on receipt of price..... **50c**

CASE MFG. CO., 241 W. 23rd St., New York

common center of gravity, so that $V_3 - V_4$ is the loss of velocity in the direction of flight owing to the rotation of the two mass points. If instead of these we would deal with the balls as they are, their rotational energy

$$e_1 = e + i\omega^2 = m\left(\frac{V_1 + V_2}{2}\right)^2 + i(2\pi n)^2$$

i being the moment of inertia of each ball about its axis.

As will be seen, we arrive at precisely the same results whether the movement is rectilinear or in a circle. In both cases the total kinetic energy can be divided into two parts, respectively of the same numerical values, *but there is an essential difference.* In angular motion the axial rotation is nothing more than an *abstract conception;* in rectilinear movement it is a *positive event.*

Virtually all satellites rotate in like manner and the probability, that the acceleration or retardation of their axial motions—if they ever existed—should come to a stop precisely at a definite angular velocity, is infinitesimal while it is almost absolutely certain that all movement of this kind would ultimately cease. The most plausible view is that no true moon has ever rotated on its axis, for at the time of its birth there must have been some deformation and displacement of its center of gravity thru the attractive force of the mother planet so as to make its peculiar position in space, relative to the latter, in which it persists irrespective of distance, more or less stable. In explanation of this, suppose that one of the balls as M in Fig 5 is not of homogenous material and that it is similarly supported but on an axis passing thru its center of gravity instead of form. Then, no matter in what position the ball is fixed on the pivots, its kinetic energy and centrifugal pull will be the same. Nevertheless a directive tendency will exist as the two centers do not coincide and there is, consequently, no *dynamic* balance. When permitted to turn freely on the axis of gravity the body, of whatever shape it may be, will tend to place itself so that the line joining the two centers points to O and there may be two positions of stability but, generally, if the center of gravity is not greatly displaced, the heavier side will swing outwardly. Such condition may obtain in the moon if it had solidified before receding from the earth to great distance, when the

(*Continued on page* 160)

POPULAR ASTRONOMY

The Evolution of the Stars

(*Continued from page* 121)

Canopus, one of the giants of the universe. The transition of this type into the solar type stars of class G, to which our sun belongs, occurs when the group of iron lines known as group G begins to appear (see diagram I). The lines of calcium and hydrogen still remain more intense than any other lines in the spectrum, but many fine metallic lines now appear in ever-increasing intensity. The transition of this type into the advanced solar type K occurs when some of the metallic lines surpass the hydrogen lines in intensity. The group of iron lines has also greatly increased in intensity until it becomes one of the most conspicuous features of the K type stars. Stars of the solar type such as Capella and the sun are yellow, and stars of the advanced solar type, such as Arcturus and Aldebaran, are orange colored bordering on red. Their atmospheres are filled with dense metallic vapors. (See photos of solar and advanced solar type spectra.)

Class M is divided into giant and dwarf

Drake's Practical Mechanical Books

For Home Study



Pave the way for the big positions—the fat pay-envelopes. Written in non-technical language—easy to read—easy to understand. We will send any book postpaid—keep them five days—if not entirely satisfied return the books and your money will be refunded in full. Order direct from this page. Use the coupon.

Electrical Books

Electric Motor Control Systems and Methods. Leatherette.....$1.50
Electrical Tables and Engineering Data. Leatherette 1.50
Motion Picture Operation. Leatherette.. 1.50
Alternating Current. Leatherette..... 1.50
Wiring Diagrams and Descriptions. Leatherette 1.50
Armature and Magnet Winding. Leatherette 1.50
Modern Electric Illumination. Leatherette 1.50
Modern Electrical Construction. Leatherette 1.50
Electricians' Operating and Testing Manual. Leatherette..... 1.50
Drake's Electrical Dictionary. Leatherette 1.50
Electric Motors, D and A. Leatherette.. 1.50
Electrical Measurements and Meter Testing. Leatherette..... 1.50
Drake's Telephone Handbook. Leatherette 1.50

Automobile Books



Automobile Ignition. Leatherette, $2.00
Brookes' Automobile Handbook. Leatherette ..$2.00
Automobile Starting and Lighting. Leatherette ..$1.50
Ford Motor Car, Truck and Tractor Attachments. Cloth, $1.00
Ford Motor Car, Truck and Tractor Attachments. Leatherette ..$1.50
Automobile Catechism and Repair Manual. Leatherette.....$1.25
Gas and Oil Engine Handbook. Cloth... 1.00
Gas and Oil Engine Handbook. Leatherette 1.50

Modern Language Courses



French Without a Teacher, Spanish Without a Teacher, German Without a Teacher. By Professor Philip Schuyler Allen, University of Chicago. An entirely new home series of modern foreign languages. Simplest, easiest-to-master language method ever devised. French, Spanish or German. Pocket size. Each $1.25

Mail the Coupon NOW

Order on our five day money back plan.

FREDERICK J. DRAKE & CO.,
1009 Michigan Ave., Chicago, Ill.

Enclosed find ($.....), for which please send me prepaid the books checked in this adv. (or list attached). It is agreed that I may return same in 5 days if not entirely satisfied, and money will be refunded in full.

Name .....

Address .....

Let Me train YOU in AVIATION

Capt. G. F. Campbell, formerly Third Ace of the Royal Flying Corps.

My advice to you is to start right now to take my **HOME COURSE IN AVIATION** and prepare to fill one of the big jobs later. Wonderful opportunities. **Trained men in big demand.** Prepare now for big future. Lessons are easy to understand. Write TODAY for my FREE BOOK, "The Science of Aviation," and I will send it and write you a personal letter that will interest you. Address:

CAPT. GEO. F. CAMPBELL, Chief Instructor, National Aero Institute, 916 S. Michigan Ave., Dept. 7446, Chicago



Front

Back

SPECIAL KON-VER-TER SLIDE RULE

The Hamilton Improved circular slide rule has over 8000 graduations and over 1800 figures and letters on it, and is an engineers hand book and slide rule combined. It is 5.4 inches in diameter.

It will subtract, divide, multiply and add fractions or decimals of an inch. can be used as a decimal equivalent table, constructed of three disks and double transparent celluloid rider. Decimal equivalents given to six places in figures, gives sines, co-sines tangents, co-tangents, secants, co-secants versed sines, co-versed sines, square, cube and fifth roots with all their powers, finds the area, circumference and diameter of circles directly.

The Log scale has 1000 graduations. The DE LUXE rule may be bent double without injury, try this with rigid material such as metal. Has no clumsy operating attachments and will work proportions.

The KON-VER-TER is artistic as well as useful. In use all over the U.S., Canada, Mexico, Cuba, Porto Rico, Panama, Bermuda, Hawaii, Philippines, Australia and New Zealand. Instructions with rule.

Beautiful gold embossed black leatherette case, 50c extra. PLAIN UTILITY RULES $1.00. SPECIAL DE LUXE RULES white ivory celluloid $2.50 P. P

J. C. HAMILTON & CO.,
Dept. B 7 Water St., Boston, U.S.A.

Delivered TO YOU FREE

Your choice of **44 styles**, colors and sizes in the famous line of **"RANGER"** bicycles, shown in full color in the big new Free Catalog. We pay all the freight charges from Chicago to your town.

30 Days Free Trial allowed on the bicycle you select, actual riding test in your own town for a full month. Do not buy until you get our *great new trial offer* and low Factory-Direct-To-Rider terms and prices.

TIRES LAMPS, HORNS, pedals, single wheels and repair parts for all makes of bicycles at half usual prices. No one else can offer such values and such terms.

SEND NO MONEY but write today for the big new Catalog. It's free.

Rider Agents Wanted

MEAD CYCLE COMPANY Dept. F107 Chicago

LEARN HOW TO BREATHE-RITE FOR HEALTH

"Snorenomore"

Avoid dangerous mouth breathing which courts deadly infection of lungs and throat thru improper breathing.

Mouth Breathers inhale virulent germs, and are in constant peril

BREATHE RITE

Endorsed by Physicians

Worn without annoyance.

Made of gold wire and aluminum pads.

At Best Supply Houses or sent direct for.....$2.00

Booklet Free

BREATHE-RITE CO., Dept. 2, Ann Arbor, Mich.

How to Get Rid of Moles

A simple, safe home treatment—15 years' success in my practice. Moles (also BIG growths) **Dry Up.**

Ask for Free Booklet of Full Particulars

WM. DAVIS, M.D.
4140 State Street Perth Amboy, N.J.

You can be quickly cured, if you

STAMMER

Send 10 cents coin or stamps for 70-page book on Stammering and Stuttering, "Its Cause and Cure." It tells how I cured myself after stammering for 20 years.

Benjamin N. Bogue, 755 Bogue Building, Indianapolis

Be an Artist

Comics, Cartoons Commercial, Newspaper and Magazine illustrating. Pastel, Crayon portraits. Poster and Fashions. **Earn Big Money.** *Taught by Mail or Local Classes.* Write for illustrated booklet, terms and list of successful pupils

ASSOCIATED ART STUDIOS, 13A Flatiron Bldg., N. Y.

red stars with banded and fluted spectra corresponding to Secchi's type III. Their dense atmosphere are filled with metallic compounds and they are superficially at least much cooler than stars of the other types outlined above. (See spectrum of typical giant type M star.)

Class N corresponds to Secchi's type IV and its characteristics have been mentioned above.

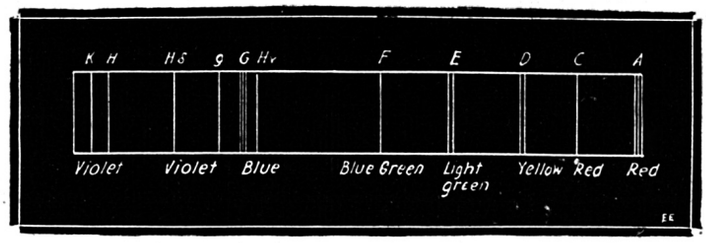

The Relative Positions of Certain Lines Prominent In Various Stellar Spectra Are Indicated In the Above Diagram of the Visible Spectrum: K and H Are the Absorption Bands of Calcium In the Extreme Violet End of the Spectrum. The Ultra-Violet Lies Beyond to the Left. Hδ, Hv, F, and C Are the Characteristic Absorption Lines of Hydrogen Prominent In Type I and Type II Stars. g Is a Line of Calcium In the Violet. G Is a Group of Lines Due to Iron Prominent In Solar Type Stars. E Is a Second Group of Iron Lines. D Is a Pair of Lines In the Yellow Due to Sodium. A Is a Group of Lines In the Extreme Red Originating In Our Own Atmosphere.

The position of the *Novae* or *Temporary Stars* in this scheme of evolution is somewhat uncertain, if in fact they fit into it at all. At the time of their outburst their spectra are usually rich in violet light and they are therefore to be classed with first type stars. Many sudden and peculiar changes take place in their spectra, but one characteristic is common to all novae, and that is the existence of both bright and dark bands of helium and hydrogen greatly displaced in position, the dark ones being shifted toward the violet and the bright ones toward the red.

Temporary stars usually pass first into bright line stars and later into planetary nebulae, thus reversing the generally accepted order of evolution from nebulas to bright line stars.

Tho a gradual transition from one type of star to the next can be traced, it does not necessarily follow that *all* stars pass from nebula to type M or type N stars thru all the types O, B, A, F, G and K in order and from there on to gradual extinction. It is possible that some stars become extinct or cease to shine without passing thru all of these stages.

The fact that in certain double star systems two stars physically connected and therefore evidently formed at the same time are at different stages of development calls for explanation. Some stars may run thru the course of evolution more rapidly than other stars, and some stars may lose their radiating powers before they have completed the normal course of evolution.

The marked division of the solar and late type stars into dwarf and giant stars also has a direct bearing on the problem of the order of the evolution of the stars. Tho the generally accepted order of evolution is that outlined above, it is possible that the sequence advanced by Prof. H. N. Russell may be the true one in which the evolution begins with giant stars of type M, continues in an order reverse to the one usually accepted thru giants of types K, G and F to the type B helium stars, hence in the normal order thru the *dwarfs* of types F, G, K and M to extinction. This would account for the existence of both giants and dwarfs of the later types. The Orion or Helium stars, which are the hottest of all the stars, would in this case represent the height of stellar development.

Whatever may prove to be the exact sequence in the evolution of the stars, the fact that there is evolution and change going on among the stars is indisputable. Such is the similarity existing among the hundreds of millions of stars of the universe that they can be grouped or classified under one or another of the few distinct types outlined above according to their color and the characteristic lines of their spectra.

(The next installment will appear in an early issue.)

TABLE SHOWING THE ORDER OF THE EVOLUTION OF THE STARS ACCORDING TO THE CLASSIFICATIONS OF SECCHI AND THE HARVARD COLLEGE OBSERVATORY

Type of Star Secchi	Type of Star Harvard	Typical 1st Mag. Star	Color	Characteristic Lines of Spectra
.....	Gaseous Nebulae	.....	Green	Bright lines of helium hydrogen and nebulium.
.....	O (Wolf-Rayet)	.....	Blue-White	Bright bands and lines of helium and hydrogen changing later to dark bands and lines.
.....	(Novae)	Nova Persei	.....	Bright and dark bands, greatly displaced, of helium and hydrogen.
Type I	B (Helium)	Rigel	Blue-White	Dark absorption lines of helium and hydrogen, but chiefly of helium and a few faint metallic lines.
Type I	A (Hydrogen)	Sirius	White	Intense absorption lines of hydrogen, reaching maximum. Increasing strength of metallic lines.
Type I-II	F (Calcium)	Canopus	White tinged with yellow	Intense bands and line "g" of calcium in violet. Hydrogen lines of great intensity; many strong metallic lines.
Type II	G (Solar)	Capella	Yellow	Increased intensity and number of metallic lines. Strong hydrogen lines still surpassing metallic lines in intensity. Appearance of Group G lines due to iron.
Type II	K (Advanced Solar)	Arcturus	Orange	Decrease in strength of hydrogen lines. Great increase in number and strength of metallic lines and Group G of iron.
Type III	Ma (banded)	Betelgeuse	Red	Appearance of banded spectra due to compounds of titanium oxide.
Type III	Mb (banded)	.....	.....	Marked faintness of violet end of spectrum.
Type IV	N (Carbon)	.....	Red	Banded spectra due to presence of carbon compounds. NOTE—This latter type does not follow in order after Type M, but is entirely independent of it in its evolution. The novae also do not fit into the regular chain of evolution, but are placed after the stars they most closely resemble.

MOST SENSITIVE MICROPHONE FOR $1.00

YOU can easily make a highly sensitive detectophone by using a Skinderviken Transmitter Button to collect the sound waves. You can build your own outfit without buying expensive exquipment. Think of the fun you would have with such an instrument! It's very simple, too, and inexpensive.

You can install an outfit in your home and hear the conversation being held all over the house. You can connect up different rooms of a hotel. *Our outfit was used by secret service operatives during the War. It is being used on the stage.*

Actual Size

AMONG electrical experimenters the button has created a sensation. It is not uncommon to receive unsolicited letters like these: "I received transmitter button today and I wish to inform you that it works great and is *the best I have ever seen or heard of for the price.* I will certainly recommend it to my friends. I wish to thank you for your good service."

"I have been using one of your transmitter buttons, and it has proved to be worth more than its value in my experimenting." "I received one (Transmitter Button) some time ago, and they are just O. K. for experimentary." "I have been using one of your transmitter buttons for experimental work and it certainly lives up to all you say for it *and then some.*"



So much for its commercial adaptations! *You* can procure apparatus of the same type.

One of the main advantages of the Skinderviken Transmitter Button lies in its ultra-sensitiveness.



You can place it in any position you like. It is the greatest invention in micro-phones and has won recommendations from men of high standing in the scientific world. It is being used all over the world. You can mount it most anywhere. Card board boxes, stove pipes, stiff calendars and hundreds of other places will suggest themselves to you. The buttons cannot be seen by any one in the room as they are so small and light. Only a small brass nut is exposed to the view.

Full directions for connecting up the button for use as a detectophone are given in booklet No. 4 which is sent with each button.

The only instruments needed to complete a detectophone outfit, in addition to a Skinderviken Transmitter Button are a receiver, battery, and, if desired, an induction coil.

REAL BARGAINS

These prices are very low

All equipment is GUARANTEED. The apparatus is the same as sold by us to large telephone companies. 110 volt telephone generators.

3 bar	$1.75	Weight 6½ lbs.
4 bar	2.25	" 8 lbs.
5 bar	2.75	" 10 lbs.
Ringers 80 ohm	.50	" 1 lb.
" 1000 ohm	.75	" 1 lb.
Silk cords, 6 ft. 3 cond.	.25	" 3 oz.
" " 6 ft. 4 cond.	.28	" 3 oz.
" " 3 ft. 2 cond.	.15	" 1 oz.
Transmitters complete with Steco transmitter button	$1.50	12 oz.
Induction coils	.40	6 oz.
Receivers—Watch Case 75 ohms	1.25	1 lb.











Mr. H. Gernsback, editor of this magazine, who is the dean of electrical experimenters, said: "In writer's opinion, obtained by actual elaborate tests, your Transmitter Button is probably most efficient device of its kind on market today, due to its simplicity and other outstanding features. Should have a great future."

The same circuit connections apply to all experiments, regardless of how the transmitter button is mounted.

The Skinderviken Transmitter Button operates on one or two dry cells. It often happens that two cells produce too much current and the sounds are deafening. We recommend either one fresh cell or two worn out cells.

We have the utmost faith in our transmitter button. We guarantee satisfactory service or we will refund the purchase price. Boys—Young and old—send in a dollar bill RIGHT NOW! You can't lose. If you're not satisfied, you receive your dollar back. Isn't that fair?

Send a 3c stamp for a copy of Booklet No. 4.

$1.00 ppd. **Skinderviken Telephone Equip. Co. Inc.**

335 Broadway NEW YORK
2134-36 N. Clark Street CHICAGO

$1.00 ppd.

USE THIS COUPON

STECO: (Use Pencil) E. E. 6-19

Gentlemen:—Please enter an order for

[ ]	Skinderviken transmitter buttons	@ $1.00	prepaid
[ ]	110 volt generators bars	@	Wt. lbs.
[ ]	Ringers ohms	@	Wt. lbs.
[ ]	Cords conductor ft.	@	Wt. lbs.
[ ]	Induction coils	@ .40	Wt. lbs.
[ ]	Transmitters with T Button	@ 1.50	Wt. lbs.
[ ]	Receivers—Watch Case—75 ohms	@ 1.25	Wt. lbs.

Amount Enclosed: Ship via
Enclose sufficient postage for mailing.

Ship to.....

.....

.....

Send Booklet No. 4. [ ]

MY NEW BOOK

"Muscular Development"

will tell you how to get a wonderful muscular development like mine, perfect health, abundance of vitality and great strength as I have.



EARLE E. LIEDERMAN
Why not look as healthy and be as strong as I am?

The results of my system are shown on my own person and that is recommendation enough. To give every one the opportunity to profit by what I have learned, I will mail my book, for a limited time only, on receipt of

10c Stamps or Coin

This wonderful book will help you. It is profusely illustrated and contains pictures of many of the world's strongest men whom I have trained. Send for it **to-day.** Right now, while it is on your mind.

EARLE LIEDERMAN, Dept. 209, 203 Broadway, N.Y.

RIGHT NOW—You Can Make Big Profits In BATTERY CHARGING

Owners of HB Chargers everywhere are making $100 to $400 *Clear Profit* every month. Business better than ever. YOU can do as well. Don't delay. Get out and get this business with sturdy, dependable HB Equipment.

THIS HB 500 WATT CHARGER WILL PAY $100 to $200 CLEAR PROFIT EACH MONTH

No electrical knowledge required to install or operate. Recharges 7 6-volt batteries at once. Costs 12c to 15c each to recharge, customer pays 75c to $1.50. Big, quick, clean profits—easily made. No burnouts or expensive renewals. Steady service 24 hours a day. Economical to run, requires no attention, save occasional oiling.



$25 Puts This Money-Maker in Your Garage on Money-Back Guarantee

Balance in 9 monthly payments of $20 each. Earnings easily pay for machine. Pin $25 initial payment check to this ad and send today for trial order. Sold under **HB Absolute Money-Back Guarantee.** Order NOW. Don't delay. Get busy! Get those Profits!

HOBART BROTHERS COMPANY
Box 6E, Troy, Ohio
Successful Manufacturers Since 1893

Mining Engineering

For Your Profession

A wide and profitable field, not overcrowded, is open to forward-looking young men. The Michigan College of Mines (established 1886) offers a comprehensive four year course which can be completed in three years. Its breadth provides foundation for expert specialization in that field of engineering which most appeals to the student. All phases of technical knowledge and instruction relative to mine development and operation thoroughly presented by constructive methods. Practical experience is here combined with theoretical work in a rare way. *College is located in center of one of the world's greatest copper mining districts.* Close relations are constantly maintained with mines, mills, smelters, electrolytic and power plants which are practically a part of the College equipment and a factor of enormous value in instruction. "M. C. M. Men Make Good." For descriptive book address Administrative officer, Houghton, Mich.

Michigan College of Mines

Do You Want to Know

HOW TO DEVELOP

Vitality, Energy, Endurance, Nerve Strength, Muscular Strength, Perfect Physique?

My FREE BOOKS, **"The Whys of Exercise"** and **"The First and Last Law or Physical Culture,"** tell you if you are weak or underdeveloped, how to grow strong; if strong, how to grow stronger. They explain how to develop the lungs and muscle, the strong heart and vigorous digestion—in short, how to improve health and strength internally as well as externally. SEND TODAY—NOW—for these FREE BOOKS. Enclose 4c in stamps to cover postage.

PROF. H. W. TITUS
56-58 Cooper Sq. Dept. 602. New York City

Swing 4 in., 11 in. between centers, 17 in. total length. Shipping weight 13 lbs. Bed of lathe is machined. Workmanship first-class. Equipped with wood turning chuck. Can be fitted with 3 in. face plate and drill chuck as special equipment. Order one today. Price $5.00 cash with order. SYPHER MFG. CO., DEPT. C TOLEDO, OHIO

Learn to **PAINT SIGNS and SHOW CARDS**

I teach you personally, by mail, in a short time. Oldest and largest School. Big field, work interesting. You can

EARN $18 TO $45 A WEEK

Fritzner, Minn., wrote. "Did job after first lesson, got $10, profit $7.05." Crawford, B. C. says: "Earned $200.00 while taking course." Get literature, samples, guarantee; all FREE.

DETROIT SCHOOL OF LETTERING
Established 1899. 686 D. S. of L. Bldg., DETROIT, MICH.

The Moon's Rotation

By Nikola Tesla

(*Continued from page* 157)

arrangement of the masses in its interior became subject to gravitational forces of its own, vastly greater than the terrestrial. It has been suggested that the planet is egg-shaped or ellipsoidal but the departure from spherical form must be inconsiderable. It may even be a perfect sphere with the centers of gravity and symmetry coinciding and still rotate as it does. Whatever be its origin and past history, the fact is, that at present all its parts have the same angular velocity as though it were rigidly connected with the earth. This state must endure forever unless forces from without the luna-terrestrial system bring about different conditions and thus the hope of the star-gazers that its other side may become visible some day must be indefinitely deferred.

A motion of this character, as I have shown, precludes the possibility of axial rotation. The easiest way to free ourselves of this illusion is to conceive the satellite subdivided into minute and entirely independent parts, as dust particles, which have different orbital, but rigorously the same angular, velocities. One must at once recognize that the kinetic energy of such an agglomeration is solely translational, there being absolutely no tendency to axial rotation. This makes it also perfectly clear why the moon, provided its distance does not greatly increase, *must* always turn the same face to us even *without any inherent directive tendency* nor so much as *the slightest effort from the earth.*

Referring to the librations of longitude, I do not see that they have any bearing on this question. In astronomical treatises the axial rotation of the moon is accepted as a material fact and it is thought that its angular velocity is constant while that of the orbital movement is not, this resulting in an apparent oscillation revealing more of its surface to our view. To a degree this may be true, but I hold that the mere change of orbital velocity, as will be evident from what has been stated before could not produce these phenomena, for no matter how fast or slow the gyration, the position of the body relative to the center of attraction remains the same. The real cause of these axial displacements is the changing distance of the moon from the earth owing to which the tangential components of velocity of its parts are varied. In *apogee,* when the planet recedes, the radial component of velocity decreases while the tangential increases but, as the decrement of the former is the same for all parts, this is more pronounced in the regions facing the earth than in those turned away from it, the consequence being an axial displacement exposing more of the eastern side. In *perigee,* on the contrary, the radial component increases and the effect is just the opposite with the result that more of the western side is seen. The moon actually swings on the axis passing thru its center of gravity on which it is supported like a ball on a string. The forces involved in these pendular movements are incomparably smaller than those required to effect changes in orbital velocity. If we estimate the radius of gyration of the satellite at 600 miles and its mean distance from the earth at 240,000 miles, then the energy necessary to rotate it once in a month would be only

$$\left(\frac{600}{240{,}000}\right)^2 = \frac{1}{160{,}000}$$ of the kinetic energy of the orbital movement.

ZIP-ZIP Patented Sept. 3rd. 1918

The Greatest 50 Ct. Article on the Market. Shipped right from the factory the same day we receive your order. The Prong is made of beautiful metal; never break or wear out; scientifically made and best workmanship. The rubbers are elastic and lasting, with plenty of pep and force. Zip-Zip, complete, only **50c prepaid.** Be sure the name Zip-Zip and our address appear on the article you buy. Order from us or any Sporting Goods Store in your city. Send Stamps, Coin or Money Order.

AUTOMATIC RUBBER CO.
COLUMBIA, S. C.

Telegraph Pictures
BY ELECTRICITY

Complete sets of two machines of this marvelous equipment at ridiculously low prices. Instructive, mystifying and useful. This picture of President Wilson was telegraphed by these machines. Will transmit pictures, maps, drawings and hand writing. Picture telegraphing is the coming science. Write today.

J. LEISHMAN CO., Dept. T Ogden, Utah

CLEARTONE PHONOGRAPHS
$4.00 to $200.00 Retail

Needles 45c per thousand in lots of 500,000 Motors $1.35 to $14.75 each. Tone Arms and Reproducers $1.30 to $5.75 per set. Main Springs 20c to 90c each. Records, Needles, Sapphire Points and Parts at reasonable prices.
Write for our 84 page catalogue, the only one of its kind in America, illustrating 33 different styles of Talking Machines and over 500 different Phonographic Parts.

LUCKY 13 PHONOGRAPH COMPANY
Export Dept. 46B E. 12th St., N. Y., U.S.A.

SAVE 25% to 60%
on slightly used
GRAFLEX-KODAKS

Cameras and Lenses of every description. Equal to new. Save money. Write now for **Free Bargain Book and Catalog** listing hundreds of money-saving bargains in slightly used and new cameras and supplies. **All goods sold on 10 days' Free Trial.** Money back if not satisfied. You take no chances dealing with us. We have been in the photographic business over 16 years. Write now.

CENTRAL CAMERA CO., Dept. 176 124 S. Wabash Ave., Chicago

UMAKEM

Airplane Workchest, containing aircraft work table with mitre cutting board and length gauge, steel drill, steel hammer, Model Maker's steel square, screwdriver, sandpaper block, 10" scroll saw, together with finest quality reed and bass wood, aluminum, silk, para rubber, full set of blueprints, directions, and all fittings for building one 36" Bleriot Model flying Monoplane. Price $10.00. Other UmakeM Outfits 50c to $50.

W. R. PRICE, Inc.
No. 2 UmakeM Building, 127 Fifth Avenue, New York

RAISE BELGIAN HARES For Us

HUGE PROFITS easily and pleasantly made. We furnish stock and pay you $6.00 a pair and express charges for all you raise. Contract and book "Fortunes in Hares", by mail **Free.**

NATIONAL FOOD & FUR ASSOCIATION
Dept. 24 MILWAUKEE, WISC.



EARN MONEY

Stamping Names on Key Tags. $50

Either sex. Spare time. Some make Send 25c for Tag with your name on and instructions. Returned if required. **Exp. Key Tag Co., Cohoes, N. Y.**

STAMMERER

Send 10 cents for my remarkable book, "How To Stop Stammering." Kill the fear of stammering. Re education the key.

The Hatfield Institute, 109 N. Dearborn St., Chicago, Ill.

TYPEWRITERS

$10 AND UP. ALL MAKES. SAVE $25 TO $50 on rebuilt at the factory by the well-known **"YoungProcess."** Sold for low cash—installment or rented. Rental applies on purchase price. Write for full details and guarantee. Free trial. **YOUNG TYPEWRITER CO., Dept. 819, Chicago**

BE A C.P.A. ACCOUNTANCY

The Highest Paid Profession taught thoroughly in a few months of home study by new system

FREE BOOK International Accountants Society Dept. 39F, 2626 S. Mich. Ave. Chicago

158 Genuine Foreign Stamps—Mexican War Issues, Venezuela, Salvador and India Service, Guatemala, China, etc., only **10c.** 100 all diff., fine, 15c; 200 all diff., 25c. FINEST APPROVAL SHEETS 60% to 80%. AGENTS WANTED. Big 72-page Lists FREE! **We Buy Stamps.** Est. 25 years. **C. E. HUSSMAN STAMP CO., Dept. 6 ST. LOUIS, MO.**

Learn Watchwork, Jewelrywork and Engraving A fine trade commanding a good salary, and your services are always in demand. Address HOROLOGICAL Department, Bradley Institute, Peoria, Ill., for our latest catalog.

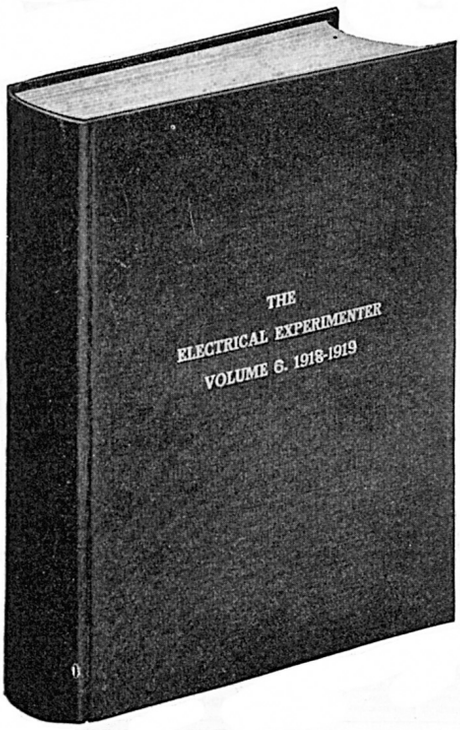

This Book Cost $34,000

1200 Authors Contributed

Our Bound Volume No. 6 contains a goldmine of electrical and scientific information. No such value has ever been offered before for so low a price. A marvelous cyclopedia of electricity. A reference book of authentic information not found in any other book in print.

Volume contains twelve numbers of the "Electrical Experimenter" magazine — May, 1918 to April, 1919, inclusive. There are 984 pages, 2,110 complete articles, 1,908 illustrations, 369 questions and answers. Sizes, 12″ high; 9″ wide; 2″ thick.

A world of electrical information; the entire electrical Progress for one year; the greatest reference book on current "Wireless"—all at a price within reach of everybody. Mind you, the book is durably bound in attractive green linen with heavy covers. Letters stamped in gold. You will be proud to have it in your library. We have only 600 copies, therefore be sure and order to-day. Shipping weight 8 lbs. Add a sufficient amount for postage, otherwise we must ship by express.

$3.00

add postage for 8 lbs.

Positively the Greatest Electrical book bargain in the World. We ship AT ONCE. Order today to avoid delay.

EXPERIMENTER PUBLISHING COMPANY, Inc.

Book Department

233 Fulton Street - New York, N. Y.

Fill in--Tear out--and Mail

6-19

Gentlemen:

Please send at once your Volume No. 6 as advertised, for which I enclose herewith $.....

I also enclose $.....extra for postage.

.....

.....

Name .....

Address .....

....

Close-ups of New Scientific Movies

(*Continued from page* 118)

play starring May Allison in "The Island of Intrigue."

Lawrence Waring, millionaire oil magnate, compelled to go East on business, worries about leaving his daughter Maida alone. The problem is solved by the arrival of a letter from Mrs. Juliet Smith, an old friend, who invites Maida to spend the summer at her country home on Sunset Island.

A woman, who says she is Mrs. Smith, calls later and Maida, who has never met her father's friend, goes aboard a yacht, en route for the island. She meets Alaric and Lorna, Mrs. Smith's "son" and "daughter," and a "Count" Pellessier.

A few hours later the Waring house is in a state of alarm when the real Mrs. Smith arrives. It is then that Mr. Waring realizes that his daughter has been abducted.

In the meantime the yacht arrives at the island, but Maida, enjoying her holiday, does not realize that she is a captive. On one of her long walks thru the island she comes upon a camp and meets its owner, Gilbert Spear. She does not mention this to the others, but the meetings, begun as a lark, soon become a habit.

In the meantime the Count, by a wireless apparatus cleverly concealed in a piano, sends a message to Waring demanding fifteen thousand dollars as his daughter's ransom. He gets no answer and decides to force Maida to write of her peril to her father. On finding the true standing of the "Smiths," Maida refuses to write the letter and is at once locked in a room. The band have also discovered the friendship which exists between Maida and Gilbert, and after a fierce struggle he is captured, tied and gagged, and placed in a cave.

A second message is sent to Waring, which is also received at a Naval Station, and in this manner the location of the island is disclosed. A submarine chaser, with Waring aboard, goes to the rescue.

In the meantime Maida escapes from the room and flies to the camp. She finds Gilbert gone, but his dog, frantic with delight at her arrival, leads her to the cave. She soon releases him and together they hasten to his motor boat to escape. They are overtaken by the band and are just about to be taken aboard the yacht when the Naval boat comes upon the scene. The swindlers are captured and Maida introduces Gilbert to her father as the man she loves.

"America, First, Last and Always," is the theme of Pathé's new serial, "Wolves of Kultur," abounding in many thrilling radio scenes, underground and cave laboratories, and radio controlled torpedoes. It is the story of Alice Grayson, a cultured young society lady of wealth and refinement, possest of an ardent patriotism which has been stimulated by the completion of the invention by her uncle of an electrically driven wireless controlled torpedo.

Visiting her uncle's laboratory one day Alice finds he has been foully murdered by alien spies, and the plans and model of his invention stolen. Over his dead body Alice vows vengeance for his murder and for this traitorous act to America. She has learned from her uncle before he dies that "Hartman and Zaremba are guilty of this."

Alice, in her rôle of a Secret Service Agent, has finally located the death-dealing torpedo and the operator awaiting orders.

Before she can interfere the torpedo has been launched and is sent on its deadly mission, against a U. S. troop ship, when Alice, in a most superhuman effort, throws a rock at the operator and knocks him out.

She seizes the wireless apparatus and turns the course of the torpedo against the yacht, aboard which are the plotters.

STRONGFORT
The Perfect Man

ARE YOU SLIPPING?

Are you losing your grip—your ability to DO things, to make any progress in your business or even to make good in your present position? If you wake up in the morning tired before you begin the day, with you back aching, your digestion out of order, your nerves frazzled, you brain befogged, **don't let yourself slip any further:** there's no toboggan slide so rapid as the road down to chronic ill health and the consequent loss of all enjoyment in life.

GET A GRIP ON YOURSELF

Don't wait a single day before taking steps to rid yourself of the ailments or bad habits that will be millstones about your neck as long as you live, if you don't free yourself from them. When a man is on the limited for the scrap heap, every day counts; what is easy today will be a heap harder tomorrow, almost impossible if you wait too long.

YOU CAN DO IT

You can have renewed vitality; health, strength, energy, all that makes life worth living, if you throw away all druggist's dope and take hold of yourself in the right way.

I'LL SHOW YOU HOW

I have shown the way out to thousands of men who knew they were losing their grip on things through indigestion, constipation, biliousness and other ailments; I have shown them how to gain the energy and strength of will to break off bad habits they knew were undermining their constitutions, how to build up and strengthen their vital organs, develop their muscles, and make live, active, red-blooded, forceful MEN of themselves again.

My book, **"Promotion and Conservation of Health, Strength and Mental Energy,"** will show you how they did it: how YOU can do for yourself what they did for themselves, in a simple, easy, natural way. Send for a copy—IT'S FREE. Enclose three 2c stamps to cover postage and packing and I'll mail it to you at once.

LIONEL STRONGFORT

Physical and Health Specialist

937 Strongfort Institute, Newark, N. J.

FREE CONSULTATION COUPON

Mr. Lionel Strongfort, Newark, N. J.—Please send me your book, **"PROMOTION AND CONSERVATION OF HEALTH, STRENGTH AND MENTAL ENERGY,"** for postage of which I enclose three 2-cent stamps. I have marked (X) before the subject in which I am interested. (937)

..Colds	..Insomnia	..Vital Losses
..Catarrh	..Short Wind	..Impotency
..Asthma	..Flat Feet	..Gastritis
..Obesity	..Stomach Disorders	..Heartweakness
..Headache	..Constipation	..Poor Circulation
..Thinness	..Biliousness	..Skin Disorders
..Rupture	..Torpid Liver	..Despondency
..Lumbago	..Indigestion	..Round Shoulders
..Neuritis	..Nervousness	..Lung Troubles
..Neuralgia	..Poor Memory	..Increased Height
..Flat Chest	..Rheumatism	..Stoop Shoulders
..Deformity (describe)	..Youthful Errors	..Muscular Development

NAME .....

AGE .....OCCUPATION .....

STREET .....

CITY .....STATE .....

Write Plainly

35 Miles per hour

Is Record of this Car

Boys, Build This Car. This nifty little car driven by gasoline motor, can be built by any boy. Parts are furnished by us and are very cheap. Send 26c for building plans and price list of parts showing how to build this lad's car.

SYPHER MFG. CO.
156 Warren Street
TOLEDO, OHIO.

GENUINE "COLT"

latest, safety model automatic pistols. .25 calibre, 7 shot, brand new, with usual "Colt" guarantee. Regularly retail at $20.00. Our special price $18.00, postpaid to any address. Immediate shipments while they last. Monongahela Novelty Co., Monongahela, Pa.

AN EASY WAY TO MAKE MONEY

Don't be content to plod along on a small salary. Be independent. Go in the tire repairing business. One man says "I made $60.00 the first day." Others average $200 to $500 a month. Very little capital needed. Jobs plentiful. Every motorist a possible customer. No experience needed. We teach you.

SHALER Tire Repair Outfit

Improved Wrapped Tread Method Used by Tire Manufacturers



Does as good work as the big high priced vulcanizing outfits. A boy can use it. It's the only vulcanizer that has Automatic Heat Control, and can't undercure or overcure a tire. Requires no watching or regulating.

FREE Book

"How to Open a Tire Repair Shop." It tells how to make big money. Don't delay. Write quick.

C. A. SHALER CO.
2205 Fourth St. Waupun, Wisconsin

Pocket Tool Chest

Strong Knife *Wire Pliers*
Leather Punch *Hoof Hook*
Swedging Awl *Wire Cutter*
Screw Driver *Screw Bit*
Alligator Wrench

9 Tools in 1

Elican Wunderknife

Each a strong, practical tool. As easily carried as a 3-blade knife, and has no more parts. Length, 4 in. Pliers and wire cutters are drop-forged tool steel — cut barbed fence wire as easily as 8-inch pliers. Blade is tempered cutlers' steel. Each tool works independently. Once used, always carried by **Electricians, Railway Men, Motorists, Mechanics, Horsemen, Sportsmen.**

Sent postpaid in U. S. for $1.75 (add 5c if insured). Highest quality construction, fully guaranteed.

Elican Specialty Co. 874 Merchants Bank Bldg. Indianapolis, Ind.

Chemical Tricks for Boys

Puzzle your friends with mysterious, harmless Chemical tricks. Four red, white and blue from a glass of water; write secret letters with invisible ink; write with water and have it turn blue, make your own blue ink or ink powder. You can have lots of real fun doing these tricks with "CHEMCRAFT" Junior, complete outfit shown at left. Send for yours right away and get a Free copy of "The Chemcraft Chemist," an interesting magazine for boys.

Amateur Chemist's Catalogue and Hand Book

containing valuable Chemical Information for Boy Chemists and listing many useful chemicals and apparatus, sent postpaid for 1w None free. Regular "CHEMCRAFT" Chemical Outfits, at $1.50, $2.00 and $5.00.

CHEMCRAFT JUNIOR

25¢ POSTPAID

The Porter Chemical Co.
Arcade Bldg., Hagerstown, Md.

TIRES at WHOLESALE

Not Seconds—Fully Guaranteed

Genuine "Capitol" or the new **"Rib-Skid" Beacon** Tires **$13.60** up. Red Tubes or **"Inside Armor" $2.90** up. Write at once for full description, **samples of material,** and "Direct-To-You" **wholesale prices** on these **absolutely First Quality Fully Guaranteed** 5000 mile Tires, Tubes, Armor, etc. Avoid tire trouble, and **save one-third your Tire expense by** sending **size of your tires** and name of car today.

MODERN TIRE CO.
659 7th St., Racine, Wis.

Says the Master Mechanic. The Greb Automatic Grip Puller is a One-Man Puller—Quick-acting, strong and simple in the extreme. May be locked in any desired position. A combination of two or three arms. Heavy Duty Size capacity 1" to 18"—Junior size capacity 1" to 7". Two sets of jaws furnished with each size.

Ten Days' Trial If your dealer or jobber does not have them we will send you one. Try it ten days. If not satisfactory, return to us and we will refund your money. We also make the GREB RIM TNOL.

THE GREB CO., 230 State Street, BOSTON



Mechanics' Utility

MOTOR GRINDER

A Time-Saver and Money-Maker For Shop, Factory, Garage or Home

Attach to any electric light socket and you have a power unit which will do grinding of all descriptions as well as drive small machinery. Can be furnished with chuck and buff for buffing.

Type B—Complete with 3" x 1-2" Emery Wheel, **$15.50**

Order today.

RACINE UNIVERSAL MOTOR CO.
53 W. Jackson Blvd. Chicago, Ill.

Listening to Theater Critics

(*Continued from page* 105)

are usually well patronized, by "between the acts" smokers and thirsty box holders, then phonograph selections are played thru the loud-talking telephones in the horns, and the public generally is pleased—both those that like music and the others, who will enjoy it anyhow. But the psychological moment always arrives, and we have our turn after the show when the horns are "unsuspiciously silent," while the audience files out, homeward bound, chatting among one another about the show, and incidentally handing out several hundred dollars' worth of valuable criticism and suggestions, which any theater manager would almost break his neck to overhear. But even tho his office has a screen door, or if he happens to adorn the passageway with his own graceful and frock-tailed form, he hears but little of real value.

Now, all is changed, however, for, thanks to the dictograph installation, our friend the theater manager can appease his heretofore unsatiated thirst for a knowledge of "what his patrons actually think of the performance" by simply manipulating a switch at his desk, which causes the voices, no matter how low they may be, to be picked up by the respective microphones switched into circuit, and reproduce loudly and clearly thru the loud-talking telephone in his office. In the summer when naturally the office would not be closed up so tightly, the regular head phones, which resemble the telephone operator's headgear or that of the wireless operator, may be used with exactly the same results. The advantage of the loud-speaking telephone for reproducing the conversations is that everyone does not care to be inconvenienced by placing a telephone receiver band on the head, especially when we think of some of our old-time friends—the theater managers, that we have met here and there, who like to, and mostly do, resemble some of our Fifth Avenue millionaires with their sporty neck-ties, spats and a one dollar Perfecto sticking nonchalantly in the southeast corner of their jibs; and then again, who in his wildest theatrical moments can even imagine a "regular" honest-to-goodness theater manager appearing *without* his silk hat, once he has left his hotel. Well, for these poor souls we will suggest that they have available a first-rate secretary who can record the conversation, or better yet, hook up an Edison dictaphone (phonograph) to the horn of the loud-talker and record the various criticisms, so that they can be reproduced later and studied more closely at leisure.

We should imagine that such an arrangement as this will be very valuable indeed to the modern theater, where the movement toward establishing desirable plays, etc., is being brought to more nearly meet the exact wants of the theater-going public. In other words, the American theater manager has for a long time been seeking for every possible opening to gain a more perfect relation between the box office and the patron of the theater, and well this might be so, for if a performance is such that it does not suit the people at the time the play is produced, then there is no use expending additional sums in trying to foist the unwanted play on the theater-going public. Sometimes, however, in the past, and, in fact, it may be said in most cases, one of the chief reasons for the failure of a dramatic or other play, has been that the manager and producers could not quickly enough ascertain the exact feeling or obtain a comprehensive survey of the collective ideas of the audiences viewing the first performance of the play until it was too late.

Earn $35 to $100 WEEKLY

ALL OR SPARE TIME

You can make $35.00 to $100.00 a week. I want hustlers, money-makers, to work with me, to advertise, sell and appoint agents. Biggest thing in years. City conveniences without plumbing. Used in any room. Sells on sight. **Demonstrating tub furnished.** Folds small, self-emptying, non-leakable. Guaranteed 10 years.

FOLDED

AGENTS MAKE SALES EASILY

Two sales daily means $60.00 a week. Leggett, Ohio, "Worked two hours, took two orders, profit $10.00." Hayhurst, Nebr., "Took 11 orders in 4½ days—profit $55.00, ordered 12 more tubs." Manning, Iowa, "Sold 10 tubs in one day—profit $50.00." DeHut, Nebr., "Sold 12 tubs in three days—profit $60.00." And hundreds of others making big money. 70 per cent of homes have no bath tubs. Experience and capital unnecessary. Credit given to the right man. Get full particulars and "special plan;" all FREE.

H. S. Robinson, Pres., THE ROBINSON CABINET MFG. CO.
4980 Factories Building TOLEDO, OHIO

THE MIDGET SLIDE RULE

has many exclusive features. It handles three factors at one setting. It has a Log-Log Scale, Polyphase or Inverted Scale, Addition and Subtraction Scale, Square Root Scale, Log. Scale and Binary Scale and the Midget is equivalent to all of these types of straight slide rules. This rule will add and subtract, multiply and divide fractions and mixed numbers without changing them to decimals. Also gives Logarithms, Sines, Tangents, Cosines, Cotangents and the decimal equivalents of fractions. An instruction book, "The Slide Rule Manual," 16 pages, 12 illustrations, is sent with each rule. Diameter of rule, 4 inches. Logarithmic Scale, 12 inches long. Made in two models: Metal (white coated steel), **$1.00** each; White Celluloid, **$1.25** each. Genuine Leather Carrying Case **50c** extra. Circulars Free. Your money back if you are not satisfied.

Gilson Slide Rule Co., Niles, Mich.

Build Your Own PHONOGRAPH,

It's Easy With Our Help

A few hours interesting work saves many dollars and gives you a machine exactly to suit your ideals. We furnish motors, tone arms, case material, blue prints and full instructions. Plays any record. You can make fine profit building phonographs for your friends.

Write Today for Our Free Blue Print Offer. Agents wanted for our ready built Choraleons.

SAVE OVER HALF

Choraleon Phonograph Co.
706 Monger Bldg., Elkhart, Ind.

NATIONAL TRADE DENTAL SCHOOL

506 S. Wabash Ave., Chicago, Ill.

LEARN MECHANICAL DENTISTRY—DEMAND UNLIMITED

A paying professional trade: You will be a trained dental mechanic and receive our diploma when competent. Students given advantage of thoroughly up to date laboratory, and services of graduate Dental Surgeons on practical cases. No effort spared to place graduates advantageously. No age limit. Day or Evening. Individual instruction. No educational requirements. No book or home study. Easy terms. Highest references. Especially attractive proposition to those who write at once for catalog H.

EXPERIMENTS

In—Science, Electricity and Invention
256 Pp., by P. Edelman, $1.50 Ppd.

Here is the big illustrated

how to make and do it book you want. Full of stunts, home laboratory wonders, models, etc.

Edelman Publishers, 1802 Hague Ave., St. Paul, Minn.

SIGNAL ENGINEERING

$90 to $250 a Month

Free Book Tells How

Write today for this big, new Free Book on SIGNAL ENGINEERING

Railroads need men for this important work. Big positions open throughout United States. Big Free Book tells all about it—tells how you can get the exact training you need. Write for it—

Today—Now! **Dept. of Signaling, Room A 179 1810 Wilson Av. Chic.**

DENINGER WILL SAVE

$40

BIG MONEY SAVINGS FOR YOU

Used and rebuilt motorcycles, single and twins, $25 to $100. Used bicycles, $5.00; tandems, $10. All machines guaranteed in good working order. New bicycles and motorcycles at Factory prices. You save dealers' profits. Motorcycle and automobile tires too, $3.00. Complete line of parts and supplies.

Send for catalog

Deninger Cycle Co., Rochester, N.Y.

YOU 25 TO 50 DOLLARS



Printing Cheap

Cards, circulars, labels, book, paper. Press $6. Larger $20 Job press $85 up. Save money. Print for others, big profit. All easy, rules sent. Write factory for press catalog, TYPE, cards, paper. **THE PRESS CO. D-47 Meriden, Conn.**

Experimental Mechanics. Twist Drills

(*Continued from page* 127)

With this information on hand and a little practical experience on the subject, there should be no difficulty for the novice to become thoroly familiar with the handling of twist drills.



Fig. 4

If the Cutting Lips of the Twist Drill Are Ground of Uneven Length, the Hole Will Be Enlarged Over the Diameter of the Drill.

Average Cutting Speed for Drills In Revolutions Per Minute.

The following table represents the most approved practise in rate of cutting speed for drills ranging from $\frac{1}{16}$ inch to 2 inches in diameter:

Diameter of Drills	Speed on Steel	Speed on Cast Iron	Speed on Brass
1/16	1,712	2,383	3,544
1/8	855	1,191	1,772
3/16	571	794	1,181
1/4	397	565	855
5/16	318	452	684
3/8	265	377	570
7/16	227	323	489
1/2	183	267	412
9/16	163	238	367
5/8	147	214	330
11/16	133	194	300
3/4	112	168	265
13/16	103	155	244
7/8	96	144	227
15/16	89	134	212
1	76	115	191
1 1/16	72	106	180
1 1/8	68	102	170
1 3/16	64	97	161
1 1/4	58	89	150
1 5/16	55	84	143
1 3/8	53	81	136
1 7/16	50	77	130
1 1/2	46	74	122
1 9/16	44	71	117
1 5/8	40	66	113
1 11/16	38	63	109
1 3/4	37	61	105
1 13/16	36	59	101
1 7/8	33	55	98
1 15/16	32	53	95
2	31	51	92

(The next article of "Experimental Mechanics" will appear in the July issue)

FRANCE BUYS BIG U. S. BORDEAUX RADIO STATION

Virtual demobilization of all the United States naval establishments in European waters, the sale of the great Lafayette wireless station at Bordeaux to the French government at a price of approximately $4,000,000 and many hitherto unpublished facts of American naval activities in the war, were announced recently by Assistant Secretary Roosevelt.

"The great Lafayette radio station near Bordeaux was intended to insure communication between Washington and the army and navy in case the cable systems were put out of commission or interfered with by German submarines. It has eight towers and could communicate with the United States day and night. It was built by the navy. I arranged with the French government that we shall complete the station, which is two-thirds finished, and they will take it over at what it cost us, about 22,000,000 francs," said Mr. Roosevelt.

SINCE 1880—

For two generations we have been making fine precision instruments—building them to the Starrett standard—not to a price.

Today the name Starrett is recognized the world over as standard for accuracy. Starrett Tools are helping skilled mechanics produce high-quality work.

Write for Catalog No. 21 L E.

THE L. S. STARRETT COMPANY

The World's Greatest Toolmakers.
Manufacturers of Hack Saws Unexcelled.

Athol, 42-901 **Mass.**

STARRETT TOOLS

DEPENDABLE KNAPP ELECTRIC SPECIALTIES

Motors and Electrical Specialties Are Best



Knapp Goods have stood the test for 29 years. No detail in construction has been spared to make them the best that money can buy. The complete Knapp line includes Toy and Power Motors, Generators and Dynamos. Specialties and Novelties that amuse and instruct, Fans, Rheostats, Compasses, etc. And Knapp prices are always lowest. Always insist on Knapp Goods.

KNAPP DYNAMO MOTOR

Will electroplate, charge storage batteries, run lamps, motors, train of cars, induction coils,—in fact, the number of experiments it can be used for is unlimited. Runs on 4 to 6 Volts or can be connected to run on 110 Volts through a transformer.

Price, Complete, $7.00

KNAPP "LEARNELECTRICS"

A complete Electrical Laboratory, including a very valuable instruction book by H. P. Gorman, A.I.E.E. Covers all subjects clearly and concisely.

The Laboratory includes a choice collection of instruments, materials and interchangeable parts.

Price, Complete, $3.50

Order to-day. Or your dealer can secure them for you. DESCRIPTIVE CIRCULAR and CATALOG of celebrated Knapp Motors and Electrical Specialties from 10c up mailed FREE on request.

Knapp Electric & Novelty Co. **523 West 51st Street N. Y. City**

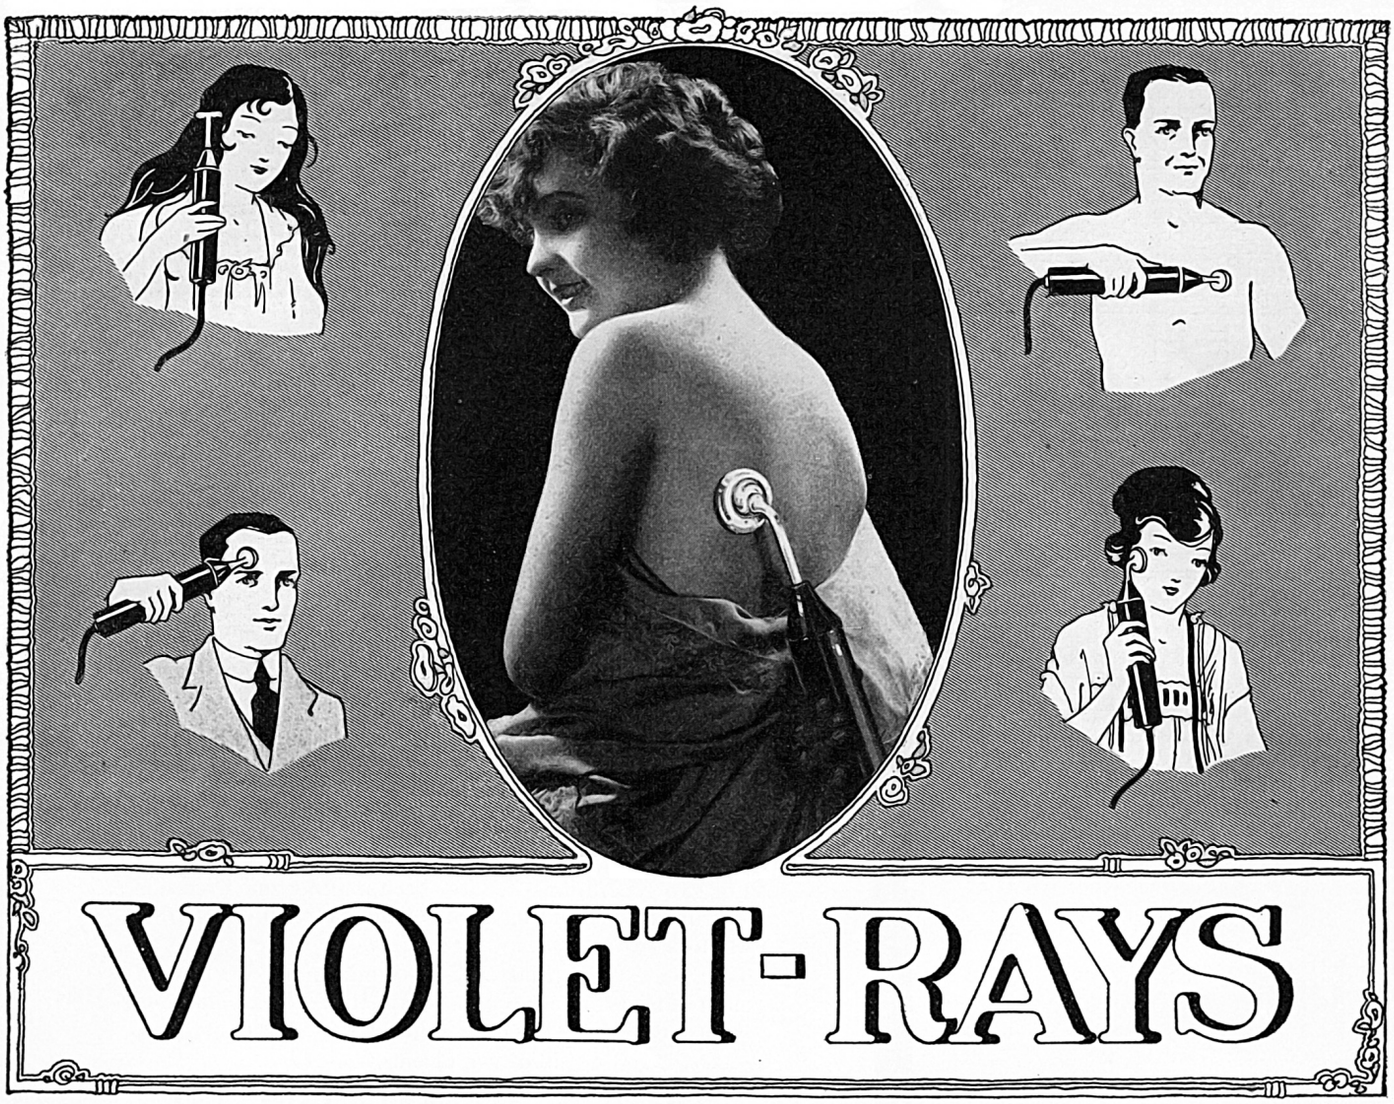

VIOLET-RAYS

The Magic-like Reliever of Pain. The Marvel of the Age for Rheumatism, Neuralgia, Neuritis, Arteriosclerosis, Hemorrhoids, and Practically Every Other Ailment to Which Flesh is Heir. A Wonderful Beautifier Too! Amazing in the Treatment of Eczema, Blackheads, Wrinkles, Falling Hair, Dandruff, and Every Other Faulty Condition of the Skin and Scalp!

10 DAYS FREE IN YOUR OWN HOME

See for yourself the miracular like results of Violet-Rays. Get the wonderful Violetta Violet-Ray Machine for 10 days' free use in your own home. Give yourself exactly the same Violet-Ray treatments for which eminent physicians and beauty specialists charge big fees. Note the marvelous relief that comes even with the first treatment. See how you can virtually feel the Violet-Rays reaching to the very root and cause of any ailment with the great curative forces of Heat, Light, Electric Energy, and Ozone. See too how Violet-Rays youthifies the skin, purifies the scalp and stimulates hair-growth. Note above all how refreshing the effect of Violet-Rays to mind and body—how invigorating and vitalizing—how much better you work, eat and sleep. Prove all these benefits to yourself without obligation. Try the Violetta for 10 days free, and if you are not more than amazed and delighted, simply send it back.

BLEADON-DUN CO., Dept. 2E,
326 W. Madison St., Chicago, Ill.

Please send me your free book and 10 days' free trial offer on the Violet-Ray Machine. Also full information as to treatment for ailments marked below.

Asthma	Earache	Piles
Barbers' Itch	Eczema	Paralysis
Boils	Eye Diseases	Pimples
Blackheads	Headache	Pyorrhea
Bunions	Hay Fever	Rheumatism
Callous	Goitre	Skin Diseases
Chilblains	Insomnia	Sore Throat
Colds	Lumbago	Sprains
Corns	Nervousness	Tonsilitis
Constipation	Neuralgia	Whooping Cough
Dandruff	Neuritis	Warts and Moles
Deafness	Obesity	

Name .....

Address .....

City ..... State

BOOK FREE

Write today without fail. Mail coupon or just a postcard. Let us send you our beautifully illustrated free book, describing the Violetta in detail. Read the amazing phenomena produced by Violet-Ray High frequency current. Why it produces stimulation and sedation. How to give spinal treatments with the Violetta, how to treat various ailments, including nervous troubles, rheumatism, obesity, hay-fever, skin treatments, facial treatments. With the free book we will also send you particulars of our special free trial offer. Mail coupon or postcard now.

BLEADON - DUN CO.

Dept. 2E 326 W. Madison St., Chicago, Ill.

Electrical, Drug and other Jobbers and Dealers: Write us today for our Co-operative Selling Plan.

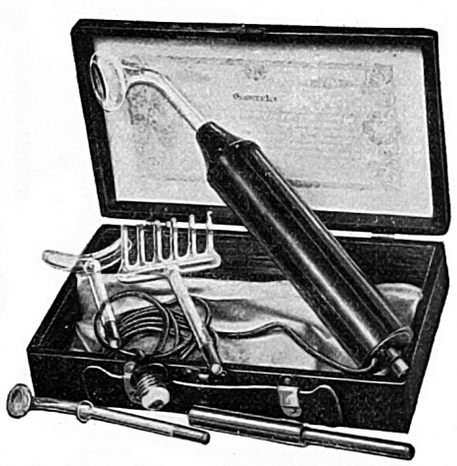

Not a Vibrator

The Violetta is not a machine that contracts the muscles—it does not shock, it does not pound the muscles—it is absolutely painless. Violet Rays administered by the Violetta are wonderful even for infants!

This advertisement copyright 1919, by Bleadon-Dun Co

In this Department we publish such matter as is of interest to inventors and particularly to those who are in doubt as to certain Patent Phases. Regular inquiries addrest to "Patent Advice" cannot be answered by mail free of charge. Such inquiries are publisht here for the benefit of all readers. If the idea is thought to be of importance, we make it a rule not to divulge all details, in order to protect the inventor as far as it is possible to do so.

Should advice be desired by mail a nominal charge of $1.00 is made for each question. Sketches and descriptions must be clear and explicit. Only one side of sheet should be written on.

How to Finance and Manufacture a Patent*

By Jay G. Hobson

This article is dedicated to the interest of inventors and people with commercial ideas who are inexperienced in the financing and marketing of commercial products. It tells of a practical plan that made one invention successful. It is written with the intention that it will benefit each reader financially, and will assist him in avoiding the many pitfalls encountered along the road to success.—THE AUTHOR.

MOST people think of inventors as geniuses parturient to some brilliant idea suddenly caught from the air and patent it in workable form. However, this is not the case, for as Thomas Alva Edison, the great inventor, declares: "Genius is one per cent inspiration and ninety-nine per cent perspiration," and "The three essentials to secure anything worth while are, first, hard work; second, stick-to-it-iveness; and, third, common sense."

Edison's inventions have been the result of many experiments, and exacting judgment. He has always sought to produce things that were necessities, which would benefit the masses; consequently, his wonderful success.

The first important step in financing and marketing an invention is, positive conviction that you have discovered something that is practical, not only from a manufacturing point of view, but also from the public's point of view—for it is the co-operation of the public (your eventual customers) that will insure your success. To secure the co-operation of the public, and to sell your invention, be positive you have something to offer that the public needs and demands. Then, after you have made your article commercially practical, prepare it for the market in a convenient form, that will offer the least resistance to the consummation of a sale.

Investors or people with capital (who want to assist you financially in marketing your product) observe your invention and are of the same frame of mind toward it as the public—your ultimate customers. Investors scrutinize the practicability of the commercial side, as well as the production or manufacturing side; however, they are generally more interested in the commercial side of an article, for there is the source of large profits.

Obtaining financial backing for your invention is a serious undertaking. Investors demand facts, proof, conviction, before they will take the business venture necessary for the success of a new idea. Investors are the pessimists, so to speak, while inventors are the optimists. The inventors who succeed with their figments are greater optimists than men with money are pessimists. Conviction, confidence and enthusiasm will convert the most skeptical. Get the confidence of men with money and you will get their assistance.

Men who are successful say that the shortest route to commercial success is thru the example proven by those who have gone before. While modern business necessitates individual plans of operations, yet what one man or firm did to succeed others can duplicate. Therefore, the plan employed to finance and market one invention should help finance another. Experience proves that a patent is as valuable as the inventor or his associates make it—that completing a working model of an invention and securing the patent rights upon same are only the preliminary steps to success. The greatest obstacles lie ahead in the financing, manufacturing and marketing of a new article. It is the commercial wilderness that every new manufactured product must cross before reaching that summit of success desired by all.

It matters not how wonderful or unique an invention may be, it must be serviceably made, intelligently financed and greatly ad-

*** Owing to the publication this month of the promised article—"How to Finance and Manufacture a Patent" by Mr. Hobson, the Questions and Answers on Patent Advice are omitted.**

U.S. PATENTS

Don't Lose Your Rights

Before disclosing your invention to anyone send for blank form "Evidence of Conception" to be signed and witnessed. A sample form together with printed instructions will show you just how to work up your evidence and establish your rights before filing application for patent. As registered patent attorneys we represent hundreds of inventors all over the U. S. and Canada in the advancement of inventions. Our schedule of fees will be found reasonable. The form "Evidence of Conception" sample, instructions relating to obtaining of patent and schedule of fees sent upon request. Ask for them,—a post card will do.

LANCASTER & ALLWINE

255 OURAY BLDG.,
WASHINGTON, D. C.

PATENTS

TO THE MAN WITH AN IDEA

I offer a comprehensive, experienced, efficient service for his prompt, legal protection and the development of his proposition.

Send sketch, or model and description, for advice as to cost, search through prior United States patents, etc. Preliminary advice gladly furnished without charge.

My experience and familiarity with various arts frequently enable me to accurately advise clients as to probable patentability before they go to any expense.

Booklet of valuable information and form for properly disclosing your idea, free on request. Write today.

RICHARD B. OWEN, Patent Lawyer
164 Owen Building, Washington, D. C.
2276-8 Woolworth Bldg., New York City

PATENTS TRADE-MARKS AND COPYRIGHTS

Before disclosing an invention, the inventor should write for our blank form "EVIDENCE ON CONCEPTION." This should be signed and witnessed and if returned to us together with model or sketch and description of the invention we will give our opinion as to its patentable nature.

Our illustrated Guide Book, HOW TO OBTAIN A PATENT, sent Free on request. Contains full instructions regarding Patents, Trade-Marks, Foreign Patents, Our Methods, Terms and 100 Mechanical Movements illustrated and described. Articles on Patent Practice and Procedure, and Law Points for inventors.

An actual search of United States patents made in all cases before preparing application for patent

Electrical Cases a Specialty **Highest References** **Prompt Attention** **Reasonable Terms**

FREE COUPON!

VICTOR J. EVANS & CO., Patent Attorneys

New York Offices: 1001 to 1007 Woolworth Bldg.
Pittsburgh Offices: 514 Empire Bldg.
Philadelphia Offices: 135 S. Broad St.
Main Offices: 779 Ninth Street, N. W., Washington, D. C.

Name..... *Address*.....

PATENTS COPYRIGHTS TRADE MARKS DESIGNS

U.S. PATENTS

Our facilities for securing patents enable us to give prompt and reliable service at reasonable rates. Inventors are invited to write to us regarding questions appertaining to securing patent protection. All matters receive prompt attention. Send sketch for preliminary examination.

Books free on request

A. M. BUCK & CO.

Patent Attorneys

205 Second National Bank Bldg., Washington, D. C.

PATENTS

LACEY & LACEY

Attorneys-at-Law—Patent Practice Exclusively
Solicitors of
U. S. and Foreign Patents
Trade-Marks, Copyrights

639 F Street, N. W., Washington, D. C.

Write Us for Our Free Inventors' Book
PATENT-SENSE
ESTABLISHED 1869

PATENTS

INVENTORS: Send us sketches or a model of your invention and a description of the device for advice in regard to the best way of obtaining patent protection. Our practical experience covers a period of twenty years. Our hand-book on patents is sent free on request. All communications strictly confidential. Write us today.

TALBERT & TALBERT
Patent Lawyers
4287 Talbert Bldg. Washington, D. C.

Competent Patent Service
By a Former Examining Official of the U. S. Patent Office
NORMAN T. WHITAKER
Lawyer and Engineer
480 Whitaker Bldg. Washington, D. C.
Branch Office, 87 Nassau St., New York City.
INQUIRIES INVITED

Patents Promptly Procured
Send sketch or model for actual search of U. S. Patents. Highest references. Personal service. Moderate fees. Write for Free Patent Book.
GEORGE P. KIMMEL, Patent Lawyer
99-U Loan & Trust Bldg. Washington, D. C.

PATENTS
Inventors Invited to Write for Information and Particulars
Highest References. Best Results.
Promptness Assured.
WATSON E. COLEMAN
Patent Lawyer
624 F Street N. W. Washington, D. C.

vertised to make the inventor money. The public must be educated to the need of a new article before they will buy it. Few inventors appreciate these facts, and are of the opinion that all they need do is to conceive some new, useful improvement, patent it, and their fortune is made; but unfortunately this is not true. It is only the beginning of a difficult undertaking. An inventor should be as good a salesman as he is a mechanic. The public must be convinced before they will invest. The better the salesman, the greater the financial backing. Inventors should sell themselves the merits of their invention before attempting to sell others. With the backing of the convictions that you have a good thing—it will make the convincing of others an easy matter. Confidence and credit in the commercial world are more valuable than gold itself.

Only one who has gone thru a successful patent experience can adequately advise others how to succeed. For the benefit of my readers who may desire to finance a new proposition, I will enumerate the steps thru which I brought my first invention to success. It may help point the way for others.

After I had been granted full protection on my invention for a period of seventeen years, and had settled with my patent attorney for his services, it suddenly dawned upon my elated conscience that my patent certificate, with its big red seal, was not cashable like a Government bond; but, that it was only the foundation and beginning of a steep, rocky road to fame and fortune. I had spent most every cent for my patent rights and a demonstrating model of my invention. I had no money to promote the sale or manufacture of same, but I did possess an abundant confidence in its usefulness and ultimate success, if only I could secure financial backing to put it on the market before the buying public.

As it stood it was absolutely valueless to me. One of two things was necessary for its success. Either I must sell it to some one with money, or raise the capital to manufacture it myself. My friends urgently advised me to sell for any fair profit above my actual cost, saying: "It was better to accept a profit regardless of size than possibly fail in securing sufficient capital for marketing it."

Thru courtesy I listened to all this sincere advice, but was of the same opinion still—that my invention filled a long-felt public want. It was a necessity that could be made easily and profitably. I determined to stick to the first meritorious product of my brain and if possible raise the money that would enable me to place it for sale before the world. I knew that success only waited upon the introduction of my discovery to those for whom it was intended. But how best to accomplish this seemingly impossible task and overcome the colossal obstacles that were in evidence, forced me into quite a quandary.

However, remembering the old adage, "Where there is a will, there is a way," spurred me on to greater hopes for the success of my invention. I decided to tackle this proposition for all it was worth, and reap the benefits that were justly mine.

At that time I was a typical amateur in the mysteries of finances. I could not afford to make mistakes and knew few plans to pursue in obtaining the required finances for marketing my invention. Several plans came to my mind, such as borrowing the capital from relatives or friends, giving my patent as security for the loan; organizing a stock company and selling shares of stock to raise the money; or, advertise and sell part interest in my patent to some one, honest and reliable, who would agree to buy only a minority interest, thereby giving me control and protection against loss—for I was determined that I would not be frozen out by a partner.

PATENTS

Hand Books on Patents, Trade Marks, etc., sent free. Our 70 years of experience, efficient service, and fair dealing, assure fullest value and protection to the applicant. The Scientific American should be read by all inventors.

MUNN & CO., 622 Woolworth Bldg., N. Y.
Washington Office, 622 F St., Washington, D. C.

MATHEMATICS MADE EASY



The Arcascope—the Combination Triangle with a Brain—will multiply, divide, figure percentage and proportion, solve all problems in trigonometry and geometry, draw symmetrical figures, plot arcs, etc. Superior to any slide rule. Simple to operate. Also includes a TRANSPARENT TRIANGLE, PROTRACTOR and THREE RULES. Used at Columbia University, West Point, U. S. Aeronautic Schools, etc. Only 85 cents Postpaid. Order today before you forget.
Dept. J. L. J. LEISHMAN CO., Ogden, Utah

NOW PAID $100 FOR ONE DRAWING

You can become an artist, illustrator or cartoonist even if you now have no talent. Earn $25 to $100 a week. Write for Free Outfit offer and beautiful new book, "HOW TO BECOME AN ARTIST." Address
WASHINGTON SCHOOL OF ART., Inc.
1420 H Street, N.W. Washington, D.C.

BUILD A $100 PHONOGRAPH

Assemble your own Phonograph
Do it yourself easily. Have the finest machine. Astounding saving. We give you the phonograph secrets. Complete instructions 10 cents.
ELECTRO MECHANICAL PARTS CO.
160 N. Wells St. CHICAGO

Electricians Get up-to date in HOUSE WIRING! Save TIME, MONEY, LABOR and MATERIAL by using our 98 GENUINE BLUE PRINT DRAWINGS, containing all the latest diagrams and connections known in house wiring—every diagram and connection up-to-the-minute as used by first class electricians for wiring BELLS, BURGLAR ALARMS, LIGHTS, ANNUNCIATORS, FIRE ALARMS and ELECTRIC GAS LIGHTING. These drawings are bound in the form of a flexible book [9 x 12] for convenience in using on the job. Send for them, and if they don't make you more efficient as a wireman and save you many times their cost as a contractor, return them and money will be refunded—you can't afford to be without them. ONE DOLLAR postpaid. Send for circulars on other sets of drawings.
PATENT SPECIALTY COMPANY
P. O. Box No. 583 San Francisco, Cal.

POPULARITY FOLLOWS THE UKULELE

If you play quaint, dreamy Hawaiian music or latest songs on the Ukulele you will be wanted everywhere. We teach by mail 20 simple lessons; give you free a genuine Hawaiian Ukulele, music, everything—no extras. Ask us to send the story of Hawaiian music. You will love it. No obligation—absolutely free.
The Hawaiian Institute of Music
1400 Broadway, Suite 1106, New York

Are You Preparing

for one of the thousands of opportunities waiting for folks who get ready? Develop that "Dormant Talent" in you, to the point where you will see opportunities. Our plan (worth hundreds) costs you $5.00—send Post Office or Express Money Order now.
STUDENT HELP BUREAU Springville, N. Y.

A NEW AND EASY WAY TO PAINT
SIGNS and SHOW CARDS
OUR PATTERNS DO THE WORK

No experience required. Anyone can paint all kinds of signs, banners, cards, etc., on any surface with our new and easy system of lettering. Complete outfit containing eight alphabets of letters, assorted styles and sizes from two to twelve inches high, also four sets of figures, etc., not printed but life size patterns cut out of durable tag board which can be used over and over again for years, also brushes, colors and book of instructions. **$7.50**
Satisfaction guaranteed. PREPAID ------
ACME SALES CO., Empire Bldg., Denver, Colo.

MAKE A MOTOR-CYCLE OUT OF YOUR BICYCLE

with a STEFFEY MOTOR. Easy to attach. Fits any wheel. More STEFFEY'S in use than all others. Send stamp for circulars and low factory prices
Agents wanted.
STEFFEY MFG. CO.
Dept. E. 5025 Brown St., Philadelphia, Pa.

STAMPS

50 diff. Belgium (large bi-color), China, Jamaica, Portugal, Venezuela, etc., 10c; 100 diff., nice packet, 20c; 1,000 well mixed, 40c; 100 var. U. S., 50c; 1,000 hinges, 10c; Agts. wanted, 50%. List free. I buy stamps. L. B. Dover, Overland, Mo.

The first plan had its precipitous faults. Relatives as a rule do not make good creditors and seldom appreciate their kin's abilities in business. The second plan meant immediate cash for incorporation of a company, as well as a long drawn out, expensive stock. selling campaign, with capital possibly coming in by dribbles. The third plan appealed to me more favorably. I decided to put forth my best efforts toward this method of placing my invention on the market. How and where to find the investor with the cash who would be willing to invest under the above conditions proved to be my greatest problem. After considerable deliberation, after several demonstrations and interviews with business men whom I knew, I was convinced that the quickest and cheapest way to find *that* person with the idle cash and confident enough to take a legitimate business chance with me, was to advertise in some good newspaper or magazine, under "Business Chance." This I forthwith started and used the following advertisement:

"Wanted, a capable business man with capital to take substantial interest in patented meritorious invention. This is a public necessity that should make fortune for manufacturers. If qualified, address ———, etc."

The above advertisement cost about $1.00 per issue under classified position in a paper having a weekly circulation of upwards of five hundred thousand copies. The first replies were somewhat disappointing. But, believing I was headed right, I continued the advertisement for a few weeks, and one day I received an inquiry from a man who had ready cash, and sufficient optimism to back me up in my great ambition. For $2,000 cash I sold him forty-five per cent interest in my patent right (leaving me fifty-five per cent, or control). With this nest egg in the company's treasury we proceeded to gather all the information that we might need in the manufacturing and marketing of our invention.

First, we decided upon a firm name suitable to the article. Then we arranged with a machinery company to construct the machinery needed for quantity production. We called on the supply houses and secured their lowest prices on material for making our product. We arranged for the printing of circulars, letterheads, envelopes, bill heads, statements, etc., that would be needed for our office. From a bookkeeper friend we learned books required for our business and how to keep them correctly. We called on the wholesale and retail deal-

(*Continued on page* 181)

Hunting Submarines by Sound

(*Continued from page* 111)

"Ship ahoy!" came from the masthead.

"Where away?"

"Two points on the starboard bow, sir. Looks like she was heading this way."

The Ear Beats the Eye.

This vessel had been detected by sound waves traveling thru the water, her course and speed had been accurately charted *and her exact position* within one point of the compass had been determined *more than an hour before the vessel itself had become visible over the horizon.*

"It's almost perfect," said one of the naval engineers in an undertone. The tension under which they had worked for hours suddenly relaxed. The ship's crew gathered in groups to talk it over. There was not a dissenting opinion. The secret of detecting the presence of an unseen vessel had been solved!

DETROIT

the Automobile Center of the World is the Logical Place to

LEARN AUTOMOBILE ELECTRICS

Training for Head and Hand

Auto Electricians are in big demand everywhere. Interesting work—big salaries—exceptional opportunities for advancement. Every garage, factory and service station needs one or more good men. Also splendid opportunities to open electrical service stations and make big money. Cars need constant attention. Nearly all the trouble is electrical. Six million cars now in use—a million and a half new ones will be put in service this year. That means thousands of trained men will be needed. Men trained in Detroit get the preference.

NOT A "ONE MAN SCHOOL"

The M. S. A. S. embodies the best ideas in the Auto Industry. No other school offers such an advantage as this school here in Detroit. School open all the year, enter classes any day.

KING MOTOR CAR COMPANY

BUILDERS OF KING CARS — DETROIT, U.S.A.

Replying to a recent letter addressed to Mr. Artemas Ward making inquiry as to the reputation of the Michigan State Auto School, will say that as far as we know all Detroit Automobile manufacturers endorse the work they are doing.

It is managed very efficiently and they have been turning out some pretty good men for the automobile industry, and cannot see any reason why you should hesitate about taking a course with this Institution.

Yours very truly,
KING MOTOR CAR COMPANY.

MONEY-BACK GUARANTEE

We guarantee to qualify you for a position as chauffeur, repair man, tester, demonstrator, auto electrician, garage man, automobile dealer, Aeroplane motor mechanic or tractor mechanic and operator, paying from $100 to $400 monthly or refund your money.

Be An Auto Electrician
Earn $200 to $500 Monthly

If you are electrically inclined this is your best opportunity. Our complete Auto Course trains you thoroughly in Auto Electrics. You can hold down **any** job or run a business of your own. You make more money because you can locate trouble quickly, without waste of time. All your time is spent repairing the trouble—not looking for it. Our successful graduates are in every part of the world.

Auto Factories Heartily Endorse Our School

They not only endorse the M. S. A. S. but they also give us hearty co-operation. They employ our students while taking course and after they graduate. We have the latest model chassis for students to work on. In this way our students get best possible training in most practical manner.

"School News" and 176 Page Catalog FREE

Just off the press. Gives complete information. Quotes dozens of letters from students who have actually done what you would like to do. What better proof do you want that YOU can do it? You CAN! — but get busy. "Jump" a train and come to Detroit. Hundreds have done it and made good. Will help you get a job if necessary to pay expenses while taking our course. Get action NOW.



Michigan State Auto School The Old Reliable School
666 Auto Bldg. Detroit, Mich. U. S. A. A. G. ZELLER, Pres.

Earn $35 to $100 a Week

As a Mechanical Draftsman

Thousands of Men Needed

YOU can learn Mechanical Drawing at home in your spare time through our practical Home Study Course and qualify for Big Pay. We have placed hundreds of our students in good paying positions. Government departments and private concerns are continually calling upon us for our graduates. Peace means a bigger demand for draftsmen than ever before. Prepare now and be ready when this demand reaches its height.

Become a Chief Draftsman

and get to the very top in this well-established and rapidly growing profession. The training given by the Columbia School of Drafting will give you just the knowledge you need to make good as a Chief Draftsman. No previous training is necessary. You can begin our course now and make rapid progress from the start by mail under the Personal Instruction of the President of the School, Mr. Claflin. His carefully prepared lessons and personal letters of advice make each step easy and interesting.

Draftsmen Now Getting $35 to $100 a Week

with big chances for better pay as the demand grows. All big engineering, construction and manufacturing projects must first go through the drafting room before the workmen can commence. All such enterprises depend upon large numbers of draftsmen. Salaries are advancing steadily.

Drawing Outfit Free With Our Course

Free As soon as you enroll you will be sent our drawing outfit for your own use throughout the course. This entire outfit will be yours to keep. You are not obliged to return it after completing the course.

We Will Help You Secure a Position

as soon as you complete our course. We have already placed hundreds of our graduates in good paying positions and are constantly in touch with vacancies for which draftsmen are urgently needed.

Illustrated Catalog FREE

Free Simply fill in the coupon below, return it to us and we will send you free a copy of our illustrated catalog which tells all about our practical Home Study Course and how you may secure our instructions at once on easy terms so as to quickly qualify for one of the big positions open.

Send This Coupon Today

COLUMBIA SCHOOL OF DRAFTING.
Dept. 982, 14th and T Sts., Washington, D. C.

Without obligation to me, please send me your illustrated Catalog and tell how I may secure your practical training in Drafting and your help in securing a position as Draftsman.

Name .....
Address .....
City..... State.....

The ships steered back to Nahant. A long-distance call was put in for the Navy Submarine Base at New London.

"Rush three submarine chasers to Nahant at once."

In due time they appeared. The party started out again, were joined by submarines from the Boston Navy Yard, and anchored off the Massachusetts coast line.

One submarine at a time submerged. The subchasers equipt with detectors followed her every movement, charted her position, reported to each other by special signal devices, and when everything was in readiness rushed to a spot just over the "sub." Dummy depth bombs were dropt. The submarine rose to the surface. *She had been within a few feet of her charted position.*

And now the apparatus was about to demonstrate its most valuable service. A series of practical tests proved beyond the possibility of a doubt that the detector could successfully differentiate between the sounds made by surface craft and the sub. The submarine's noises were distinctly peculiar to itself and the instrument translating this sound to the trained ear brought home the message just as you, when you pick up the long-distance telephone receiver, can identify the voice at the other end of the wire.

The Submarines On the Phonograph.

The Victor Talking Machine Company was now called upon for its contribution to the invention. *Phonograph records of the various sounds heard by the observer were made and catalogued,* thus presenting a complete record of the accomplishment of the device. The records were used principally in training students to identify the submarine noises and detect the difference between submarine and surface craft.

Further tests were made. Shore listening stations were set up. During the night trained men sat and listened to vessels going in and out of Boston harbor. The Navy attempted to slip a submarine thru the harbor entrance one night, but the craft was detected at once and a full report of her activities was sent to headquarters a few hours later. Not a ship could enter or leave Boston without being heard. In fact, so sensitive was the instrument that *trained listeners could accurately identify a ship by name,* once having heard her, the engine characteristics of different ships being plainly audible and distinctive.

It was estimated that in December, 1917, *two to five enemy submarines past thru the English Channel daily.* After July 1, 1918, only *one* submarine is known to have done so. In June the Admiralty estimated that *one out of every four submarines was destroyed.* In October the ratio had been increased to five out of every twelve. By this summer British and American naval officers believe three out of every four submarines would have been destroyed. These results were largely due to the perfection of "listening devices."

Hundreds of British craft and most of the American forces were now equipt with the submarine detector. Many French and Italian vessels were also using it. The "submarine hunt" was on in earnest.

About May, 1918, the American ships

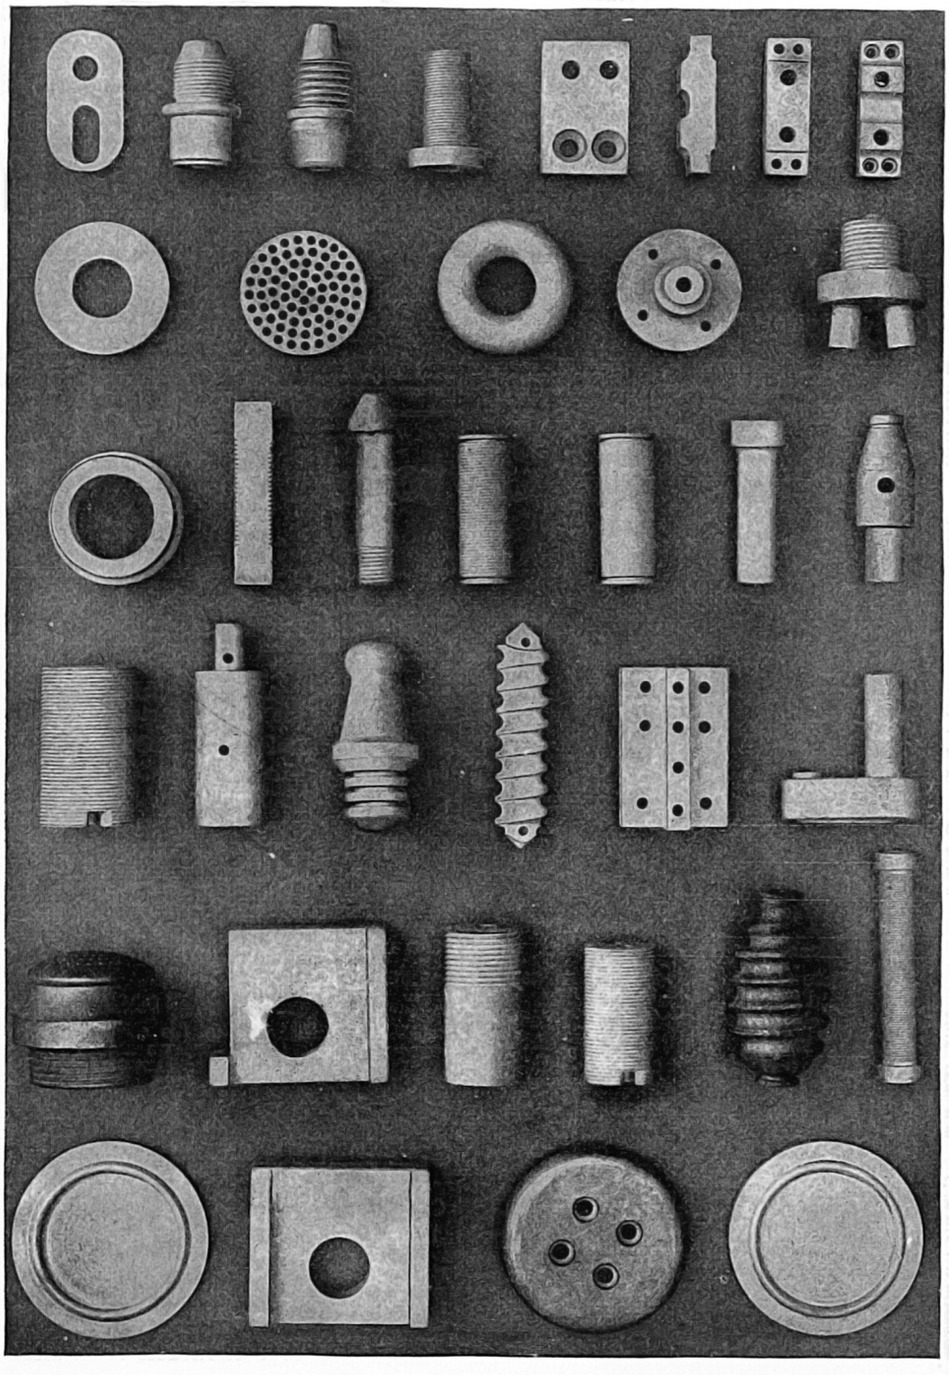

Lava Electrical Insulation

Lava Is

the ideal strong, hard, solid fireproof, non-corrosive Insulation. It is machined green, by sawing, lathe turning, milling, drilling and threading to any desired form. Then kiln hardened at 2000° and is unaffected by any subsequent temperature short of that heat.

It will withstand a far greater heat than the conductor which it protects!

Coefficient of expansion being negligible it is of especial value in instruments requiring a fixed relation of their parts under ALL conditions.

Lava Is Not

Molded—no cost or delays for dies or molds.

Glazed or colored. No stock or standard parts—everything being made specially according to design of customers.

Affected by acids or alkali.

Subject to variations in structure or composition (being a natural product).

Ask for P. J. Kruesi's book on "Lava for Mechanical and Electrical Purposes."

AMERICAN LAVA MFG. CORPORATION

Burners all forms for all gases. Heat resisting parts for gas appliances. Electrical Insulation

CHATTANOOGA, TENN.

began to go across with all these devices installed.

Hearing Subs 25 Miles.

Here are some of the outstanding features of the American submarine sound detector:

Under ideal conditions with extraneous noises reduced to a minimum or entirely eliminated *the device was effective at a range of from fifteen to twenty-five miles.*

Trained operators could clearly and invariably distinguish between the sounds made by approaching surface craft and under-water vessels (submarines).

Under average circumstances, the device was good for a range of between *three and eight miles.*

Within five miles the engine characteristics of different vessels was clearly marked even to the point of *identifying by name* certain (unseen) vessels after they had been observed previously for more than one time. (This test was substantiated by a series of night-time experiments at the entrance to Boston harbor in September and October, 1917.)

It was found practical to tell when a submarine changed from her oil engines to electrical drive, which was necessary every time she submerged.

The direction of sound could usually be computed within a very few degrees of its actual location and a good judgment of the distance could generally be made. This was proved to the satisfaction of all concerned following a number of practical tests off Cape Cod, Mass., in the late summer of 1917, in waters adjacent to Boston and in Long Island Sound.

The addition of these listening devices to submarines added the heretofore lacking *sense of hearing* to all the underwater craft and made them at once a much more effective weapon of offense.

An allied submarine on one occasion chased a German U-boat for four hours, while both craft were submerged, without once losing sound contact with the enemy.

The graphic chart publisht herewith will indicate to the reader the ability of submarine chasers to maintain "sound contact" with the enemy and the efficiency of the direction qualities of the device when used in this manner.

The actual battle engagement which it illustrates occurred one early morning in the English Channel. A small squadron of sub-chasers discovered an enemy craft moving slowly up the channel submerged. Forming for the attack they rushed over the spot where their listeners indicated the U-boat to be, dropt a pattern of depth bombs and then withdrew to take observations.

Feverish activity and the sound of hammers ringing against the ship's side was heard. The submarine engines would then start up and stop, start and stop again.

25 Germans Commit Suicide.

Further attacks were delivered and more noise came to the listeners from the hold of the submarine. Evidently the first depth charge had taken good effect and the enemy's crew was making a last desperate effort to reach the surface. Suddenly there was dead silence—then 25 revolver shots rang out—3 followed by 22. *The crew giving up in despair, had committed suicide.* The loss of this submarine was later substantiated by the British Intelligence Department.

When Capt. Leigh and his party went abroad in November, 1917, he requested the Admiralty to loan him two high-speed chasers in which operations could be begun in English waters, but was finally obliged to accept 3 trawlers of 9 to 10 knots speed, because of the then scarcity of higher speed craft.

Equipping these vessels with all of the anti-submarine detecting apparatus they went out in the English Channel on New Year's Day, 1918. Shortly afterwards a wireless message was picked up from an airship giving the position of a submarine which had just been seen to submerge. The channel had been laid out in numbered squares to facilitate the immediate location of enemy craft and the little squadron steamed over, got their devices out and picked up the submarine course.

When believing themselves about over the enemy, depth bombs were discharged and later a trawling instrument was used, **which indicated that the submarine had been destroyed.** Great quantities of oil rising to the surface also substantiated the success of the attack.

Remaining in English and French waters for several months, where the American devices proved of great value and were highly complimented both by Admiral Sims and British naval officers, another squadron was equipt and sent into the Mediterranean and Adriatic, where at this time submarine activity was at its height.

Because of the deeper water and less interference from surface traffic, listening conditions were unusually good. A "barrage" line of boats was organized across Otranto Straits, between the mainland and the Island of Corfu, to effectively put a stop to the enemy's free entrance to the Mediterranean.

Three of the chasers patrolling in formation abreast one dark night heard a "sub" approaching. The bearings obtained by the two beam vessels pointed directly toward the center boat. The middle boat now heard the submarine approaching from a position dead astern. The enemy came nearer and nearer and finally past right under the sub-chaser so close to the surface that those on board felt a wave of water along the keel of their ship.

When the German had past on and out in front the attack was made in unison, a *pattern** of depth bombs was "let go" and the little fleet halted for further observations. Pretty soon the whirl of the submarine's electric motors was heard—evidently in an effort to reach the surface.

The Germans "Cash In."

Then came a crunching noise not unlike the popping in of a blown-up paper bag. It was apparent that the submarine had been damaged—put out of control—and sunk, and that she had collapsed from the tremendous water pressure at these depths.

Many incidents of this kind occurred during the subsequent operations in foreign waters and several submarines were accounted for thru the direct aid of the American listening devices.

In fact, naval experts who were closely in touch with submarine detection development during the war period state with conviction that if the conflict had continued thru another summer the submarine would literally have been driven from the ocean, the promise of a condition due in a large measure to the perfection of submarine detecting apparatus.

It has also been stated that the noticeable change in naval tactics—from defensive to offensive—which marked this country's entrance into the war was largely caused by the application of American principles to the pursuit and attack of the U-boat, something made possible by the practical use to which it was found the American submarine detector could be put.

* A pattern of depth bombs refers to the plan of dropping them simultaneously in certain prearranged figures, such as squares, circles, etc. The chart herewith shows the pattern scheme quite clearly—notice the black dots at points marked "attack."

Mechanical Engineering

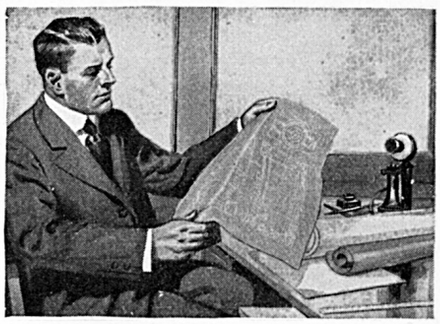

Learn at Home!

THE Government and employers everywhere are looking for men with mechanical ability. Splendid salaries and rapid advancement are offered.

There is an easy, delightful way in which you can learn right at home in spare time. For 27 years the International Correspondence Schools have been giving men and women just the training they need for success in mechanical engineering and more than 200 other subjects. Hundreds of thousands have stepped into good positions through I. C. S. help, but never were opportunities so great as now.

Let the I. C. S. help *you.* Choose the work you like best in the coupon below, then mark and mail it today. This doesn't obligate you in the least and it will bring you information that will start you on a successful career. This is your chance. Don't let it slip by. Mark and mail this coupon *now.*

TEAR OUT HERE

INTERNATIONAL CORRESPONDENCE SCHOOLS
BOX 6191, SCRANTON, PA.

Explain, without obligating me, how I can qualify for the position, or in the subject, before which I mark X.

☐ ELECTRICAL ENGINEER	☐ CHEMICAL ENGINEER
☐ Electrician	☐ SALESMANSHIP
☐ Electric Wiring	☐ ADVERTISING MAN
☐ Electric Lighting	☐ Window Trimmer
☐ Electric Car Running	☐ Show Card Writer
☐ Heavy Electric Traction	☐ Outdoor Sign Painter
☐ Electrical Draftsman	☐ RAILROADER
☐ Electric Machine Designer	☐ ILLUSTRATOR
☐ Telegraph Expert	☐ DESIGNER
☐ Practical Telephony	☐ BOOKKEEPER
☐ MECHANICAL ENGINEER	☐ Stenographer and Typist
☐ Mechanical Draftsman	☐ Cert. Pub. Accountant
☐ Ship Draftsman	☐ Traffic Management
☐ Machine Shop Practice	☐ Commercial Law
☐ Toolmaker	☐ GOOD ENGLISH
☐ Gas Engineer	☐ STATIONARY ENGINEER
☐ CIVIL ENGINEER	☐ CIVIL SERVICE
☐ Surveying and Mapping	☐ Railway Mail Clerk
☐ MINE FOREM'N OR ENG'R	☐ Textile Overseer or Supt.
☐ ARCHITECT	☐ AGRICULTURE
☐ Architectural Draftsman	☐ Navigator ☐ Spanish
☐ PLUMBING AND HEATING	☐ Poultry Raising ☐ French
☐ Sheet Metal Worker	☐ Automobiles ☐ Italian

Name_____

Present Occupation_____

Street and No._____

City_____ State_____

ELECTRICAL training again open to civilians. Over 3000 men trained for electrical industries in experience of more than a quarter of a century. For men of ambition and limited time. Condensed course in Electrical

ENGINEERING enables graduates to secure good positions and promotions. Theoretical and Practical Electricity, Mathematics, Steam and Gas Engines, Mechanical Drawing. Students construct dynamos, install wiring and test **IN ONE YEAR** electrical machinery. Course with diploma, complete.

Thoroughly equipped fireproof dormitories, dining hall, laboratories, shops. Write for catalog. 27th year opens October 1, 1919.

BLISS ELECTRICAL SCHOOL
260 Takoma Avenue, Washington, D. C.

BE A TOP NOTCHER

Get into the 100% Class. Be Properous, Powerful, Happy. Our system has shown thousands HOW. It can show YOU. No guesswork. Proved. A true-to-life Personality Sketch and first lesson on Happier Living for 10c. and birthdate. **THOMSON-HEYWOOD CO., Dept. 350, Chronicle Bldg., San Francisco, Cal.**

AMPLIFY YOUR RADIO SIGNALS

ONE of the greatest drawbacks since the invention of wireless telegraphy is the receiving of weak signals at the receiving station. Many devices were proposed to improve this condition, but without success, on account of the mechanical difficulties encountered in these amplifying devices.

However, this was recently solved by the introduction of an exceedingly sensitive microphone transmitter, which is known to detect sound waves with great accuracy and magnify them through an intermediate telephone circuit.

By the employment of the new DETECTAGRAPH-TRANSMITTER, the amateur can amplify the radio signals to such an intensity that he can hear the signals about his station without the need of the telephone head set.

By the addition of a loud talking telephone he is able to hear the messages many feet away from the instrument. He is also able to demonstrate the operation of his wireless apparatus to his friends.

The super-sensitive DETECTAGRAPH-TRANSMITTER herewith shown is two and three-eighths inches in diameter, five-eighths of an inch thick and weighs less than three ounces. It is the most sensitive sound detecting device ever brought before the public.

The manner in which the amplifying process is attained is by attaching with tape the DETECTAGRAPH - TRANSMITTER to the regular wireless receiver as indicated in the diagram.

SUPER-SENSITIVE **Detectagraph** MICROPHONE DEVICES

Practical Instruments for Commercial and Scientific Purposes.

Our Super-Sensitive Detectagraph Transmitter. Price, $7.00 Complete

Other Uses

Not only is this instrument applicable for amplifying radio signals, but it can be used with equal satisfaction for magnifying other sounds. Phonograph music can be transmitted from one place to another by means of this instrument, and those who are afflicted with deafness will find enormous benefit by using this transmitter.

It is the greatest device for building your own loud talking telephone, detectagraph and other devices. Can be used for any purpose where a sensitive detecting instrument is required.

Model "B" Horn, with Loud Talking Receiver, Cord Plugs and Desk Stand Base Price, $10.00 Complete



Our Special No. 25 Loud Talking Receiver Price, $4.00 Complete

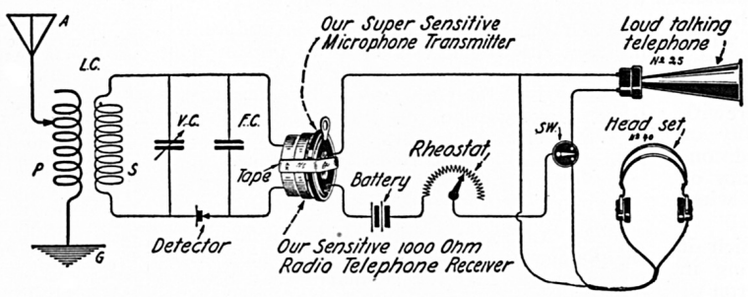

DETECTAGRAPHS

FOR THE EXPERIMENTER FOR DETECTIVES FOR THE DEAF

DETECTAGRAPH JUNIOR DEAF-PHONE

A super-sensitive instrument which has been developed to meet the demands for a practical and efficient hearing device at an extremely low price. Equal to any $35.00 instrument made.

The outfit consists of a Super-Sensitive Transmitter, with a cord connector; Super-Sensitive Ear Piece with small black cord; Black Single Headband; Black Case and two small Batteries. The Transmitter is 2⅜ inches in diameter, ⅝ of an inch thick, and weighs less than three ounces.

$15.00

Complete

OUR NEW, IMPROVED DETECTAGRAPH

The outfit and case weighs less than two pounds and can be carried in the pocket, yet it is combined with certain features of our famous Detector, which makes it the most powerful and in every way, the most Microphone Detective Device the world has ever known.

Conversations carried on in an ordinary tone and even whispers are taken up by the concealed **Detectagraph** transmitter, which collects sounds from all directions and are conveyed over the wire to the listening end. This outfit consists of an Improved Sensitive Transmitter with cord connector; 25 feet Black Cord; Sensitive Receiver; Single Headband; Small Carrying Case and Small Battery. The improved Transmitter is only 2⅜ inches in diameter, ⅝ inch thick, and weighs less than 3 ounces.

$15.00

Complete



Order direct from ad. Or write for free descriptive circular. For your convenience use the coupon.

G. Boissonnault Co., 26 Cortlandt St., N.Y.C.

As per your ad in Electrical Experimenter, please send me free circulars and full particulars about your Detectagraph Devices.

NAME.....

ADDRESS.....

CITY.....

STATE.....

G. BOISSONNAULT COMPANY

26 CORTLANDT STREET NEW YORK CITY

Makers of Super-Sensitive Microphone Devices

Alexanderson's "Barrage" Receiver

(*Continued from page* 135)

ing which has become so familiar, but also the original meaning of toll or stoppage prevention. Thus the barrage receiver may be used not only in time of war to counteract the offensive barrage of an enemy radio station, but it may be used to multiply the number of peaceful communications that may be carried on simultaneously without disturbing each other.

Duplex Radiotelephony.

NEUTRALIZED RECEIVING ANTENNA MOUNTED ON THE SAME MAST AS THE SENDING ANTENNA

If two sets of wires are mounted on the same masts, the radiation from one set to the other is obviously so strong that the overpowering of an ordinary receiving set by the transmitted energy would be almost of the same order of magnitude as if the identical wires were used. The quantitative relations may be better appreciated by mentioning specific figures. In the tests made in Schenectady, the receiving antenna consists of five wires mounted as an umbrella

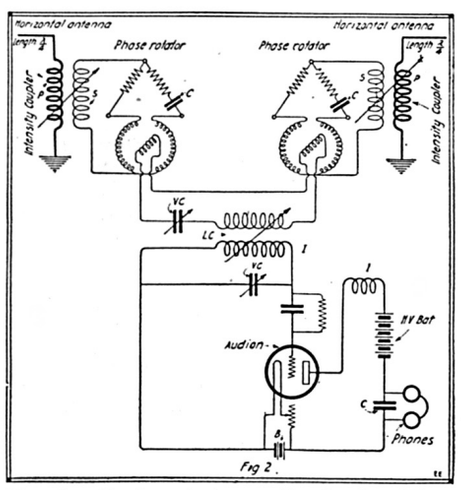

Fig. 2. Duplex Antenna Used with Phase Rotator Units and Regular Receiving Instruments in Alexanderson "Barrage" Receiving Set.

around the main mast, while the sending antenna consists of two wires extending from this mast to another building. The capacity to ground of the sending antenna is 0.003 microfarad, the receiving antenna 0.0011 microfarad, and the mutual capacity such that 10,000 volts on the sending antenna produces 500 volts on the receiving antenna when it is disconnected. While it is obvious that an antenna oscillating with 500 volts continuous waves could not be used with ordinary methods of reception, the system for neutralization which will be described has proven so effective that an ordinary receiving set can be used for receiving signals from such distances as the Pacific coast (2,500 miles or 4,000 km.) without any appreciable interference from continuous wave radiation from the main antenna of 20 amperes and 10,000 volts!

Two methods of neutralization have been used: *inductive* neutralization and *static* (*capacitive*) neutralization. While both methods have been used successfully, the capacitive neutralization is much preferable both on account of accuracy of adjustment and simplicity. A diagram of inductive neutralization is shown at Figure 1. The transformer *T* is used to create a potential of opposite phase to the potential of the sending antenna. The negative potential thus created is transferred to the receiving antenna thru the exposure condenser *E*. The negative potential thus imprest upon the receiving antenna thru the transformer and the exposure condenser is adjusted so as to counterbalance exactly the direct exposure from antenna to antenna, thus leaving the receiving antenna at ground potential. The phase relation of the transformer is, however, not exactly 180°, and a residual potential is left on the receiving antenna which is sufficient in most cases to interfere with reception unless further precautions are taken. If, however, a frequency trap *F* is introduced the neutralization becomes good enough so that an ordinary receiving set can be used.

The arrangement shown in Figure 1 was used to demonstrate duplex radio telephone conversation between Pittsfield and Schenectady (50 miles or 80 km.)

The "Barrage" Radio Receiver.

The barrage receiver is fundamentally a *uni-directional receiver*. The principle of uni-directional reception was first developed by Bellini and Tosi. While the uni-directional Bellini-Tosi receiver has been used as a direction finder, it has, to the knowledge of the author, not been used to any extent for reception of long distance signals. The Bellini-Tosi receiver is based on the principle of receiving the signal thru two antennas of different characteristics and neutralizes the signals received from one direction by a system of balancing.

The uni-directional Bellini-Tosi receiver works on the principle that the *electromagnetic* and *electrostatic* exposures are 90° out of phase. The *barrage receiver* takes advantage of the geographic phase *displacement* in the wave as it travels over the surface of the earth. In the first barrage receivers which have been installed the antennas consist of two insulated wires laid on the ground a distance of two miles (3.2 km.) in each direction from the receiving station. It was originally intended by the author to mount the wires on poles, but the easier procedure of laying the wires on the ground was adopted at the suggestion of Lieutenant-Commander A. Hoyt Taylor, and the arrangement has proven entirely satisfactory. The barrage receiving set, photograph of which is shown herewith, consists of a standard receiving set, combined with a *phase rotator* set. When used as a barrage receiver, a condenser is used in place of the antenna and the standard receiving set is coupled to the aperiodic antenna by the phase rotator set. The diagram of the phase rotator set is shown at Fig. 2. Each antenna is connected to ground thru an intensity coupler, the secondaries of the intensity couplers are connected to the primary of the phase rotators. Each phase rotator is built on the principle of a split phase induction motor or induction regulator. A single phase current introduced in the primary is split into a quarter-phase current which produces the equivalent of a rotating magnetic field inductively related to the secondary. By adjusting the position of the secondary coil the electromotive force induced in it may be made to assume any desired phase relation to the primary voltage. The receiving set proper when used with the barrage receiver has all the normal characteristics of a standard receiving set. A signal originating in any direction whatever may be neutralized by adjustment of the intensity couplers and phase rotators. This adjustment is very easy to perform, even by an inexperienced operator, and is perfectly stable after it has been made.

An experimental barrage receiving set was operated for several months of the

MURDOCK
No. 55

2000 Ohm Double Set $4.00

3000 Ohm Double Set $5.00

Q R K

is the invariable answer of the fellow with "FIFTY-FIVE" fones:—the most sensitive, dependable, and serviceable radio receivers obtainable anywhere at such remarkably low prices. A trial will prove their worth. ORDER A SET TODAY. Use these "fones" for fourteen days. If they are not as good as you want, send them back and get your money. A cheaper set is not worth the bother. A more expensive set is really unnecessary.

Write for your copy of Bulletin 19

WM. J. MURDOCK CO.
55 Carter St.
Chelsea, Mass.

Pacific Coast Representatives:
The Keeler White Co.
221 Second St., San Francisco, Calif.



"The Leader of Them All"
Thordarson's Flexible Wireless Transformer
Thordarson Electric Mfg. Co.
Chicago Ill.



MORSE TELEGRAPH SET
Just as the cut shows it. Fine for learning telegraphy or for a private line. With code and full instructions.....80c

WIRELESS PRACTICE SET
The first need of every wireless amateur. High pitch buzzer and key for learning wireless code. Also for test buzzer, $1.00

BLINKER PRACTICE SET
For learning the visual code.....90c
Any two of above sets may be used for a short line between nearby houses, etc. Send postage for 1 lb. Ask for catalog E.
THE WILCOX LABORATORIES, Lansing, Mich.

WIRELESS BY MAIL
in America's Largest Radio School

NEW plan of profit sharing by which every student taking course is *guaranteed* saving of ten per cent of cost of tuition and an estimated saving of 50 per cent or more.

Positions pay $110 per month and living expenses up to $3500 per year.

Qualify in 16 weeks or less. Large staff government licensed instructors, first grade and extra first grade. Wireless practice set and text books free. Full commercial wireless course with free post graduate course of one month in our Washington school to successful students. Very easy terms. Write today for handsomely illustrated catalogue and particulars of profit sharing plan.

SERVICE RADIO SCHOOL
Dept E., 902 Pa. Ave. Washington, D. C.

Free advice to amateurs regarding construction of apparatus on receipt of 3 cents postage, addressed to our Construction and Equipment Department.

HUDSON RIVER NIGHT LINES
NEW YORK ALBANY TROY

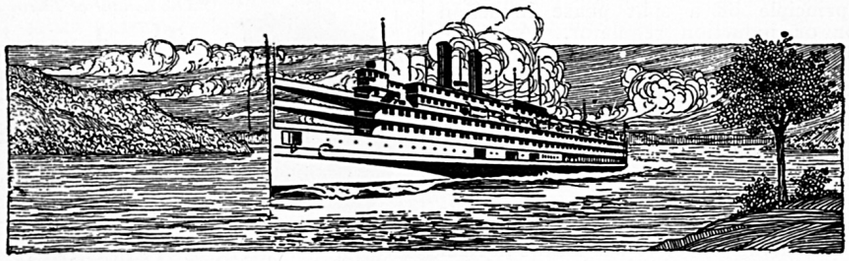

The Luxurious Route to Vacation Land

Leave Pier 32 N. R. Foot Canal St., daily 6 P. M., West 132nd St., 6:30 P. M. Due Albany 6 o'clock following morning. Direct rail connections to all points north, east and west.

Largest River Steamers in the World
Express Freight Service Automobiles Carried
HUDSON NAVIGATION COMPANY

summer and fall of 1918, about three miles from the New Brunswick, N. J., radio station. Records were kept on the reception of European stations during the operation of the New Brunswick station. As the New Brunswick wave is 13,600 meters and the Carnarvon, Wales, wave is 14,200 meters, the reception of Carnarvon was the hardest test to which the set could be put. It was found that in spite of the overwhelming intensity of the New Brunswick signals on an unbalanced receiver, the barrage receiver could be adjusted so that the transmitted wave not only did not interfere with the Carnarvon signals, but the New Brunswick signals could be made entirely inaudible. During these tests it was found that the directive characteristics of the barrage receiver was a material help in reduction of interference by static and strays, as it was found very frequently that solid copy could be obtained by proper directive adjustment, while the signals were practically unreadable with ordinary methods.

The improvement of reception of signals by the use of the barrage receiver depends upon the highly directive qualities of this receiving system. For comparison with other methods of directive reception, a tabulation of directiveness is given in Fig. 3. In this comparison the symmetrical elevated antenna which receives equally from all directions is designated at 100 per cent. The percentages of directivity are calculated from the areas of the corresponding horizontal plane intensity diagrams here shown. If the directivity represented by the intensity diagrams can be taken as relative measure of the average stray-to-signal ratio, we find that the magnetic loop should have 50 per cent. as much strays as the elevated antenna, the differential horizontal antenna (Sayville, Long Island), probably about the same as the magnetic loop, and the barrage receiver 22 per cent. Statistics of reception indicate that these figures are reasonably in agreement with facts, when the strays are evenly distributed. When the strays are directive the improvement is much greater.

A rather surprising characteristic was discovered by the use of the barrage receiver. It was expected that this receiver could be used to neutralize signals from all directions except the direction close to the signal to be received. As a matter of fact it was found that interference could be neutralized by originating in the same direction as the signal. This was first discovered in the New Brunswick installation. Signals from San Diego, Cal., right in line with the transmitting station, could be received without great reduction in intensity, while the set was adjusted so as to neutralize the transmitting station. The explanation for this is the fact that in the case of the nearby station the wave front is curved and the radiation diverging, whereas in the case of the far-away station the radiation is parallel. The receiving antenna covers a space of four miles (6.4 km.), and in this space there is sufficient divergence of the radiation from the nearby station so that an adjustment can be made whereby the diverging and parallel radiation have different effect upon the receiving set. The phenomenon is comparable to the focusing of a field glass on nearby and distant objects. In this case we have a radio field glass of four miles (6.4 km.) in diameter; and, for such dimensions, the focusing effect is sufficient, even at considerable distances, to produce an effective discrimination.

While the barrage receiver was worked out primarily to avoid interference in transoceanic communication, it may be found useful also for the purposes for which the bridge receiver was developed—that is, simultaneous sending and receiving from small shore stations or ship stations. In such cases it has the advantage over the bridge receiver that it can be used not only to neutralize the transmitting station to which it belongs, but can neutralize interference from any other ship or shore station.

My Inventions

By Nikola Tesla

(*Continued from page* 148)

showered upon me, and journeyed to my home where I passed through a most painful ordeal and illness. Upon regaining my health I began to formulate plans for the resumption of work in America. Up to that time I never realized that I possessed any particular gift of discovery but Lord Rayleigh, whom I always considered as an ideal man of science, had said so and if that was the case I felt that I should concentrate on some big idea.

Nature's Trigger.

One day, as I was roaming in the mountains, I sought shelter from an approaching storm. The sky became overhung with heavy clouds but somehow the rain was delayed until, all of a sudden, there was a lightning flash and a few moments after a deluge. This observation set me thinking. It was manifest that the two phenomena were closely related, as cause and effect, and a little reflection led me to the conclusion that the electrical energy involved in the precipitation of the water was inconsiderable, the function of lightning being much like that of a sensitive trigger. Here was a stupendous possibility of achievement. If we could produce electric effects of the required quality, this whole planet and the conditions of existence on it could be transformed. The sun raises the water of the oceans and winds drive it to distant regions where it remains in a state of most delicate balance. If it were in our power to upset it when and wherever desired, this mighty life-sustaining stream could be at will controlled. We could irrigate arid deserts, create lakes and rivers and provide motive power in unlimited amounts. This would be the most efficient way of harnessing the sun to the uses of man. The consummation depended on our ability to develop electric forces of the order of those in nature. It seemed a hopeless undertaking, but I made up my mind to try it and immediately on my return to the United States, in the summer of 1892, work was begun which was to me all the more attractive, because a means of the same kind was necessary for the successful transmission of energy without wires.

Four Million Volts.

The first gratifying result was obtained in the spring of the succeeding year when I reached tensions of about 1,000,000 volts with my conical coil. That was not much in the light of the present art, but it was then considered a feat. Steady progress was made until the destruction of my laboratory by fire in 1895, as may be judged from an article by T. C. Martin which appeared in the April number of the *Century Magazine*. This calamity set me back in many ways and most of that year had to be devoted to planning and reconstruction. However, as soon as circumstances permitted, I returned to the task. Although I knew that higher electro-motive forces were attainable with apparatus of larger dimensions, I had an instinctive perception that the object could be accomplished by the proper design of a comparatively small and compact transformer. In carrying on tests with a *secondary in the form of a flat spiral*, as illustrated in my patents, the absence of streamers surprised me, and it was not long before I discovered that this was due to the position of the turns and their mutual action. Profiting from this observation I resorted to the use of a high tension conductor with turns of considerable diameter sufficiently separated to keep down the distributed capacity, while at the

(*Continued on page* 176)

Brandes "Superior" Head Set, complete with head band, $6. A professional set within the means of every amateur. 2000 ohms.

Uncle Sam Said:

"Go ahead with amateur wireless receiving stations." You will be prepared to get the messages the other fellow misses if you have one of

BRANDES Wireless Headsets

They enable you to "hear with both ears" because Brandes diaphragms are perfectly matched for tone, and both receivers are perfectly tuned together. Handsome, well made, fine quality.

Send for Your Set Today

Your money back if Brandes Headsets don't prove *better* than any you've used in clearness, sensitiveness and range.

Booklet "E" will be sent upon receipt of 4c *in stamps.*

C. BRANDES, INC.

Wireless Receiver Specialists

ROOM 814 32 UNION SQUARE NEW YORK CITY

Complete line of Brandes receivers for those in Western States and Pacific Coast. Catalogue "E" on request.

Balboa Building **FORD KING** **San Francisco, Cal.**

Universal Radio Apparatus

The Universal Radio Manufacturing Corporation has taken over the business previously conducted by the Mignon Wireless Corporation and is prepared to furnish all of the Mignon system instruments, built according to the original Mignon specifications. In addition to these, the Corporation has recently perfected a series of new type instruments which for efficient work and real service have never been equalled.

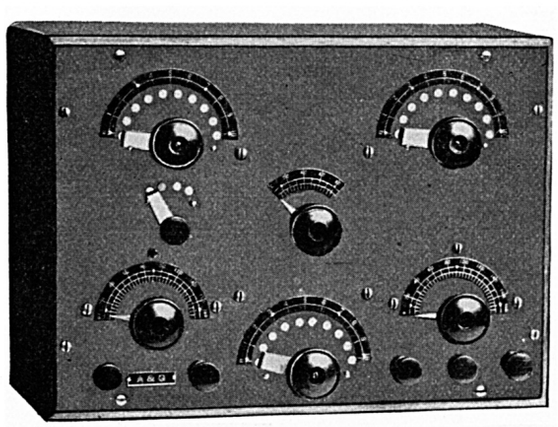

Regerative Receiver, 200-2500 meters

The Universal complete line of High Quality Radio Apparatus now includes

Cabinet Receiving Sets
Transmission Sets
Loose Couplers
Undamped Wave Receivers
Time Signal Sets
Detectors, etc.

These **"Universal"** instruments embody the very latest advances in the art of radio communication and are far in advance of other instruments of this type. Every detail in their design has been carefully worked out, and the circuit constants have been computed with scientific accuracy to give maximum results when properly used. Materials and workmanship are of the highest quality.

Every piece of **"Universal"** apparatus must pass a series of rigid tests before being allowed to leave the factory, and we unconditionally guarantee every piece of **"Universal"** apparatus to be exactly as represented, and **will cheerfully refund the purchase price** if the instrument fails to make good for any reason.

Write To-day for Free Catalog

UNIVERSAL RADIO MFG. CORPORATION

SUCCESSOR TO MIGNON WIRELESS CORPORATION

ELMIRA, NEW YORK

De Forest's New Catalog

illustrating and describing the very latest and best in

RADIO APPARATUS

For Discriminating Users

is ready for mailing. Complete information regarding the De Forest "Unit" Set, "Honey Comb" Coils (a radical departure from previous forms of apparatus), variable air and fixed condensers, wavemeters, variometers, detectors, etc., will be sent upon receipt of 10c to defray postage.

De Forest Radio Tel. & Tel. Co.
1391 Sedgwick Ave. New York City

WANTED
Immediately

WIRELESS operators are in demand owing to the expansion of our Merchant Marine. Pay has increased to $110 per month plus all expenses.

THE Y. M. C. A. Radio Schools give thorough practical courses with individual instruction. Our graduates fill responsible positions.

THIS is *your* opportunity. Classes now forming. Excellent dormitory facilities. Complete laboratory equipment. Write today for illustrated booklet.

Y. M. C. A.
NEW YORK CITY

Manhattan Branch: 154 East 86th St. Tel. Lenox 6051
Brooklyn Branch: Marcy Ave. Near B'way Tel. W'msburg 3800



COUNTY AGENTS WANTED
for our line of
Electric Farm Lighting Plants

Good money-making proposition, liberal commission. $300 required. Write for terms.
We also sell **Garage Equipment, Storage Batteries, Battery Charging Generators, Motors, Tungar Rectifiers,** etc. Catalog free.
Watson Electric Co. Dept. 16, 122 Michigan Av. Chicago

Amateur Radio Restored

(*Continued from page* 131)

plaything only or just a mere hobby.

The ELECTRICAL EXPERIMENTER thru the RADIO LEAGUE OF AMERICA shall be only too glad to publish letters from amateurs suggesting new ways and means to benefit the cause of Radio Amateurism, our columns being open to all worthy suggestions.

While for the present there is nothing to be feared of adverse legislation, still it is impossible to forecast that such legislation will not be attempted in the future. We have won the freedom of the ether due to the splendid coöperation of Radio Amateurs in this country, and if we have won once we will win again.

The RADIO LEAGUE OF AMERICA is a clearing house for all Radio Amateurs in the United States, and today has more members than any other league, but it has not enough members. It wishes to have every amateur as an enrolled member. The membership of the Radio League, established in 1915, is gratuitous. There are no dues or fees to be paid. All the League wants is the name of every amateur and his address, so that first of all, if a national emergency arises, the Government can rely on the amateurs for quick communication. Also in case adverse legislation should be attempted, the League wishes to notify every member immediately, as it did last December when the freedom of the ether was threatened.

We ask every amateur who is not a member of the League to sign the blank appended herewith. It costs nothing but a 3-cent stamp to do so. Every enrolled amateur is entitled to the membership certificate free of charge which is mailed to all members. The membership of the Radio League of America now comprises 21,309 members. If you are not a member at the present time, you should enroll at once by all means.

LONG LIVE THE RADIO AMATEUR!

Application for Membership in the Radio League of America

I, THE UNDERSIGNED, a Radio Amateur, am the owner of a Wireless Station. My station has been in use since.....,
and I herewith desire to apply for membership in the RADIO LEAGUE OF AMERICA. I understand that the Radio League of America is a National Scientific Organization for the pursuit of the Radio Arts. I will not be called upon to pay membership fees, or dues, and once enrolled I am to share in all the privileges of a regular member.

Upon receipt of this form properly filled out you are to send me your eight-page booklet describing the purpose of the League, rules, etc.

Name.....

City.....

State.....

Date.....191

Mail this blank to Radio League of America, 231 Fulton St., New York City.
6-19

A NEW TYPE OF TRANSFORMER.

(*Continued from page* 139)

(Nos. 20 to 30 gage), and is twelve inches long. The exact diameter cannot be given, but it must be slightly smaller than the inside diameter of the secondaries, usually from one to one and one-half inches.

The primary can consist of three pounds No. 16 D. C. C., which when connected in series with an adjustable reactance or rheostat, will give a power range of approximately two to six amperes.

The core is wound with two or three layers of Empire cloth, and then the primary wire is wound on. Between the primary and each secondary should be placed a hard rubber disc about an inch wider than the secondaries, and then the secondaries, covered with Empire cloth, are slipt in place. If a hard rubber disc is not available, three or four layers of the Empire cloth may be used. Great care must be taken with the insulation on account of the peculiar construction, and it is especially necessary that the insulation along the core, between primary and secondaries, be well taken care of. Connections for the secondaries are shown in the diagram (2).

When properly constructed, a thick spark, the length depending on the secondaries used, will be obtained. The transformer has proved especially good in use with a rotary gap.

A transformer constructed along similar lines, using two secondaries from a three-inch spark coil, has been giving me excellent service, and I hope other amateurs will have a similar experience.

Contributed by WM. HOLLADAY.

GERMANS' WIRELESS CODE

Dr. J. A. Fleming, in a lecture on "Electric Wave Telegraphy" at the British Royal Institution, revealed the fact that the Germans had, during the war, conveyed much important information from Tuckerton radio station in America by a code which was dependent on a certain method of "spacing," being otherwise harmless.

"I Would Not Part with it for $10,000"

So writes an enthusiastic, grateful customer. In like manner testify over 100,000 people who have worn it. Conserve your body and life *first.*

The Natural Body Brace

Overcomes **WEAKNESS** and **ORGANIC AILMENTS** of **WOMEN AND MEN.** Develops erect, graceful figure.

Brings restful relief, comfort, ability to do things, health and strength.

For Children Also

Wear It 30 Days Free at Our Expense

Does away with the strain and pain of standing and walking; replaces and supports misplaced internal organs; reduces enlarged abdomen; straightens and strengthens the back; corrects stooping shoulders; develops lungs, chest and bust; relieves backache, curvatures, nervousness, ruptures, constipation. Comfortable and easy to wear.

Keep Yourself Fit

Write today for illustrated booklet, measurement blank, etc., and read our very liberal proposition.

HOWARD C. RASH, Pres. Natural Body Brace Co.
286 Rash Building SALINA, KANSAS

Learn WIRELESS —NOW—

Enter This New Field of Greatest Opportunity

NOW that peace is here wireless offers the greatest opportunity of the day to the young men of America. The experimental stage has passed. Wireless now equals in importance telegraphy and telephony, and if the present commercial wireless program is carried out, it may supplant them by the end of 1919. It has earned its place among the great commercial industries of the earth. So great has been the development and growth of Wireless in recent years that there is now a tremendous shortage of operators.

Peace Increases Demand For Wireless Operators

Actually thousands upon thousands of Wireless Operators, Inspectors, Mechanics, Electricians, and Radio Draftsmen will be needed for permanent "peace time" wireless positions at bigger salaries than have ever before been paid.

Peace means a bigger demand for men in every branch of wireless and is opening up new fields of Commercial Wireless activity which will fairly revolutionize present methods of communication.

No Previous Experience Necessary

You Can Learn Wireless In Ten Weeks In Your Own Home, through our practical home study wireless course. No previous experience or training is necessary in order to become a Successful Wireless Expert With our help you can quickly qualify for a good position at big pay. Many of our students have secured positions before completing the course. You will make rapid progress from the start because our course is based on actual practice and teaches you what you will need to know to make a big success of Wireless work.

Get Your Instructions From the Nation's Capital

(Our Course is endorsed by U. S. Government Officials.)

The National Radio Institute headed by authorities who have been closely allied with government training of students, was established in 1914 and is the first school in America to successfully teach Wireless by Mail. The work is under the direction of J. E. Smith, E. E., director of the Radio Department, Howard University, and E. R. Haas, formerly of the Radio Division of Yale University.

We now have students throughout the world. Our location in the Nation's Capital together with the standing of our officers and their wide acquaintance among government officials, connected with Wireless activities, place us in position to give our students the best instruction obtainable and to be of the utmost help in assisting them to secure good paying positions.

Travel and See the World

If you want to travel and see the world—go to foreign countries, and increase your knowledge of world affairs, Wireless offers you the chance of a lifetime. However, you are not obliged to travel, but may secure a permanent position at one of the big Land Stations, Railroad, Telegraph, or Steamship companies, if preferred.

Pay as You Go Along With Your Lessons

Our plans of payment bring a wireless education within the reach of anyone who desires to learn. A small payment down on our convenient payment plan, and small following payments, enables you to earn the cost of your tuition while actually learning to be a wireless operator.

Earn up to $250.00 per Month

In the short period of ten weeks we can make of you a wireless operator, a man with a profession, independent, and not subject to the rise and fall of wages in the labor market. Salaries are as high as $250.00 per month. We give you this training at home, by mail, in your spare time. It is not necessary for you to lose any time from your work to take the course. Then when you have received your diploma from us, we help you find a good position.

FREE INSTRUMENTS TO EVERY STUDENT

In addition to text books, lessons and personal instruction, we send you, while taking our course, a Home Practice Set consisting of a standard sending key and buzzer, and a Universal automatic wireless transmitting and receiving set. These instruments are free to every student. No other school can offer you what we do.

Announcement - - Opening of Norfolk School

The demand for our Course has grown to such an extent that we are now preparing to open a school in Norfolk, Va., which will be under the management of Mr. A. H. Van Nostand, Radio Inspector of the Third Radio District.

FREE Our booklet, "WIRELESS, the Opportunity of Today", gives you complete information in regard to our course, the quick and easy methods by which you can master wireless and other important facts you should know. It is free. Just mail the coupon. No obligation whatever on your part.

—MAIL THIS COUPON TODAY—

NATIONAL RADIO INSTITUTE
Department 74, Washington, D. C.

Send me, free of charge, your booklet, "Wireless, the Opportunity of Today," with full particulars regarding your famous 10 weeks Home Study Course, and your Special Free Instrument Offer.

Name .....

Address .....

Town .....

Wireless Receiving Ban Raised

MESCO WIRELESS PRACTICE SET



The Practice Set comprises a regular telegraph key, without circuit breaker, a special high pitch buzzer, one cell Red Seal Dry Battery, and four feet of green silk covered flexible cord.

The key and buzzer are mounted on a highly finished wood base, and three nickel plated binding posts are so connected that the set may be used for five different purposes.

List No. Price

342 Telegraph Practice Set, with Battery and Cord $3.24

Weighs 4 lbs. packed.
Price does not include postage.

MESCO

Combination Practice Set for Learning the Morse and Continental Visual and Aubible Codes

This outfit is the only reliable instrument which will enable students to become proficient operators in the U. S. Naval Service, because it is equipped with a buzzer and miniature lamp enabling the user to master both the visual and audible signals quickly.

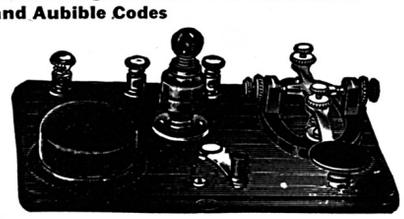

List No. 52—Practice Set with Red Seal Battery and Cord $4.05

Weighs 4 lbs. packed. Price does not include postage.

MESCO RADIO BUZZER



This buzzer maintains a constant note and is recommended as an exciter for checking wavemeters where pure note and ample energy are required.

It consists of practically a closed circuit field of low reluctance, having a steel armature to which is riveted a strap supporting a movable contact. The armature tension is adjustable by means of a screw with a milled head large enough to be easily and permanently adjusted with the fingers. The stationary contact is adjusted by means of a similar screw. The magnet coils are connected in series with a total D. C. resistance of 3.9 ohms. Shunted across these coils is a resistance having a D. C. value of 3 ohms. This shunt eliminates all sparking such as occurs at the break on ordinary radio buzzers and the energy aved thereby is transferred into any oscillating circuit connected to it, the result being that this buzzer as constructed radiates five times more energy than any other existing type. All connecting wires liable to be broken are eliminated. Contacts are of genuine platinum, which is essential in order to maintain a constant note. The parts are mounted on a Condensate base to insure constancy in operation.

Diameter 2 in., height 1¼ in. The cap is attached to the base by a bayonet joint.

List No. Price

55 Mesco Radio Buzzer $2.05

We carry a Large and Complete Line of Standard Wireless Material Recognized by Experts as such with Competent Experienced Wireless Attendants in Charge

Send for the New Edition of Our Catalog W28

It is pocket size, contains 264 pages, with over 1,000 illustrations, and describes in plain, clear language all about Bells, Push Buttons, Batteries, Telephone and Wireless Telegraph Material, Electric Toys, Burglar and Fire Alarm Contrivances, Electric Call Bells, Electric Alarm Clocks, Medical Batteries, Motor Boat Horns, Electrically Heated Apparatus, Battery Connectors, Switches, Battery Gauges, Wireless Telegraph Instruments, Ignition Supplies, etc.

Manhattan Electrical Supply Co., Inc.

NEW YORK: 17 Park Place

CHICAGO: 114 S. Wells St.

ST. LOUIS: 1106 Pine St.

San Francisco Office: 604 Mission St.

A New Bulletin of Experimental Radio Apparatus

That embodies the most modern principles of radio engineering and design, backed by the reliability of twelve years experience in the manufacture of Radio Instruments, will be mailed upon request.

CLAPP-EASTHAN COMPANY

143 Main Street **Cambridge, Mass.**

My Inventions

By Nikola Tesla

(*Continued from page* 173)

same time preventing undue accumulation of the charge at any point. The application of this principle enabled me to produce pressures of 4,000,000 volts, which was about the limit obtainable in my new laboratory at Houston Street, as the discharges extended through a distance of 16 feet. A photograph of this transmitter was published in the *Electrical Review* of November, 1898. In order to advance further along this line I had to go into the open, and in the spring of 1899, having completed preparations for the erection of a wireless plant, I went to Colorado where I remained for more than one year. Here I introduced other improvements and refinements which made it possible to generate currents of any tension that may be desired. Those who are interested will find some information in regard to the experiments I conducted there in my article, "The Problem of Increasing Human Energy" in the *Century Magazine* of June, 1900, to which I have referred on a previous occasion.

The Magnifying Transmitter.

I have been asked by the ELECTRICAL EXPERIMENTER to be quite explicit on this subject so that my young friends among the readers of the magazine will clearly understand the construction and operation of my "Magnifying Transmitter" and the purposes for which it is intended. Well, then, in the first place, it is a *resonant transformer* with a secondary in which the parts, charged to a high potential, are of considerable area and arranged in space along ideal enveloping surfaces of very large radii of curvature, and at proper distances from one another thereby insuring a *small electric surface density everywhere* so that *no leak can occur even if the conductor is bare.* It is suitable for any frequency, from a few to many thousands of cycles per second, and can be used in the production of currents of tremendous volume and moderate pressure, or of smaller amperage and immense electro-motive force. The maximum electric *tension is merely dependent on the curvature of the surfaces* on which the charged elements are situated and the area of the latter.

100 Million Volts Possible.

Judging from my past experience, as much as 100,000,000 volts are perfectly practicable. On the other hand currents of many thousands of amperes may be obtained in the antenna. A plant of but very moderate dimensions is required for such performances. Theoretically, a terminal of less than 90 feet in diameter is sufficient to develop an electro-motive force of that magnitude while for antenna currents of from 2,000-4,000 amperes at the usual frequencies it need not be larger than 30 feet in diameter.

In a more restricted meaning this wireless transmitter is one in which the Hertz-wave radiation is an entirely negligible quantity as compared with the whole energy, under which condition the damping factor is extremely small and an enormous charge is stored in the elevated capacity. Such a circuit may then be excited with impulses of any kind, even of low frequency and it will yield sinusoidal and continuous oscillations like those of an alternator.

Taken in the narrowest significance of the term, however, it is a resonant transformer which, besides possessing these qualities, is accurately proportioned to fit the globe and its electrical constants and properties, by virtue of which design it becomes highly efficient and effective in the

wireless transmission of energy. Distance is then absolutely eliminated, there being *no diminution in the intensity of the transmitted impulses.* It is even possible to make the actions *increase with the distance from the plant* according to an exact mathematical law.

This invention was one of a number comprised in my "World-System" of wireless transmission which I undertook to commercialize on my return to New York in 1900. As to the immediate purposes of my enterprise, they were clearly outlined in a technical statement of that period from which I quote:

"The 'World-System' has resulted from a combination of several original discoveries made by the inventor in the course of long continued research and experimentation. It makes possible not only the instantaneous and precise wireless transmission of any kind of signals, messages or characters, to all parts of the world, but also the inter-connection of the existing telegraph, telephone, and other signal stations without any change in their present equipment. By its means, for instance, a telephone subscriber here may call up and talk to any other subscriber on the Globe. An inexpensive receiver, not bigger than a watch, will enable him to listen anywhere, on land or sea, to a speech delivered or music played in some other place, however distant. These examples are cited merely to give an idea of the possibilities of this great scientific advance, which annihilates distance and makes that perfect natural conductor, the Earth, available for all the innumerable purposes which human ingenuity has found for a line-wire. One far-reaching result of this is that any device capable of being operated thru one or more wires (at a distance obviously restricted) can likewise be actuated, without artificial conductors and with the same facility and accuracy, at distances to which there are no limits other than those imposed by the physical dimensions of the Globe. Thus, not only will entirely new fields for commercial exploitation be opened up by this ideal method of transmission but the old ones vastly extended.

"The 'World-System' is based on the application of the following important inventions and discoveries:

"1. *The 'Tesla Transformer.'* This apparatus is in the production of electrical vibrations as revolutionary as gunpowder was in warfare. Currents many times stronger than any ever generated in the usual ways, and sparks over one hundred feet long, have been produced by the inventor with an instrument of this kind.

"2. *The 'Magnifying Transmitter.'* This is Tesla's best invention—a peculiar transformer specially adapted to excite the Earth, which is in the transmission of electrical energy what the telescope is in astronomical observation. By the use of this marvelous device he has already set up electrical movements of greater intensity than those of lightning and passed a current, sufficient to light more than two hundred incandescent lamps, around the Globe.

"3. *The 'Tesla Wireless System.'* This system comprises a number of improvements and is the only means known for transmitting economically electrical energy to a distance without wires. Careful tests and measurements in connection with an experimental station of great activity, erected by the inventor in Colorado, have demonstrated that power in any desired amount can be conveyed, clear across the Globe if necessary, with a loss not exceeding a few per cent.

"4. *The 'Art of Individualization.'* This invention of Tesla is to primitive 'tuning' what refined language is to unarticulated expression. It makes possible the transmission of signals or messages absolutely secret and exclusive both in the active and passive aspect, that is, non-interfering as well as non-interferable. Each signal is like an individual of unmistakable identity and there is virtually no limit to the number of stations or instruments which can be simultaneously operated without the slightest mutual disturbance.

"5. *The terrestial Stationary Waves."* This wonderful discovery, popularly explained, means that the Earth is responsive to electrical vibrations of definite pitch just as a tuning fork to certain waves of sound. These particular electrical vibrations, capable of powerfully exciting the Globe, lend themselves to innumerable uses of great importance commercially and in many other respects.

"The first 'World-System' power plant can be put in operation in nine months. With this power plant it will be practicable to attain electrical activities up to ten million horsepower and it is designed to serve for as many technical achievements as are possible without due expense. Among these the following may be mentioned:

"(1) The inter-connection of the existing telegraph exchanges or offices all over the world;

"(2) The establishment of a secret and non-interferable government telegraph service;

"(3) The inter-connection of all the present telephone exchanges or offices on the Globe;

"(4) The universal distribution of general news, by telegraph or telephone, in connection with the Press;

"(5) The establishment of such a 'World-System' of intelligence transmission for exclusive private use;

"(6) The inter-connection and operation of all stock tickers of the world;

$15,000.00 COMPLETE WIRELESS OUTFIT For Sale

General Description

15 KVA Motor Generator set. Motor is 440 volt, 120 cycle, 4000 R P M type, built to stand heavy overloads for indefinite lengths of time. Generator same specifications. Set is No. 3 phase, complete with all controls, starters, meters, etc.

Three transformers, Discharger of Rotary Type, condenser, etc.

Induction transformer of sufficient size to be used on any wave length up to 2000 meters with a 650 foot antennae.

Capacity of apparatus without extending:—

800 miles at day.
2800 miles at night.

Installed at a cost of over $15,000.00

The equipment comprising this outfit was the very highest type that could be bought; it is complete—ready to erect and operate without the purchase of other apparatus. Was in daily use when ordered sealed for the duration of the war. The outfit has been completely overhauled and is guaranteed to be in first class operating condition.

For further information, price, etc., address

Box 100, care of Electrical Experimenter

YOU can BUILD this PHONOGRAPH easily!

TREMENDOUS SAVING IN COST

You don't need to be a cabinet maker. We have made it an easy and a pleasant job with

Our Simplified Plans We furnish blue prints, diagrams, motor, and all metal parts complete. You build the cabinet and assemble. A few hours' work, and you will have as fine a type of phonograph as any produced, and at a price away below what you would pay in a store.

Keep the Savings in Your Pocket

Your machine will play all records, will have a wonderful tonal quality, excelled by none. No need now for any family to be without a phonograph because of the cost. THE MAKAFONE solves the problem. BUILD IT YOURSELF AT LESS THAN ONE-FOURTH REGULAR COST, but equal to the high priced cabinet machines. Free Records with each outfit. SEND TODAY FOR FREE CATALOG and full particulars of our wonderful offer. *Many a manufacturer got his start in this way. Why not you? Build machines and sell to your friends. Ask us about this.*

AGENTS ATTENTION

You can make and sell this machine from our plans at a profit of $50 to $75 each. Others are selling two and three a week. Here is your opportunity to make big money and become independent. Pleasant and profitable work. START TODAY.

MODERN PHONOGRAPH SUPPLY CO.
104 Springer Bldg., 313 So. Clinton St., Chicago, Ill.

WRITE TODAY!

MODERN PHONOGRAPH SUPPLY CO.
104 Springer Bldg., 313 So. Clinton St., Chicago, Ill.

Gentlemen: Please send me full particulars of your Makafone proposition, without obligation to me.

Name .....

Street Address .....

City or Town .....

Boys! You Can Make Your Own Electrical Apparatus with the aid of these wonderful books

Home-made Electrical Apparatus

By A. M. Powell

Three wonderful big books, chuck full of just the sort of information you have been looking for and at a price within reach of your pocket book. Each volume is printed on heavy paper, contains **75 pages and over 60 illustrations, complete working drawings for making every sort of electrical apparatus.** Written so you can understand them. **The price is only 25 cents per copy**—practically the cost of publication. See partial table of contents below and order now. The supply is limited.

Vol. I Contains *working drawings* and directions for making all sorts of Static Machines, Static Apparatus, Home-made Batteries, Storage Cells, Transformers, Rectifiers, etc.

Vol. II contains *working drawings* and directions for all sorts of Voltmeters, Ammeters, Galvanometers, Switches, Rheostats, Telegraph Keys, Sounders, Telephones, Shocking Coils, Spark Coils, Experiments, etc., etc.

Vol. III contains *working drawings* and directions for making all sorts of Dynamos, Motors, Electric Engines, Miniature Lighting Plants, Wireless Telegraph Apparatus, Tesla Coils, Wireless Telephone, Electroplating, Experiments, etc., etc.

Any of these wonderful books will be sent to you *postpaid* for **25 cents.**

COLE & MORGAN, Inc., *Publishers and Booksellers*
P. O. Box 473, C. H. Sta., New York City

INDEX to ELECTRICAL EXPERIMENTER SCIENCE & INVENTION

For Vol. 1, 2, 3, 4, 5
15c
EXPERIMENTER PUBL. CO.
Book Dept. 231 Fulton St., N. Y.



DUCK'S BIG 300 PP. Wireless & Electrical

Catalog is now as it always has been, the largest and most complete and dependable Wireless Catalog published. Mailed for 12c in stamps or coin which may be deducted on first order of one dollar. Catalog not sent otherwise. This catalog costs us twice the price of other catalogs.

Everything in wireless *worth while* is listed in this catalog. The experienced amateur will tell you to see our catalog before buying. You are thereby insured against an unwise purchase. It is the *Beacon Light* to guide you right in the selection of your wireless apparatus. No bigger or better values are obtainable elsewhere. Send for revised price list. It is yours for the asking.

THE WILLIAM B. DUCK CO., 230-232 Superior St., Toledo, Ohio

RADIO BULLETIN

The great impetus given to radio development during the war is fully symbolized by our new line of high grade radio apparatus. Electrically and mechanically modern and distinctive.

Send for free bulletin

A. H. GREBE & COMPANY

RICHMOND HILL NEW YORK



"BUNNELL" Goods are ALWAYS RELIABLE

Send for our **Wireless Manual No. 40 E.** *JUST OUT*

Our Condensers, Transformers, Head Sets, etc., are the acknowledged standard of High Grade Radio Apparatus.

The JOVE is the Best, Cheapest and Most Reliable Detector. Sample by mail for $1.44.

J. H. BUNNELL & Co., Inc., 32 Park Place, New York

→ Radio Amateurs ←

Write us today for a Free Copy of our New Bulletin of latest Radio Apparatus. We handle the products of fifty-three manufacturers of Radio Supplies and can take your order for any piece of Wireless Apparatus on the amateur market. Buying your radio apparatus through us will be as much to your benefit as to our profit. One order and one stamp will cover your entire needs.

Take Advantage of Our Free Information Department

where our Radio Expert is at your service.

Our Bulletins are now ready for Free distribution and supplements will be issued at frequent intervals. A postcard will bring you our Latest Bulletin and put your name on our Mailing List.

NATIONAL RADIO SUPPLY CO.

Dept. 100, 1405 U Street :: Washington, D. C.

"THERE'S MONEY IN IT"

AT HOME LEARN TELEGRAPHY AT HOME

MORSE AND WIRELESS

TEACH YOURSELF

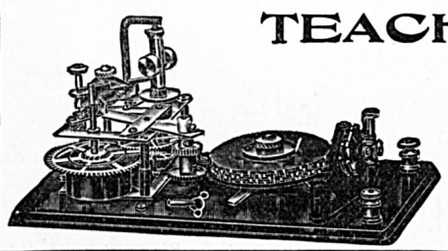

In half the usual time, at trifling cost, with the wonderful Automatic Transmitter, **THE OMNIGRAPH.** Sends unlimited Morse or Continental messages, at any speed, just as an expert operator would.

Adopted by U. S. Gov't. 4 styles. Catalogue free.

OMNIGRAPH MFG. CO.

39L Cortlandt St. New York

"(7) The establishment of a 'World-System' of musical distribution, etc.;

"(8) The universal registration of time by cheap clocks indicating the hour with astronomical precision and requiring no attention whatever;

"(9) The world transmission of typed or hand-written characters, letters, checks, etc.;

"(10) The establishment of a universal marine service enabling the navigators of all ships to steer perfectly without compass, to determine the exact location, hour and speed, to prevent collisions and disasters, etc.;

"(11) The inauguration of a system of world-printing on land and sea;

"(12) The world reproduction of photographic pictures and all kinds of drawings or records."

I also proposed to make demonstrations in the wireless transmission of power on a small scale but sufficient to carry conviction. Besides these I referred to other and incomparably more important applications of my discoveries which will be disclosed at some future date.

A plant was built on Long Island with a tower 187 feet high, having a spherical terminal about 68 feet in diameter. These dimensions were adequate for the transmission of virtually any amount of energy. Originally only from 200 to 300 K.W. were provided but I intended to employ later several thousand horsepower. The transmitter was to emit a wave-complex of special characteristics and I had devised a unique method of telephonic control of any amount of energy.

The tower was destroyed two years ago but my projects are being developed and another one, improved in some features, will be constructed. On this occasion I would contradict the widely circulated report that the structure was demolished by the Government which owing to war conditions, might have created prejudice in the minds of those who may not know that the papers, which thirty years ago conferred upon me the honor of American citizenship, are always kept in a safe, while my orders, diplomas, degrees, gold medals and other distinctions are packed away in old trunks. If this report had a foundation I would have been refunded a large sum of money which I expended in the construction of the tower. On the contrary it was in the interest of the Government to preserve it, particularly as it would have made possible—to mention just one valuable result—the location of a submarine in any part of the world. My plant, services, and all my improvements have always been at the disposal of the officials and ever since the outbreak of the European conflict I have been working at a sacrifice on several inventions of mine relating to aerial navigation, ship propulsion and wireless transmission which are of the greatest importance to the country. Those who are well informed know that my ideas have revolutionized the industries of the United States and I am not aware that there lives an inventor who has been, in this respect, as fortunate as myself especially as regards the use of his improvements in the war. I have refrained from publicly expressing myself on this subject before as it seemed improper to dwell on personal matters while all the world was in dire trouble. I would add further, in view of various rumors which have reached me, that Mr. J. Pierpont Morgan did not interest himself with me in a business way but in the same large spirit in which he has assisted many other pioneers. He carried out his generous promise to the letter and it would have been most unreasonable to expect from him anything more. He had the highest regard for my attainments and gave me every evidence of his complete faith in my ability to ultimately achieve what I had set out to do. I am unwilling to accord to some small-minded and jealous individuals the satisfaction of having thwarted my efforts. These men are to me nothing more than microbes of a nasty disease. My project was retarded by laws of nature. The world was not prepared for it. It was too far ahead of time. But the same laws will prevail in the end and make it a triumphal success.

Experimenters—**KNOBS**
BASES — INSULATION

Fine black composition base suitable for detector, fixed condenser, etc. The bottom has a cavity 3" x 1½" x ⅜". Over all dimensions 4¼" x 2" x ½". Two holes for binding posts and two for fastening down to table. Post paid.....30c

Knob 1¼ x ¾
Hole through center for mounting.
Post paid 20c

Knob 11/16 x 21/32
With 8/32 brass threaded bushing.
Post paid 20c

Contact points, switch levers, condenser plating, etc.

Bakelite panels, about

9 x 19 x ¼	Black XX	$4.00
19 x 19 x ¼	Black XX	8.00
9 x 19 x 3/16	Black XX	3.00
19 x 19 x 3/16	Black XX	6.00

A. H. CORWIN & CO.
924 Kinney Building Newark, N. J.

PREPARED!

The lifting of the wireless ban finds the Newman-Stern Co. fully prepared to meet the increased needs of its customers.

Tremendous stocks of apparatus, wires and raw materials, accumulated and reserved for the day when amateur wireless would be resumed, now assure our customers IMMEDIATE Service.

Ninety-nine of every hundred orders will be shipped within twenty-four (24) hours following their receipt.

Present prices are in accordance with price-change schedule effective Feb. 20, 1919, applying to Catalog C-3.

Present prices on any item listed in Catalog B-2 (Handy-Book) will be quoted on request.

The Newman-Stern Co
CLEVELAND, OHIO

CHEMICALS
for **THE EXPERIMENTER**

DON'T PAY FANCY PRICES for chemicals. Buy highest quality for lowest price. Our unique system of standardization guarantees you at all times the most for your money. Send today for interesting free booklet describing the money-saving, value-giving, N-S plan and listing hundreds of chemicals, chemical glass ware, and apparatus.

Send today for FREE Catalogue

THIS RELIABLE MAIL ORDER HOUSE world famed for its wireless telegraph apparatus and experimenters' supplies, has been urged by hundreds of its patrons to establish a chemistry department. In answer we offer what we believe to be the most complete amateur experimental chemistry in the U. S. Buy where you are always assured of *Standard Quality, Standard Quantity, Standard Packing, Standard Price.*

THE NEWMAN-STERN CO.
Department E E CLEVELAND, O.

STANDARDIZED N-S Co. CHEMICALS

The Newman-Stern System

Not Toys But Real Apparatus

the same as used by all operating companies. You had better send us your order immediately to insure prompt delivery, as this equipment will not last long at these prices.

110 Volt Hand Generators	3 bars, each	$3.00
	4 bars, each	4.00
	5 or 6 bars, each	5.00
Telephone transmitters with arms, each		.75
Good ringers complete with bells, each		.50
Telephone receivers, each		.75
Condensers, ½ to 2 M.F., each		.50
Induction coils, each		.50
Relays, each		1.50
Repeating coils, each		2.00
Real complete C.B. wall type telephone		4.50
Slightly used dry cells, per dozen		1.25

Please send money-order or cash with your order

ELECTRICAL SPECIALTY COMPANY
Dept. E, 48-50 So. Front St., Columbus, Ohio
Dept. E, 128 So. 11th St., Philadelphia, Pa.

Tesla Bulbs

(*Continued from page* 134)

scription of the phenomenon, as seen in a bulb without conducting electrode. It is observed under the following conditions:

"When the globe L (Figs. 1 and 2) is exhausted to a very high degree, generally the bulb is not excited upon connecting the wire *w* (Fig. 1), or the tinfoil coating of the bulb (Fig. 2) to the terminal of the induction coil. To excite it, it is usually sufficient to grasp the globe L with the hand. An intense phosphorescence then spreads at first over the globe, but soon gives place to *a white, misty light.* Shortly afterward one may notice that the luminosity is unevenly distributed in the globe, and after passing the current for some time the bulb appears as in Fig. 4. From this stage the phenomenon will gradually pass to that indicated in Fig. 5, after some minutes, hours, days or weeks, according as the bulb is worked. Warming the bulb or increasing the potential hastens the transit.

"When the brush assumes the form indicated in Fig. 5, it may be brought to a state of *extreme sensitiveness to electrostatic and magnetic influence.* The bulb hanging straight down from a wire, and all objects being remote from it, *the approach of the observer at a few paces from the bulb will cause the brush to fly to the opposite side, and if he walks around the bulb it will always keep on the opposite side.* It may begin to spin around the terminal long before it reaches the sensitive stage. *When it begins to turn around, principally, but also before, it is affected by a magnet,* and at a certain stage it is susceptible to magnetic influence to an astonishing degree. A small permanent magnet, with its poles at a distance of no more than two centimeters, will affect it visibly at a distance of two meters, slowing down or accelerating the rotation according to how it is held relatively to the brush. I think I have observed that at the stage when it is most sensitive to magnetic, it is not most sensitive to electrostatic, influence.

"When the bulb hangs with the globe L down, the rotation is always clockwise. In the southern hemisphere it would occur in the opposite direction, and on the equator the brush should not turn at all. The rotation may be reversed by a magnet kept at some distance. The brush rotates best, seemingly, when it is at right angles to the lines of force of the earth. It very likely rotates, when at its maximum speed, in synchronism with the alternations, say, 10,000 times a second. The rotation can be slowed down or accelerated by the approach or receding of the observer, or any conducting body, but it cannot be reversed by putting the bulb in any position. When it is in the state of the highest sensitiveness and the potential or frequency be varied, the sensitiveness is rapidly diminished. Changing either of these but little will generally stop the rotation. The sensitiveness is likewise affected by the variations of temperature. To attain great sensitiveness it is necessary to have the small sphere *s* in the center of the globe *L*, as otherwise the electrostatic action of the glass of the globe will tend to stop the rotation. The sphere *s* should be small and of uniform thickness; any dissymmetry of course has the effect to diminish the sensitiveness.

"The fact that the brush rotates in a definite direction in a permanent magnetic field seems to show that in alternating currents of very high frequency the positive and negative impulses are *not* equal, but that one always preponderates over the other.

"Of course, this rotation in one direction may be due to the action of the two elements of the same current upon each other, or to the action of the field produced by one of the elements upon the other, as in a



HB 16-Battery Charging Set

CHARGING AUTO BATTERIES will Pay $150 to $250 *Clear Profit* Every Month

All you need is HB Equipment. The business is waiting for you—*right now.* More cars are being driven than ever before, with batteries to recharge, and all new Fords are equipped with storage battery. Start **NOW** to get these big steady profits.

This HB 16-Battery Charger Can Be The Biggest Money-Maker In Your Garage

Recharge 1 to 16-volt batteries or equivalent in 12- or 24-volt batteries at once. Current cost 12 to 15c each. Owner pays 75c to $1.50. Figure those profits. Compare them with other branches of your business! HB Chargers last for years—sturdy, economical, dependable. Finest materials and construction. Long service with *quick, clean, permanent profits.*

$57 Puts This Money-Maker in Your Garage on Money-Back Guarantee

Balance in 10 monthly payments of $23 each. Earnings pay for machine. No electrical knowledge necessary to install or operate. Uses 2 or 3 phase city current. Furnished complete with 2 charging panels capable of charging 1 to 8 batteries each. No burn-outs or expensive renewals. Nothing to wear out or break. Sold on HB Absolute Money-Back Guarantee. Order now—you run no risk. Pin your $57 Check to this ad and mail *today* for trial order.

Hobart Brothers Company, Box 6E, Troy, Ohio
Successful Manufacturers Since 1893.

Commercial Telegraph Apparatus Bargains

Standard twenty ohm Telegraph Sounders at $2.00 each

Standard Telegraph Keys at 1.25 each

110 Volt A.C. Dynamos

Three Bar..... 1.75 each
Four Bar..... 2.25 each
Five Bar..... 2.75 each

For other bargains see pages 90 & 91

Skinderviken Telephone Equipment Co.
Abbreviated Address
STECO-2118-2136 N. Clark St. CHICAGO

Send To-day for the
"Electrical Worker's Friend"

An electrical book of 66 motor drawings with complete instructions for rewinding and reconnecting A.C. motors. Special at **$3.50**
Or write for full particulars of this valuable book.

SMITH & SMITH PUBLISHING CO.
1524 LOWRIE ST., N.S., PITTSBURGH, PA.

110-V. TRANSFORMERS

8 Volt Secondary

Consumes so little current will not move ordinary meter.

$1.00

Postpaid

Only $1.00

No. 10 gives 3 currents — 6, 12 and 18 volts secondary. Ideal for experimental work. A standard transformer, guaranteed. Complete with plug, $2.00 postpaid. Order from this ad.

NATIONAL TRANSFORMER CO.,
Dept. 13, 3124 No. California Ave., Chicago

Arnold Navy Model Loose Couple



Literature describing the above and new apparatus is now ready. Also shows the line of accessories so much desired by the amateur.

My knobs are of real hard rubber; switch points, binding posts, etc., are perfect, polished and plated.

SPECIAL

Round Dials for Condensers, Variometers, etc., made of hard rubber, the handsomest thing you can put on your set. Send 3c stamp for Bulletin.

J. F. ARNOLD
2082 Lexington Ave. Near 125th St., N. Y.
Established 1910

"The Livest Catalog in America"

Our big, new electrical cyclopedia No. 20 is waiting for you. Positively the most complete Wireless and electrical catalog in print today. 180 Big Pages, 500 illustrations, 300 instruments and apparatus, etc. Big "Treatise on Wireless Telegraphy." 20 FREE coupons for our 160-page FREE Wireless Course in 20 lessons. FREE Cyclopedia No. 20 measures 7x5¼". Weight ½ lb. Beautiful stiff covers.

WIRELESS

Send 6 cents in stamps or coin for which we will send our latest Cyclopedia Catalog No. 20 as described.

ELECTRO IMPORTING COMPANY
231 Fulton St., New York City

TELEGRAPHY

Both wire and wireless, and Station Agency taught thoroughly and quickly, BIG WAGES NOW PAID, some of our recent graduates procuring $138.00 per month to start. Great opportunities for advancement. Our school the oldest and largest—annual enrollment 600 students. Endorsed by railway, telegraph, wireless and government officials. Expenses low—chance to earn part. Catalog free. Write.

DODGE' INSTITUTE, 22nd St. Valparaiso, Ind.

WIRELESS IS SIMPLE

when the Summers' theories of wireless are applied to wireless systems, transmitting and receiving apparatus. Will advance the wireless art by leaps and bounds. Get on the right track with your experiments. This booklet should be in every home and school. United States and foreign copyrights. Price $2.00 registered postpaid to any part of the world.

Address FRANK E. SUMMERS, Memphis, Mo.

TELEGRAPHY AND RADIO

DAY AND EVENING CLASSES
SEND FOR PROSPECTUS
IN SUBJECT INTERESTED

EASTERN RADIO INSTITUTE
899-B Boylston St. Boston, Mass.

FRENCH WIRELESS

FROG made of steel with large clicker inside, used to learn telegraphy. GREAT FUN. SEND YOUR FRIENDS WIRELESS MESSAGES. SENT complete with code, and to make a big bundle we will send a Ford joke book. Parlor games, etc., all for 10c. **10c**

Dept. 72, American Toy Co., Lowell, Mass., U.S.A.

series motor, without necessarily one impulse being stronger than the other. The fact that the brush turns, as far as I could observe, in any position, would account for this theory. In such case it would turn at any point of the earth's surface. But, on the other hand, it is then hard to explain why a permanent magnet should reverse the rotation, and one must assume the preponderance of impulses of one kind.

"As to the causes of the formation of the brush or stream, I think it is due to the electrostatic action of the globe and the dissymmetry of the parts. If the small bulb *s* and the globe L were perfect concentric spheres, and the glass thruout of the same thickness and quality, I think the brush would not form, as the tendency to pass would be equal on all sides. That the formation of the stream is due to an irregularity is apparent from the fact that it has the tendency to remain in one position, and rotation occurs most generally only when it is brought out of this position by electrostatic or magnetic influence. When in an extremely sensitive state it rests in one position, and most curious experiments may be performed with it. For instance, the experimenter may, by selecting a proper position, approach the hand at a certain considerable distance to the bulb, and he may cause the brush to pass off by merely stiffening the muscles of the arm. When it begins to rotate slowly, and the hands are held at a proper distance, it is impossible to make even the slightest motion without producing a visible effect upon the brush. A metal plate connected to the other terminal of the coil affects it at a great distance, slowing down the rotation often to one turn a second.

"I am firmly convinced that such a brush, when we learn how to produce it properly, will prove a valuable aid in the investigation of the nature of the forces acting in an electrostatic or magnetic field. If there is any motion which is measurable going on in the space, such a brush ought to reveal it. It is, so to speak, a beam of light—frictionless, devoid of inertia.

"I think that it may find practical applications in telegraphy. With such a brush it would be possible to send dispatches across the Atlantic, for instance, with any speed, since its sensitiveness may be so great that the slightest changes will affect it. If it were possible to make the stream more intense and very narrow, its deflections could be easily photographed.

"I have been interested to find whether there is a rotation of the stream itself, or whether there is simply a stress traveling around the bulb. For this purpose I mounted a light mica fan so that its vanes were in the path of the brush. If the stream itself was rotating the fan would be spun around. I could produce no distinct rotation of the fan, altho I tried the experiment repeatedly; but as the fan exerted a noticeable influence on the stream, and the apparent rotation of the latter was, in this case, never quite satisfactory, the experiment did not appear to be conclusive.

"I have been unable to produce the phenomenon with the disruptive discharge coil, altho every other form of these phenomena can be well produced by it—many, in fact, much better than with coils operated from an alternator.

"It may be possible to produce the brush by impulses of one direction, or even by a steady potential, in which case it would be still more sensitive to magnetic influence."

Fig. 6 shows a practical application of the Tesla bulb. The bulb itself, as will be seen, is excited by means of a Tesla high frequency alternator which, in turn, is connected to the primary of a transformer. The secondary of the transformer is grounded at one end, while the other end of the transformer connects with the Tesla bulb.

Dr. Tesla, in an interview, stated that

(*Continued on page* 184)

USE HB BALL BEARING ELECTRIC MOTORS

HB Electrical Motors Save Power—Get Ball Bearing equipped HB Motors, as they save you a substantial sum each month on your power bills. Absolutely they are trouble-proof, economical, amply designed, just right for your requirements—one to 15 h.p. They substantially lower your power costs. Easy to install and operate. Require practically no attention.



$20.00 gives you an HB Ball Bearing Motor. The balance on easy terms. Suits your requirements. Let our engineering department advise you. Send in your problems. State kind of machinery you wish to run and type of current available. We can also furnish Battery Charging Outfits, Lighting Generators, etc. Pin this ad to your letterhead and mail for further information today.

HOBART BROTHERS COMPANY
Box 6E Troy, Ohio
Successful Manufacturers Since 1893



SMALL ENGINES

Perfected Gasoline Engines—½, 1 and 1½ h. p.—for Farm and Shop use. Price, $27.50 and up. Also,

WASHING MACHINES

We ship on trial. Send for Booklet and Special Offer.

SIEVERKROPP ENGINE CO.
1401—19th St., Racine, Wis.

STARTER for FORD CARS

Yankee Wireless 50¢

The only dependable wireless set at a low price. It is not a toy and with little practice you can send and receive clear messages anywhere as quick as a flash.



THE YANKEE

is for two complete stations—with Morse code and instructions for operating. We will also include our picture code attachment, which will enable the operator to send and receive pictures and photographs by wireless. The complete Yankee Wireless set can be obtained only from us. All charges paid for 50c money order.

A. & B. MFG. CO., 1303 Peoria St., Chicago, Ill.

DOLLAR ADDING MACHINE $1

Adds and multiplies with speed of expensive machines. Seven columns capacity. Remarkably simple in construction. Nothing to get out of order. Weight one ounce. Made of metal and celluloid. The ideal pocket, desk or home machine. Order today. The best way not to forget is to do it now.

L. J. LEISHMAN CO., Dept. 142, Ogden, Utah

MARKO

STORAGE BATTERIES

ARE GOOD—TRY ONE

Paul M. Marko & Co., Inc.
1402-1412 Atlantic Ave.
Brooklyn, N. Y.

SELENIUM CELLS

Guaranteed 99% pure selenium

Made by people who know their business, for the most difficult work, requiring very sensitive, quick acting cells.

Special cells to order.

THE SELENIUM LABORATORIES,
New York Offices, 56 West 45th St.

WIRELESS BOOKS *Send for Catalogue*

BUY NOW and Save a Dollar

PRACTICAL WIRELESS TELEGRAPHY
By E. E. Bucher
and **THE WIRELESS AGE** for one year,
$2.75. *Regular price, $3.75.*

WIRELESS PRESS, INC., 33 ELM ST., NEW YORK.

"BOW LEGS and KNOCK-KNEES" UNSIGHTLY

Send for booklet showing photos of men with and without THE PERFECT LEG FORMS.

PERFECT SALES CO.
140 N. Mayfield Ave., Dept. 50 Chicago, Ill.

INSYDE TYRES Inner Armor

for Auto Tires. Double mileage, prevent blow-outs and punctures. Easily applied in any tire. Thousands sold. Details free. Agents wanted. Amer. Accessories Co., Dept. 53, Cincinnati

ADVERTISING PAYS

It pays the man who advertises and it pays the man who answers ads. For advertising rates in the E. E., address

Advertising Dept., 233 Fulton St., N. Y.

The Buying Power of a Dollar

When we first launched the four-numbers-for-a-dollar special offer it did just what we expected it to do—proved that readers value

The PHOTO-PLAY WORLD

sufficiently to renew their subscriptions at the regular price—$3.50 a year.

If you are not a regular subscriber a dollar will bring you the next four numbers—just to get acquainted. Add 25 cents in Canada.

DOWNS PUBLISHING COMPANY
Bulletin Building Philadelphia, Pa.

LEARN WATCH REPAIRING

You can learn by our modern and original system of instruction every part of the Watch Repairing Trade at home as good or better than at a shop. You can earn money while learning and secure a well paying position or start in business after completing our course of instruction. Good watch repairers are always in demand and earn from $20 to $35 per week. For particulars apply to the

Milwaukee School of Watchmaking 166 Mason St, Milwaukee, Wis.

MUSIC TAUGHT FREE



In Your Home. Write today for our booklet. It tells how to learn to play Piano, Organ, Violin, Mandolin, Guitar, Banjo, etc. Beginners or advanced pupils.
American School of Music, 57 Lakeside Bldg., Chicago

"Hang Your Own Lighting Fixtures"

One Light Bracket $1.05—4 Light Shower $6.15 Semi-Bowls $5.85—Plate & Ball 85c, complete with glassware, Wired, Fine finishes. Send for Photos complete line.

ERIE FIXTURE SUPPLY CO.
Sta. C., Erie, Pa.

Combination A. C. and D. C.
Eight Inch DESK FAN



detachable plug and 8 ft. of cord. Will operate on A.C. or D.C. current, 100 to 125 volts, 30 to 60 cycles; weight 10 lbs.; black enamel finish; height 11½ in. A real fan—not a toy. Price $6.50. Agents wanted.

THE TEWNO CO.
150 Chambers St., New York

Learn in 6 Evenings

SHORTHAND Simplified
Learn Easily at Home

Practical *K. I. Shorthand;* quickly learned. You attain speed easily. Great saving in time and expense. Guarantee and *30 days' trial* given. Home study. Many endorsements. Used in Government service, in corporations, schools, professional and business offices, private use, etc. Brochure and specimen lesson *FREE.*

"Talk as fast as you like. I am taking it down in K. I. Shorthand."

KING INSTITUTE, ED-300, Station F, New York, N. Y.

Feldman's "Geyser" Electric Water Heater

Instantaneous Hot Water

FELDMAN MFG. CO.
1500 Times Bldg. New York City

"SEXUAL DISASTERS"
which actually happened. Written by one who knows. Does not hint at anything, but says what it means in plain language. Not sold in book-stores. Sent immediately, in plain wrapper, for $2.00. Monongahela Novelty Co., Box B-565, Monongahela, Pa.

How to Finance and Manufacture a Patent

(*Continued from page* 167)

ers in reference to handling and pushing our goods, when ready for the market (using models of our invention for demonstration) and secured several substantial orders for future delivery. We also consulted an advertising agency about the future advertising of our product.

When the machinery for our little factory was completed we were ready for operation. After a few test runs, everything moved smoothly. In a short time, our factory was busily engaged filling the orders we had secured before starting. Before many months our sales began to mount into large proportions. The public were demanding more and more of our product. Business men began to get interested in our invention and its success. They began to uncover idle money they did not possess when I first asked for their backing. Several offers to buy us out were made from time to time, which we declined. One day the head of a supply company where we obtained the material for making our finished product made us a very attractive offer which we accepted. He knew of our profits better than any one except ourselves. This business man, my partner, not only received his investment, but a handsome profit besides; and I received more money for my patent than would have been possible had I sold it for "Whatever I could get," as my good friends advised.

In conclusion, I wish to suggest the following: If your invention has merit, is a public benefit or necessity, or an attractive novelty, do not sell out for "Whatever you can get," unless it is mighty good. If it is worth your best efforts to originate and perfect, it is also worth further efforts to raise the capital to manufacture it yourself. You might as well receive its full value instead of allowing some one else to do so. However, if you are forced to sell, and feel you cannot command the ability and persistence required to finance it yourself—don't be too anxious to close the deal. Don't accept the first offer made you. Of course, you should not turn it down entirely, consider them all, then decide and you will be sure of getting a fair price.

If your invention is a good one, and investors want it bad enough, they will keep after you until you sell. Fame and fortune come to Inventors who work hard while they are waiting.

RADIOPHONE BETWEEN STORES.

A prominent electrical and radio manufacturing concern of New York City will install, as soon as the ban on sending is lifted, a complete Radio Telephone System between their factory and several branch stores, so as to relieve a greater portion of the land telephone traffic between these units of the organization.

PERPETUAL MOTION?

What promises to be the world's greatest invention, according to a modest inventor hailing from Jersey City, is the "harnessing of gravity" to run a perpetual motion power plant of millions of horsepower, supplying us forever and ever (??) with light, heat and power almost free. ! ! ! In the near future, he expects to give his invention a "showing," and bring it into the light, till then—"We're from Missouri," he'll have to show us. So, beware! fellow experimenters and line your pockets with fish hooks—for Ssh! The inventor has distributed illustrated stock-selling brochures by the millions to get the billions he needs in order to wish this marvelous invention on a long suffering and struggling public.

Men Wanted for Airplane INDUSTRY

Wonderful opportunities—great scope for advancement—and big pay—await you in the airplane industry. This does not mean actual flying, but in any and all of the various branches of the industry. It is the coming profession—the future means of transportation. U. S. Mail is already being carried by airplanes. Factories are springing up everywhere and trained men are in big demand.

Openings in Many Branches You can get into this profession while it is still in its infancy as a mechanic, engineer, repairman, instructor, inspector, builder, contractor, salesman or professional aviator. The minute you understand the science and mechanics of aviation you can step into a high-salaried position.

We Guarantee Our Training

We absolutely and unreservedly guarantee that our Home Training Course will enable you to qualify for a good position as soon as you graduate. The Course itself has been written by noted aeronautical engineers, and covers the entire fundamentals of practical aeronautics. Every lesson is written and illustrated so clearly that you cannot fail to understand it. **But see for yourself.** Take ten lessons. Then if you are not satisfied you are not out one cent. We guarantee satisfaction.

Prepare Now for a Big Future

Only by specialized instruction can you expect to succeed in aviation or in any line of business. Training alone will fit you for a big job—and NOW is the time to begin. Check and mail the coupon for Big Free Bulletin and Money-Back Guarantee.

AMERICAN SCHOOL
OF CORRESPONDENCE
Dept. A F-26 CHICAGO, U. S. A.

TRAINING THE KEY TO SUCCESS

Please send Free Bulletin and explain how I can qualify for the position checked. ASC

.....High School Graduate	.....Lawyer
.....Electrical Engineer	.....Business Manager
.....Elec. Light & Power Supt.	.....Certified Pub. Accountant
.....Hydroelectric Engineer	.....Accountant and Auditor
.....Telephone Engineer	.....Bookkeeper
.....Telegraph Engineer	.....Stenographer
.....Wireless Operator	.....Fire Insurance Expert
.....Architect	.....Sanitary Engineer
.....Building Contractor	.....Master Plumber
.....Civil Engineer	.....Heating & Vent. Engineer
.....Structural Engineer	.....Automobile Engineer
.....Mechanical Engineer	.....Automobile Repairman
.....Shop Superintendent	.....Airplane Mechanic
.....Steam Engineer	.....General Education Course
.....Draftsman and Designer	.....Common School Branches

Name .....

Address .....



WANTED — Railway Mail Clerks

Men-Boys 18 to 35
$1100 to $2000 Year
Common Education Sufficient
Sure pay.
Life job.
Pull unnecessary.

Franklin Institute
Dept. F101
Rochester, N. Y.

COUPON

Sirs: Send me, without charge, (1) sample Railway Mail Clerk Examination questions; (2) schedule showing places of all U. S. Government coming examinations; (3) list of other government jobs now open, and (4) free book describing them.

NAME .....

ADDRESS .....

WRITE THE WORDS FOR A SONG

We write music, guarantee publisher's acceptance. Submit poems on patriotism, love or any subject.
CHESTER MUSIC COMPANY
920 S. Michigan Ave., Room 313 Chicago, Illinois

FOR EXPERIMENTERS ONLY!!

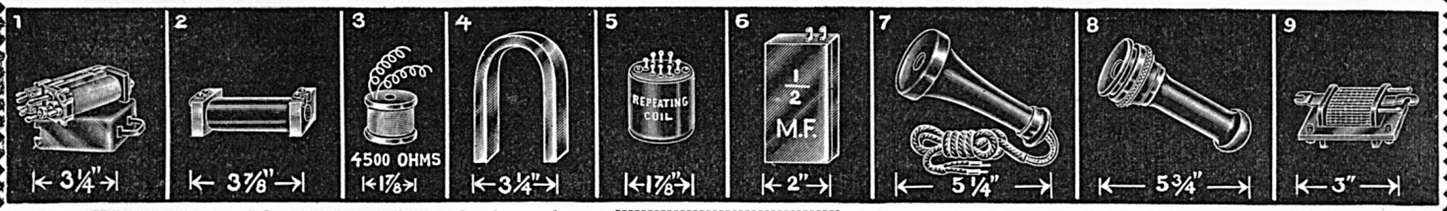

WE have in the past held many extraordinary sales, but we believe that the present one eclipses all by the wonderful values we are offering. The goods which we offer on this page are all standard telephone apparatus. Every piece we are offering is equipment that for one reason or another was discontinued by the telephone companies. If you wanted to buy any of the pieces which we offer herewith, from the manufacturers, the price would at least be ten times what we are asking for it. You can readily ascertain this for yourself by looking over our wonderful prices.

RUSH

Cut out and attach to your order. It will leave us within 24 Hours.

We have bought a large block of these goods and have a large quantity of every item on hand. Immediate shipment can be made on all of the goods in practically any quantity within reason. *Shipment within twenty-four hours* will be made if you use the adjoining coupon. This coupon saves you several days and your order will then be considered a rush order. We guarantee every piece to be as represented, and we will refund the money if goods are not exactly as claimed by us.

No. 1 TELEPHONE RELAY, 1500 ohms—has two silver-contact springs and is very sensitive. Can be used wherever a sensitive relay is needed. It is adjustable and can be used for a variety of purposes.
No. 1 Relay—shipping weight, 2 lbs. Price..... **$1.50**

NO. 2 STANDARD TELEPHONE Induction Coil, primary 1 ohm, secondary 55 ohms. Used wherever you need a good induction coil. Has primary and secondary and iron wire core; fibre heads.
No. 2 Induction Coil as described—shipping weight, 2 lbs. Price..... **$0.50**

NO. 3 STANDARD RESISTANCE wound with German silver wire—4,500 ohms, can be used as a choke or plain resistance, and has many other uses that readily suggest themselves to the experimenter.
No. 3 Standard Resistance as described—shipping weight, 4 oz. Price..... **$0.40**

NO. 4 HORSESHOE MAGNET, size 3¼ inches wide x 5 inches high. Will lift about 1 lb. Quality such as used on magnetos, which means the best.
No. 4 Horseshoe Magnet — shipping weight, 2 lbs. Price..... **$0.30**

NO. 5 REPEATING COIL (Transformer). This is a standard small repeating coil and is used by all telephone companies. It has 4 different windings and eight contacts. Entirely enclosed in iron. The resistance being respectively 72 and 120 ohms, and 90 and 100 ohms. Diagram is furnished. Can be used for wireless, for boosting signals, etc.
No. 5 Repeating Coil—shipping weight, 2 lbs. Price **$0.50**

NO. 6 ½ M.F. CONDENSER. This is a standard telephone condenser and has ½ microfarads. Condenser comes in neat metal casing. This condenser is used in connection with spark coils to absorb the vibrator spark. Invaluable for test buzzers to absorb spark and make the sound of buzzer more steady. Is also used by every experimenter in connection with wireless where a fixed capacity is needed. Several of these condensers should be in every experimenter's laboratory.
No. 6 Condenser, ½ M.F.—shipping weight, 1 lb. Price..... **$0.50**

NO. 7 DOUBLE POLE BELL TELEPHONE RECEIVER—hard rubber casing with 4 ft. cord and tips. Standard 75 ohms—very powerful magnets. This receiver can be used in connection with any ordinary telephone work, and you will even find it sensitive enough for short distance wireless work.
No. 7 Bell Telephone Receiver—shipping weight, 3 lbs. Price..... **$0.80**

NO. 8 STANDARD TELEPHONE RECEIVER with Metal Head. This receiver is made by Stromberg Carlson Co., with genuine hard rubber handle and ear cap. A very good fool-proof as well as sensitive receiver that cannot be put out of order if you try. Used for the same purpose as No. 7 Telephone Receiver.
No. 8 Standard Telephone Receiver—shipping weight, 3 lbs. Price..... **$0.75**

No. 9 IMPEDANCE COIL (Close Core Transformer). This is a very fine little transformer and is used extensively in connection with telephone work. It is in reality an A.C. transformer for which you would pay $5.00 if you had it made to order. The primary has 0.15 ohms, secondary 2000 ohms. It can be used for a variety of purposes that will suggest themselves to every experimenter. Can be used successfully to boost wireless signals. Also in connection with audions, etc. An A-1 instrument. Size 3 x 3 inches.
No. 9 Impedance Coil—shipping weight, 2 lbs. Price..... **$0.65**

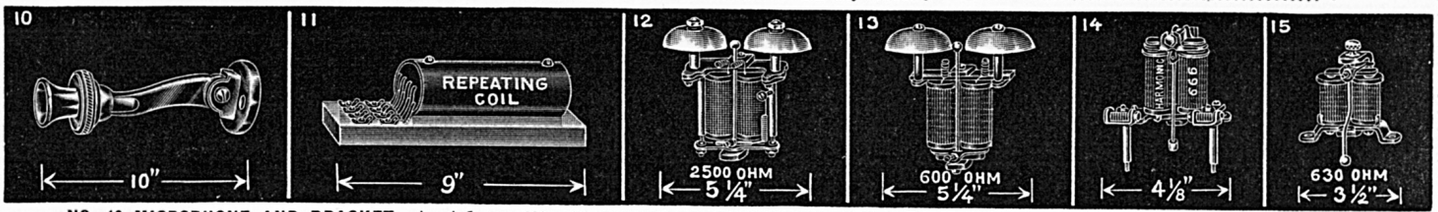

NO. 10 MICROPHONE AND BRACKET, An A-1 sensitive microphone of the carbon grain type. Has hard rubber mouthpiece and enamel steel bracket, the instrument being 10 inches long. This microphone, in connection with our No. 7 or 8 Receiver, will constitute a complete telephone outfit, good to speak 50 miles or more, at a remarkably low price.
No. 10 Microphone and Bracket—shipping weight, 5 lbs. Price..... **$1.00**

NO. 11 REPEATING COIL (Transformer). A standard repeating coil used for telephonic work. The coil windings are encased in an iron tube 2¼ inches in diameter. There are eight terminals for the four windings to connect to and the instrument is invaluable in connection with radio work to boost up signals, audion work, etc. Many interesting uses will be found for this coil. Resistances are: 100, 120, 145, 175 ohms.
No. 11 Repeating Coil—shipping weight, 8 lbs. Price..... **$2.00**

NO. 12 POLARIZED RINGER with Bells. The resistance of the two coils is 1250 ohms each. The armature is perfectly adjustable. Bell will work on any magneto. We also furnish blue print with ringer showing how *a first class polarized relay* can be made by anyone using only a few pieces of metal and screws.
No. 12 Polarized Ringer with Bells—shipping weight, 2 lbs. Price..... **$1.50**

NO. 13 POLARIZED RINGER with Bells. This is the same kind of ringer as the No. 12, except that it is not adjustable and that the resistance is less. First class in all respects. Blue print furnished with this to *make polarized relay* same as with No. 12. Solenoids on this ringer are worth more than the price we ask for the entire ringer, and do not forget a powerful magnet that goes with it.
No. 13 Polarized Ringer with Bells—shipping weight, 2 lbs. Price..... **$1.00**

NO. 14 HARMONIC RINGER. This ringer is also polarized and has a powerful magnet. It works on 66.6 cycles and any magneto will operate it if run at a certain speed. A very finely built instrument. Resistance of each coil being 200 ohms. Can be converted into a polarized relay by substituting a very fine leaf spring instead of the heavy one furnished. A most interesting instrument with which to experiment.
No. 14 Harmonic Ringer — shipping weight, 4 lbs. Price..... **$1.60**

NO. 15 RINGER without Bells—630 ohms. This also is a polarized ringer and has an adjustable armature. The adjustment is done by means of the top screw. A beautiful little instrument. With this instrument, too, we furnish a blue print showing how a *polarized relay can be built.* You should have several of these beautiful little instruments. They are worth their weight in gold; the powerful magnet alone being worth more than the price we ask for the entire instrument.
No. 15 Ringer—shipping weight, 2 lbs. Price..... **$0.80**



No. 55 5-bar magneto, 110 Volt A. C. Generator

This is one of the most powerful magnetos ever built, when manufacturers could afford to put good stuff into them; equipt with transmission, make and break, etc. Transmission wheels are all brass, crank handle furnished. This magneto, as well as the other ones listed below, will light a 110-volt lamp merely by turning the crank handle slowly. While this magneto gives alternating current only, it can be rewound so it will light up a number of four, six and 10-volt lamps, all depending upon the thickness of the wire you wind on the armature. As we furnish these magnetos, they will give a powerful alternating current and you will not be able to stand the current when grasping hold of the terminals. This makes an ideal shocking machine. All our generators can be transformed into a direct current machine by equipping it with a nome-made commutator. Machines are A-1 in all respects and every experimenter should have one of them in his shop. Many other experiments which can be performed with this machine will readily suggest themselves to any experimenter. The magnets furnished with these generators are very powerful, each one being able to lift one pound easily.

NO. 55 5-BAR MAGNETO GENERATOR as described—shipping weight, 25 lbs. Price..... **$4.00**

NO. 33 3-BAR GENERATOR, same as described above except that it has only 3 bars, and is somewhat smaller.
No. 33 3-bar Generator—shipping weight, 10 lbs. Price..... **$2.00**

NO. 44 4-BAR GENERATOR, same as No. 55 except that it has 4 bars, and is somewhat smaller.
No. 44 4-bar Generator—shipping weight, 15 lbs. Price..... **$3.00**

NO. 66 6-BAR GENERATOR, same as No. 55 except that it has one more magnet and the armature is somewhat larger and more powerful. This is the biggest type made and is extremely powerful.
No. 66 6-bar Generator—shipping weight, 30 lbs. Price..... **$4.50**

Complete Wall Set

This is a complete commercial telephone station. The cabinet is of polished oak, piano finish, within which is contained the powerful magneto, the 300 Ohm polarized ringer, and induction coil. The magneto is exceptionally efficient, being of the two bar type with brass gear transmission. The extra sensitive microphone, mouthpiece and two gongs are mounted on the front of the cabinet, giving the entire instrument that desirable appearance of compactness and efficiency. Guaranteed to work over 20 miles. The telephone receiver is a double poled one, and has a hard rubber case. Seven binding posts are provided for connections. The instrument is one which we can offer with pride to our patrons at a ridiculously low price. It is unobtainable anywhere else at less than $15.00 and is an instrument unequaled in value for the price we ask. Size over all 11" x 10" x 8". Shipping weight, 15 lbs.
No. 26 Long Distance Telephone Set..... $8.00

"The Livest Catalog in America"

Our big, new electrical cyclopedia No. 20 is waiting for you. Positively the most complete Wireless and electrical catalog in print today. 176 Big Pages, 400 illustrations. 300 instruments and apparatus, etc. Big **"Treatise on Wireless Telegraphy."** 20 FREE coupons for our 160-page FREE Wireless Course in 20 lessons. FREE Cyclopedia No. 20 measure 7x5¼". Weight ½ lb. Beautiful stiff covers.

ELECTRO IMPORTING CO., 231 Fulton Street NEW YORK

CARBON GRAIN TRANSMITTER

A special design of transmitter for long distance work. Is used on wireless telephone sets where a steady current of ¾ to 1 ampere is constantly required. Sizes over all 3¼ x 2½ inches. Shipping weight, 3 lbs. **No. 6080 Carbon Grain Transmitter as described..... $1.00**

ELECTRO IMPORTING COMPANY
231 Fulton St., New York City

I enclose herewith 6 cents in stamps or coin, to cover postage, for which please send me your latest Cyclopedia Catalog No. 20 as described.

NAME .....

ADDRESS .....

STATE.....E. E. 6-19

Electric Drive on U. S. S. "New Mexico"

(*Continued from page* 106)

structions from the captain, sent either by loud speaking telephones, by indicators, by lights, or by messenger. Following these instructions, the engineers standing at the switchboard can start the vessel forward, or start it backwards; they can make it go many different speeds in either direction; they can run all four of the motors from one of the power plants, or from the other power plant; they can even split up the load so that one power plant will run two of the motors forward and the other power plant will run the other two "astern." Another combination they can effect is that both power plants can equally share the load of driving the four motors—one to each propeller.

If one of the propellers becomes foul the engineer can disconnect this motor from the circuit, and then all of the power in the two power plants is available for the three remaining motors.

Giant Motor for Each Screw.

Can you imagine a motor twice as high as a six-foot man? Can you imagine *one motor capable of doing the work of* 30,000 *horses working at three eight-hour shifts?* If so, then you can appreciate the picture which these made in their steel compartments. One of these giant motors is provided for each of the four propeller shafts. The screw is at one end of the shaft in the water, and the motor is at the other end of the shaft inside the ship. One reason for their efficiency is the fact that the shaft can be short as the motor can be close to the propeller. There is an additional advantage also, because the turbine generators can be located near the boilers, and this permits of a short steam pipe. These very desirable features are a result of electric drive, because it doesn't make any difference what is located between the power plant and the motors.

No Reversing Turbines.

With electric drive, no reversing turbines are necessary, *the reversing is done electrically.* So with the electric drive, the turbine in the power plant always runs in the *same direction* and at highest efficiency.

Electrical propulsion not only does away with reversing turbines, but also does away with reduction gears. The wonderful simplicity of the arrangement can be appreciated also when you remember that the battleship *Pennsylvania* has ten turbines and the *New Mexico* only two.

Propeller More Efficient.

Electric propulsion has another advantage in making the propeller more efficient. This is because, within limits, the faster a propeller turns, the less efficient it becomes. If it turns too rapidly, it merely churns the water, and therefore does not effectively drive the ship ahead. When turbines are directly connected to the propeller shaft, the turbine rotates too slowly to be at its best efficiency, and the propeller shaft rotates too rapidly to operate at its maximum efficiency. So you can look at electric propulsion as a means of speed reduction; for it permits the turbines to rotate at their normally high speed, where they show the best fuel economy, and also permits the propeller to operate at comparatively low speed, where it gives the best driving economy. Without electric propulsion, there were at many different speeds practically "compromise" arrangements, by which either the turbine was rotating too slowly or the propeller too fast. This is obviated in the *New Mexico,* which is one reason why, with one filling of her oil tanks, she can cruise over 50 per cent. further than with any other equipment. In fact, she can go 7,500 knots at 12 knots speed before it will be necessary to take on any more fuel.

Nearly 100,000 Horse Power.

The *New Mexico* is practically the only 100 per cent. electric boat. This will be seen by glancing over, or, better yet, carefully reading the following table, showing her electrical equipment.

Particular attention is called to the loud speaking telephones, 104 in number, located all over the ship. From three different transmitting stations the bugle calls or other instructions can be sent to all or any one of five different groups of these telephones.

Electrical Equipment

2	main generators	33,000 h.p.
4	motors for propelling	33,000 h.p.
6	dynamos	3,000 h.p.
6	air compressors	400 h.p.
2	vacuum pumps	80 h.p.
20	motor generator sets totaling almost	100 h.p.
4	boat crane motors	220 h.p.
2	anchor motors	250 h.p.
4	winch motors totaling	200 h.p.
20	turret motors	1,300 h.p.
10	ammunition hoists	500 h.p.
2	refrigerator motors	40 h.p.
8	motors in kitchen (Peel potatoes, mix dough and cake, and wash dishes, cut butter, make ice cream, meat grinder, all bread and cakes baked electrically.)	15 h.p.
6	in carpenter shop	20 h.p.
10	in machine shop	30 h.p.
6	in laundry (5 machines use electric heat)	10 h.p.
5	motors in print shop totaling	6 h.p.
14	pumps water	140 h.p.
4	oil pumps	8 h.p.
50	electric air heaters	30 h.p.
12	searchlights	300 h.p.
160	fans, 60 blowers, 6 electric toasters, 1 electric percolator, 15 electric irons, 104 loud speaking telephones, 176 ship service telephones, 170 fire control telephones, 2 Sperry electric gyroscopic compasses, 7 portable electric drills, 2 electric glue pots, 6 electric soldering irons.	

Airplane Speeds 300 Miles an Hour

An airplane with a speed of from 200 to 300 miles an hour which will bring America within a short day's journey of Europe, is the prospect held out by the invention of a French engineer, Auguste Rateau.

At the present time without the invention the higher an airplane mounts the less power does its engine develop on account of the rarefying of the air. The loss at 15,000 feet, for instance, is 50 per cent.

M. Rateau's device is said to be very simple. It consists of an arrangement by which the exhaust from the engine works a small turbine, which compresses the air drawn into the engine to normal pressure so that the engine develops full power no matter what the altitude. As the resistance of an airplane decreases enormously at high altitudes, it follows that the higher a machine fitted with the new device mounts the greater will be its speed. This fact, it is declared, was demonstrated by the famous German long-range gun.

It has been found that a heavy day bombing machine whose speed at 15,000 feet ordinarily did not exceed 80 miles an hour, made 140 miles an hour when fitted with this invention, an increase of 75%.

Typewriter Sensation

FREE TRIAL

Use as You Pay

Only $4.00 a month until the low total price of $53.15 is paid, and the machine is yours.

This is absolutely the most generous typewriter offer ever made. Do not rent a machine when you can pay $4.00 a month and own one. Think of it—Buying a $100.00 machine for $53.15. Cash price, $50.35. Never before has anything like this been attempted.

Standard Visible No. 10 Smith Premier

Perfect machines, Standard size, full 84 character one motion keyboard. The entire line of writing completely visible at all times, has the tabulator, the two-color ribbon, with automatic reverse, the back spacer, ball bearing type bars, ball bearing carriage action, in fact every late style feature and modern operating convenience. **Comes to you with everything complete; tools, cover, operating book and instructions, ribbon, practice paper—nothing extra to buy. You cannot imagine the perfection of this beautiful reconstructed typewriter until you have seen it.** I have sold several thousand of these perfect latest style Model No. 10 machines at this bargain price and every one of these thousands of satisfied customers had this beautiful, strictly up to date machine on five days' free trial before deciding to buy it. I will send it to you F. O. B. Chicago for five days' free trial. It will sell itself, but if you are not satisfied that this is the greatest typewriter you ever saw, you can return it at my expense. You won't want to return it after you try it—you cannot equal this wonderful value anywhere.

You Take No Risk—Put in Your Order *Now*

When the typewriter arrives deposit with the express agent $9.15 and take the machine for five days' trial. If you are convinced that it is the best typewriter you ever saw, keep it and send me $4.00 a month until our bargain price of $53.15 is paid. If you don't want it, return it to the express agent, receive your $9.15 and return the machine to me. I will pay the return express charges. This machine is guaranteed just as if you paid $100.00 for it. It is standard. Over one hundred thousand people own and use these typewriters and think them the best ever manufactured.

The supply at this price is very limited, the price will probably be raised when my next advertisement appears, so don't delay. Fill in the coupon today—mail to me—the typewriter will be shipped promptly. There is no red tape. I employ no solicitors—no collectors—no chattel mortgage. It is simply understood that I retain title to the machine until the full $53.15 is paid. You cannot lose. It is the greatest typewriter opportunity you will ever have. **Do not send me one cent. Get the coupon in the mails today—sure.**

Harry A. Smith, 738, 218 N. Wells St., Chicago

H. A. SMITH, 738, 218 N. Wells St., Chicago, Ill.

Ship me a No. 10 Smith Premier F.O.B. Chicago, as described in this advertisement. I will pay you the $44.00 balance of the special $53.15 purchase price, at the rate of $4.00 per month. The title to remain in you until fully paid for. It is understood that I have five days in which to examine and try the typewriter. If I choose not to keep it I will carefully repack it and return it to the express agent. It is understood that you give the standard guarantee for one year.

Name .....

Address .....

.....

READ THE CLASSIFIED ADS. ON PAGES 188-190

"The National Authority on Electric Wiring for Twenty-Five Years"

All You Need to Know About Wiring

is in the Latest Edition of

"Standard Wiring"

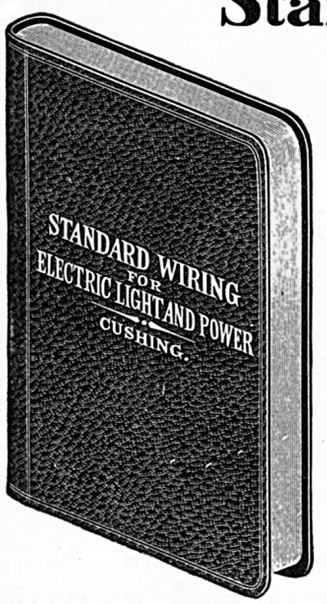

THIS year's edition, completely revised to date, is the only accurate book on electric light and power wiring and construction published.

The National Electrical Code, with all its new rules, is explained and illustrated. 52 of the latest and simplest tables which show, at a glance, just what size of wire is needed for any kind and size of lighting or motor installation, for any voltage, current and drop desired for any system. Direct Current, Alternating Current, single, two or three-phase. The latest Code Rules on grounding required on all work.

How to install and operate generators, motors and every kind of wiring device with diagrams of connections. Special chapters on illumination, House Wiring, Electrical Units and their Equivalents. The latest lamp data. Proper symbols to use to indicate outlets, etc., etc.

It Will Make You an Expert Wireman

Leather Cover - Pocket Size - 375 Pages - Price $1.50

Sent to any address, postpaid, on receipt of price

H. C. Cushing, Jr., 10 West 40th St., New York

YOUR OPPORTUNITY

Canceled Government Contracts

We have secured a large quantity of Small Motors, Generators and Charging Outfits. This material is new, still in original cases and carries the full factory guarantee.

This is Your Opportunity to buy new, guaranteed Electrical Apparatus of Standard Manufacture



Battery Charging Outfits

For use on 110 volt, A. C., 60 cycle, single phase current only.

60 watts, 8 volts, 10 amperes . $48.50
130 watts, 80 volts, 5 amperes . $68.50
150 watts, 15 volts, 10 amperes . $68.50
300 watts, 80 volts, 10 amperes . $94.50

All outfits complete with switchboard as cut shown.



1/2 H.P. INDUCTION MOTOR $32.50
110 or 220 volts, A. C. 60 cycle, single phase, 1750 R. P. M.

ALL MOTORS COMPLETE AS CUT

1/4 H.P. 110 volts A. C., 60 cycle, single phase 1750 R. P. M.

WASHING MACHINE MOTOR

Suitable for operating Small Compressors, Coffee Grinders, Bottle Washers, Lathes Drill Presses, etc. $18.50

Mail $5.00 cash or Money Order. We will send C. O. D. subject to full examination.

MONEY BACK GUARANTEE

WRITE FOR CATALOGUE. BARGAINS IN MOTORS AND GENERATORS. SPECIAL QUANTITY PRICES

220 volts **POLYPHASE MOTORS** 1750 RPM.
60 cycle, 2 or 3 phase. Complete, pulley and base
1 H. P. $59.50 3 H. P. $ 84.50
2 H. P. $72.50 5 H. P. $102.50

NEW MOTORS

110-220 volts **REPULSION MOTORS** 1800 RPM.
60 cycle, single phase. Complete with pulley.
1/2 Hp. $44.50 1 Hp. $67.50

MANUFACTURERS' DISTRIBUTER

CHAS. H. JOHNSTON - West End - PITTSBURGH, PA.

What 15c will bring You from the Nation's Capital

Washington, the home of the Pathfinder, is the nerve center of civilization; history is being made at this world capital. The Pathfinder's illustrated weekly review gives you a clear, impartial and correct diagnosis of public affairs during these strenuous, epoch-making days.

The little matter of **15c** in stamps or coin will bring you the Pathfinder **13** weeks on trial. The Pathfinder is an illustrated weekly, published at the Nation's center, for the Nation; a paper that prints all the news of the world and tells the truth and only the truth; now in its **26th** year. This paper fills the bill without emptying the purse; it costs but $1 a year. If you want to keep posted on what is going on in the world, at the least expense of time or money, this is your means. If you want a paper in your home which is sincere, reliable, entertaining, wholesome, the Pathfinder is yours. If you would appreciate a paper which puts everything clearly, fairly, briefly—here it is. Send **15c** to show that you might like such a paper, and we will send the Pathfinder on probation **13** weeks. The 15c does not repay us, but we are glad to invest in new friends. **The Pathfinder, Box 576, Washington, D. C.**

Tesla Bulbs

(*Continued from page* 180)

the best way to use the bulb for such experiments is when the shaft of light is in the position as shown in Figs. 5 and 6, at rest, but in a state of equilibrium inconceivably delicate. This is fully described above in Dr. Tesla's lecture. The inventor states that in such a condition, the shaft of light is marvelously sensitive to magnetic disturbances. Dr. Tesla informs us that a toy permanent horseshoe magnet not longer than ½" and with its poles ⅛" apart could with ease throw the shaft of light out of its normal direction across the whole room. In our illustration, an electromagnet is shown a few inches away from light ray, and we can imagine a slot in a screen in such a way that normally no light falls thru it. If, however, very faint radio-telegraphic impulses surge thru the electromagnet, the light ray will immediately become displaced, and will fall into the slot. Inasmuch as this shaft of light has no inertia, it will follow exactly the dot and dash impulses surging thru the electromagnet, no matter how rapidly they take place. They can then either be read off by the eye, or if desired, can be registered upon a fast moving film. This method will, of course, only be used where the transmission is made at high speed, and where it would be impossible for an operator at the receiving end to follow the dots and dashes with the eye.

The method shown by us in Fig. 6, of course, represents only one. Many others can undoubtedly be evolved to use the Tesla bulb to advantage.

STATEMENT OF THE OWNERSHIP, MANAGEMENT, CIRCULATION, ETC., REQUIRED BY THE ACT OF CONGRESS OF AUGUST 24, 1912, of Electrical Experimenter, published monthly at New York, N. Y., for April 1, 1919.

State of New York, County of New York—ss.

Before me, a Notary Public in and for the State and county aforesaid, personally appeared Hugo Gernsback, who, having been duly sworn according to law, deposes and says that he is the Editor of the Electrical Experimenter, and that the following is, to the best of his knowledge and belief, a true statement of the ownership, management, etc., of the aforesaid publication for the date shown in the above caption, required by the Act of August 24, 1912, embodied in section 443, Postal Laws and Regulations:

1. That the names and addresses of the publisher, editor, managing editor, and business manager are: Publisher, The Experimenter Publishing Co., 233 Fulton Street, New York City; Editor, Hugo Gernsback, 233 Fulton Street, New York City; Managing Editor, Harry Winfield Secor, 233 Fulton Street, New York City; Business Manager, Hugo Gernsback, 233 Fulton Street, New York City.

2. That the owners are: Experimenter Publishing Co., 233 Fulton Street, New York City; Hugo Gernsback, 233 Fulton Street, New York City; Sidney Gernsback, 233 Fulton Street, New York City; Mrs. K. Hymes, 233 Fulton Street, New York City; Harry Winfield Secor, 233 Fulton Street, New York City.

3. That the known bondholders, mortgagees, and other security holders owning or holding 1 per cent or more of total amount of bonds, mortgages, or other securities are: None.

4. That the two paragraphs next above, giving the names of the owners, stockholders, and security holders, if any, contain not only the list of stockholders and security holders as they appear upon the books of the company but, also, in cases where the stockholder or security holder appears upon the books of the company as trustee or in any other fiduciary relation, the name of the person or corporation for whom such trustee is acting, is given; also that the said two paragraphs contain statements embracing affiant's full knowledge and belief as to the circumstances and conditions under which stockholders and security holders who do not appear upon the books of the company as trustees, hold stock and securities in a capacity other than that of a bona fide owner; and this affiant has no reason to believe that any other person, association, or corporation has any interest direct or indirect in the said stock, bonds, or other securities than as so stated by him.

5. That the average number of copies of each issue of this publication sold or distributed, through the mails or otherwise, to paid subscribers during the six months preceding the date shown above is —(Required only of daily publications.)

(SEAL) H. GERNSBACK.

Sworn to and subscribed before me this 4th day of April, 1919.

BEATRICE K. OWEN.

(My commission expires March 30, 1921.)

Choke Coils: Theory and Design

by Prof. F. E. Austin

(*Continued from page* 140)

It is evident that with a current of 13.9 amperes in a resistance of 2.9 ohms, there will be considerable heating effect, denoted by $R_x I^2_{dc} = 2.9 \times 13.9^2 = 560.3$ watts. If the current passes thru the circuit for one hour, about one-half kilowatt hour of energy will be paid for, which is simply a *heat waste* in the auxiliary resistance R_x.

When connected with a 110 volt alternating current circuit, the current of 13.9 amperes was maintained without this heat loss, simply because of the counter-electromotive-force of induction of the coil itself.

The financial saving effected by the use of a choke coil is therefore very apparent, since the coil reduces the current in the circuit from 22 to 13.9 or 8.1 amperes, at no operating expense for power.

The usual condition governing the use of a choke coil is either the amount of current to be past thru the coil is known, or the amount of pressure reduction is known.

The size of the wire constituting the coil must be large enough to carry the desired current without overheating the coil. The choking effect of any coil depends upon the *square of the number of turns* of wire composing the coil. That is, if the *number of turns* on a coil are *doubled,* its choking effect is increased *four* times.

A very serviceable choke coil for a wide range of choking effect may be made by winding ten pounds of No. 14 double cotton covered copper wire in two sections on a hard fiber tube, measuring 2 inches in outside diameter, and 9½ inches long. The tube should be provided with wooden ends about 4½ inches square and ¾ inch thick, with a middle partition of wood ¾ inch thick. It will be advisable to shellac the insulated wire very thoroly and allow it to dry before using the coil.

An iron core should be made up of about No. 18 iron wire stock, carefully varnished with shellac varnish, and measuring about 14 inches long by 1¼ inches in diameter.

Such a coil will carry as high as 15 amperes for a short time and as high as 5 amperes for a long period without seriously heating.

With both sections in series, without an iron core and with an applied pressure of 110 volts at 60 cycles, the current in the coil will be about 6 amperes. The insertion of an iron core such as described above will reduce the current to less than ½ ampere.

With one section of such a coil, connected across 110 volts at 60 cycles, with no iron core, the current will be nearly 12 amperes, and by inserting the iron core may be gradually reduced from 12 amperes to less than one ampere.

Such a coil may be connected in series with other coils or lamps such as an arc lamp and the desired pressure applied to the apparatus. In using a choke coil always have the iron core inserted in the coil before closing the circuit, so as to have *maximum* choking effect in operation at the *start.*

The effect of the iron core is to greatly increase the coefficient of inductance L, thus increasing the numerical value of the term $2 \pi f L$. The iron core takes the place of a very large number of turns of wire, greatly reducing the expense of construction.

A very useful equation by which choke coils may be designed is as follows:

$$L = \frac{4 \pi n^2 \mu A}{10^9 b};$$

in which L denotes the inductance of a coil in *henries;* n denotes the number of turns on the coil, μ denotes the so-called magnetic permeability of the medium (iron, etc.), in-

(*Continued on page* 187)

Learn to Treat Disease This Way

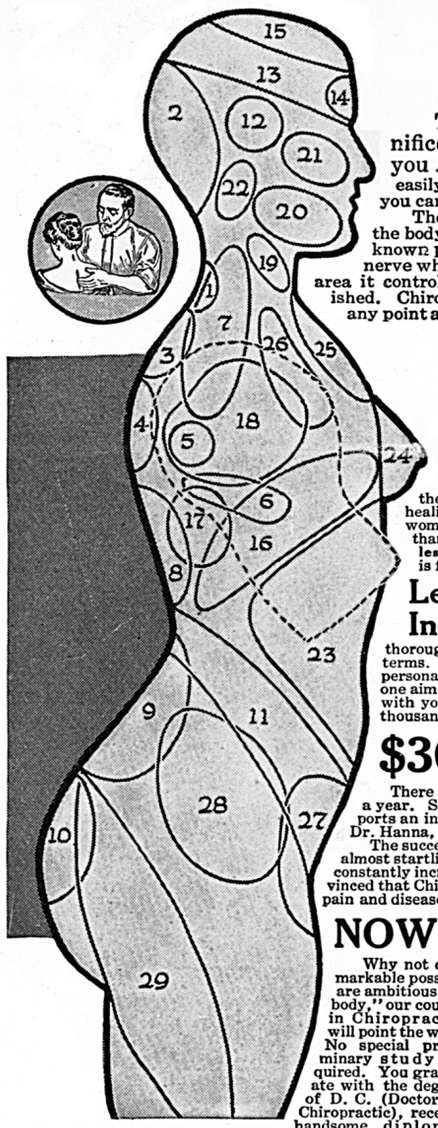

This is a small reproduction of one of 22 magnificent charts **all of which** we want to send you **ABSOLUTELY FREE,** just to show you how easily you can master Chiropractic and how successfully you can treat disease by this modern drugless healing method. These charts show the different pain and nerve areas of the body. The science of Chiropractic is based upon the well known principle that when there is bone pressure on a trunk nerve where it leaves the spinal column there will be pain in the area it controls; and that by relieving the pressure the pain is banished. Chiropractic teaches you how to locate nerve pressure at any point along the spinal column and how to relieve it.

BE A DOCTOR OF CHIROPRACTIC

Advanced Science of Spinal Adjustment

The great profession that within the past few years has taken the longest forward strides ever known in the history of drugless healing. It has called to its ranks thousands of ambitious men and women from every walk of life. Today it is calling more insistently than ever because the **tide has turned strongly in favor of drugless healing. Right now** the demand for Doctors of Chiropractic is far greater than the supply.

Learn at Home In Spare Time

The American University method of teaching enables you to study by mail or in class and obtain a complete mastery of Chiropractic in the shortest time consistent with thoroughness, while you hold your position. You can pay on easy terms. From the day you enroll your instruction will be under the personal direction of a splendid faculty of Chiropractic experts. Our one aim will be to make you successful. We will work whole-heartedly with you to advance **your** interests so that in a short time **you,** like thousands of Chiropractors, can earn a good income.

$3000 to $5000 a Year

There are many instances of Chiropractors earning from $3000 to $5000 a year. Some upwards of $10,000. Dr. M. D. Moore, of Kentucky, reports an income of $9,000 a year. Dr. L. H. Roche, New Jersey, $5,000; Dr. Hanna, of Kentucky, over $5,000 yearly.

The success of Chiropractors in many cases has come so quickly as to be almost startling. And yet, it is not to be wondered at when you consider the constantly increasing number of intelligent, thinking people who are now convinced that Chiropractic is the common-sense and really scientific way to relieve pain and disease and who, therefore, **demand the services of Chiropractors.**

NOW—Your Great Opportunity

Why not qualify **now** for this splendid profession that offers such remarkable possibilities for making **you** prosperous and independent? If you are ambitious to make money, increase your social standing and be "somebody," our course in Chiropractic will point the way. No special preliminary **study** required. You graduate with the degree of D. C. (Doctor of Chiropractic), receive handsome **diploma,** FREE, and are ready at once to open your office.

Get Free Charts offer at once. Regular value of the 22 magnificent charts is $31.50. Many of these charts are handsomely lithographed in life-like colors. Mail coupon and get all the facts. We will send you our beautiful new illustrated book, full particulars regarding course, easy terms, together with free charts offer immediately. Don't put it off—mail coupon or send your name on a postal card—**today.**

AMERICAN UNIVERSITY
Manierre Bldg., Dept. 490 Chicago, Ill.

AMERICAN UNIVERSITY
Manierre Bldg., Dept. 490 Chicago, Ill.

Without cost or obligation send me by mail, your new illustrated, 72-page book and your Free Charts offer.

Name.....

Street No. or R.F.D..... .....

City..... .....State.....

CONCENTRATION SPELLS SUCCESS

When **rightly** used, but when **wrongly** used it **is sure** to bring failure.

Most persons use their Concentration **wrongly** by concentrating on that which annoys, irritates and makes for failure.

You lock the doors and windows of your home to keep out thieves who would steal your property, but do you lock the doors and windows of your thought world and so keep out the power, ambition and ability?

Concentration when **rightly** used is a man's greatest asset but when **wrongly** used becomes his greatest liability.

Do you use your Concentration **rightly** or **wrongly?**

Has your Concentration brought you success or failure; happiness or sorrow; health or sickness; brilliancy of mind or loss of memory?

"Concentration —Its Mentology and Psychology" teaches how to develop and use one's Concentration **rightly.**

The person who can concentrate **rightly** for what he wants, when and where he wants to—whether it is for money, health, love, increased business, political power, social position, a better job, good memory or anything else he may desire—has at his command **the greatest power in the world**—a power which, when he learns to use it **rightly** gives him the **mastery of himself and his environment.**

You have this **power** and can learn to use it **rightly** by persistently applying the lessons taught in Dr. Sears book.

Take no substitutes; none other "just as good." Price 50c paper; 75c cloth, postpaid. **Money back if you want it.** For sale at first class book stores or by mail direct from publishers.

CENTRE PUBLISHING COMPANY
Suite 678, 110 W. 34th Street (at Broadway), New York

Note—Dr. F. W. Sears lectures Sundays 11 A. M. in the Criterion Theatre, Broadway at 44th St., New York City

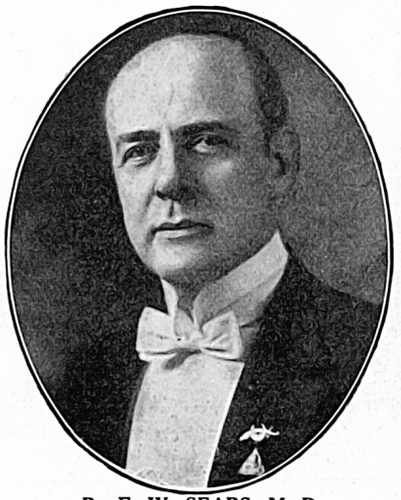

By F. W. SEARS, M. P.
(Master of Psychology)

FREE TO YOU!

Read this Remarkable Offer!

OFFER No. 1

Wireless Course

The most comprehensive Wireless Course ever printed. Contains 160 pages, 350 illustrations. Size of book 6¾"x10". Very fine flexible cloth cover.

FREE with a year's subscription.

Add 5c for postage

OFFER No. 2

Experimental Electricity Course

This masterpiece contains 160 pages, 400 illustrations. Size of book 5"x9". Printed on extra thin paper, so book can be slipped into pocket. Handsome flexible cloth cover.

FREE with a year's subscription. Add 5c postage

OFFER No. 3

How to Make Wireless Sending Apparatus
By 20 Radio Experts

How to Make Wireless Receiving Apparatus
By 20 Radio Constructors

These books are by far the most successful wireless books on the market. Size of each book 5"x7", well bound on good book paper. Covers in two colors. We really cannot praise these books too highly. Each book contains 100 pages and from 88 to 90 illustrations. **BOTH** books **FREE** with a year's subscription. Add 5c for postage

This is a very limited offer. It may be withdrawn at any time, due to the tremendous cost of paper, which IS JUST DOUBLE WHAT IT WAS ONE YEAR AGO. We have only a limited supply of these fine books on hand; after they are gone we cannot reprint the books until conditions become normal again. **Now is your chance.**

The publishers of this journal have earned an enviable reputation of giving more than 100 cents' worth for each dollar spent with them. Profit by this liberal opportunity NOW; it may never be made again.

HERE'S THE OFFER

Subscribe to the ELECTRICAL EXPERIMENTER for one year, at the regular subscription price of $2.00 per year (Canada, foreign and N. Y. C. $2.50) and we will send you either books shown in one of the above offers. If you subscribe for two years, two offers will be given, etc.

If you are a subscriber at present take advantage of this wonderful opportunity anyway. If you do, we will extend your present subscription.

This Offer Limited. *Act Now.*

EXPERIMENTER PUB. CO.
223 FULTON STREET NEW YORK CITY

FILL IN — TEAR OUT — AND MAIL

6-19

Gentlemen: Please enter my subscription to the ELECTRICAL EXPERIMENTER for the term of .... year..for which I enclose herewith $..... You will also send me at once FREE your book..... as per offer No.....

.....

.....

Name.....

Address.....

The Rogers' Underground Aërial for Amateurs

(*Continued from page* 137)

specified, where the transmitting set is one employing an audion oscillation generator. The voltage in this case will not be extremely high, and special precautions need not be taken to provide extra heavy insulation on the buried antenna. Official tests by the U. S. Navy have shown transmission by radio over 50 miles with the Rogers underground antenna. *The wire in such a case, however, should be especially well insulated* to stand the higher voltage.

Regarding loop aërials in general, it would appear that we can expect a great deal from them, as some of the really remarkable results achieved during the war would seem to point out. The number of turns and the amount of wire to be used in a spiral antenna, such as shown at Figs. 7 and 8, will vary of course for different wave lengths, etc., and here is where the Radio Amateur will have a chance to carry out some original experiments, which may net him some real knowledge, fame and money. Another form of loop antenna, so-called, and which has been tried out several years ago with such success that European stations could be copied in a laboratory located in Florida, is one composing a square form, several feet in height. This was used, as just mentioned, to receive stations using fairly long wave lengths, say from 8,000 to 12,000 meters, W. L. Here the insulating form was wound with a layer comprising several hundred turns of insulated wire, such as ordinary annunciator wire. This antenna was successfully used in some tests made by the Marconi radio engineers at a laboratory in Florida several years ago. Trans-Atlantic radio reception was effected at the radio laboratory of Union College, Schenectady, N. Y., just prior to America's entrance into the world war. This aërial comprised about two dozen turns of No. 14 or 12 bare or R.C. wire, mounted on porcelain knob insulators screwed on the inside wall of the laboratory. The turns were spaced about 3 inches apart. The inside turn was 3 feet square. Flexible leads, fitted with clips, serve to connect as many turns as desired.

Choke Coils: Theory and Design

By Prof. F. E. Austin

(*Continued from page* 185)

side the coil, A denotes the cross-sectional area in square centimeters of the central hole thru the coil, and b denotes the length of the *coil* (not of the wire) in centimeters. For air the magnetic permeability μ is 1. For an iron core μ varies considerably, according to the kind of iron used. For ordinary iron μ will be between 1,500 and 2,000 which shows how L increases from an air core to an iron core value. Consult any text-book containing a magnetization table, which gives the various permeability values for different flux densities. The flux density in each case depends upon the ampere-turns produced by the coil; this value is found by multiplying the amperes by the number of turns in the coil. Thus it is seen how the value L constantly varies as the core is moved in and out of the coil, or the number of turns varied, as well as any variations of the amperage, which would change the flux and in turn the permeability. It is usual to allow 1,000 circular mils per ampere in designing choke coil or transformer windings; a common core flux density is 25,000 to 30,000 lines per square inch of cross-section.

Learn Public Speaking

10 LESSONS FREE

Write — quick — for particulars of this extraordinary offer; an opportunity you will never forget if you take advantage of it. Ten lessons in effective public speaking absolutely FREE to those who act promptly, to introduce our course in localities where it is not already known.

We teach you by mail to become a powerful and convincing speaker—to influence and dominate the decisions of one man or an audience of a thousand. We have trained hundreds and helped them to increase their earnings and their popularity. Learn, in your spare time at home, how to overcome "stage fright" and conquer fear of others; how to enlarge your vocabulary; how to develop self-confidence and the qualities of leadership; how to RULE others by the power of your speech alone; how to train your memory. Our

WHAT THE COURSE TEACHES YOU.

How to talk before your club or lodge;
How to address board meetings;
How to propose and respond to toasts;
How to make a political speech;
How to tell entertaining stories;
How to make after-dinner speeches;
How to converse interestingly;
How to write better letters;
How to sell more goods;
How to train your memory;
How to enlarge your vocabulary;
How to develop self-confidence;
How to acquire a winning personality;
How to strengthen your will power and ambition;
How to become a clear, accurate thinker;
How to develop your power of concentration;
How to be the master of any situation.

New Easy Method

perfected and taught only by Prof. R. E. Pattison Kline, former Dean of the Public Speaking Department of the Columbia College of Expression, can be learned in 15 minutes a day. Prof. Kline is one of the foremost authorities in the country on public speaking and mental development. Do not let this chance escape you.

Offer Limited

Send This Free Coupon Now

This Special Offer of TEN LESSONS FREE is made strictly for advertising purposes and will be withdrawn without notice. Write now, before it expires, and receive full particulars with enrollment blank by return mail. No obligations of any kind. Just tear off and mail this free coupon—or a postal will do.

FREE LESSONS COUPON

North American Institute,
744A Manhattan Bldg., Chicago

I am interested in your course in Effective Public Speaking and your offer of ten lessons free. Please send full particulars. It is understood that this request places me under no obligation of any kind.

.....

.....

Opportunity Ad-lets

YOU will find many remarkable opportunities and real bargains in these columns. It will pay you to read and investigate the offerings made every month by reliable firms, dealers and amateurs from all over the country. No matter what you may be seeking, whether supplies, automobile accessories, the opportunity to make money, or anything else, you will find listed here the best and most attractive specials of the month.

Advertisements in this section seven cents a word for each insertion. No advertisement for less than 50c accepted. Name and address must be included at the above rate. Cash should accompany all classified advertisements unless placed by an accredited advertising agency. Ten per cent discount for 6 issues, 20 per cent discount for 12 issues. Objectionable or misleading advertisements not accepted. Advertisements for the July issue must reach us not later than May 22.

The Circulation of the Experimenter is over 100,000 and climbing every month

EXPERIMENTER PUBLISHING CO., INC., 233 Fulton Street, New York, N. Y.

Automobile Accessories.

Auto Motors and Supplies. Buick, Hupp, Franklin, Michigan, Everett, Hudson, Chalmers. Both water and air cooled motors, $40.00 each and up. Bosch Magnetos, $15.00 each and up. Presto Tanks, $5.00. Coils, Carburetors, Head Lamps, Horns, Air Compressors, Generators, Starters. Write for bargain bulletin second-hand Auto accessories. Johnston, West End, Pittsburgh, Pa.

Honeycomb Radiators for Fords. Four times cooling capacity. Built extra heavy to outlast your car. Factory to consumer, eighteen dollars, cash with order. Write Wilson, 44 Riley St., Buffalo, N. Y.

Tite-Loc Khaki Cloth back inner-tube patching stock, with cement and emery cloth, $1.00 package for 75c until July 15th. Walter Clifford, West Spruce St., Shamokin, Pa.

Fords run 34 miles per gallon with our 1919 carburetors. Use cheapest gasoline or half kerosene. Start easy any weather. Increased power. Styles for all motors. Runs slow high gear. Attach yourself. Big profits for agents. Money back guarantee, 30 days trial. Air-Friction Carburetor Co., 270 Madison St., Dayton, Ohio.

Ford power Mechanical Products greatly increase ability Ford Cars, Sedans, Trucks, Tractors, Racers, "4 Speed Forward Auxiliary Transmission"; Double Power, High, Low; Reverse; Powerful Motor Brake descending hills; "Absolute Neutral." Easy winter cranking. "Full-power" "16-Valve Cylinder Head," 20%-64% Power increase, government test. Other Ford Power Devices coming. Opportunity agent, dealer, owner. Send for trial plan K. Victor-Ford Trans. Mfrs., 246-248 W. 54th, New York.

Aeronautics.

Motorcycle Engine with propeller attached, $16. Gerald Willard, Heron Lake, Minn.

Agents Wanted.

Beginners—Complete "Mail Order System." C—Box 1005, Atlantic City.

Easy Pleasant Work for mechanics, shop men, clerks, during spare hours, will add many dollars to their salaries. Also want persons who can give full time. Big wages assured. Novelty Cutlery Co., 308 Bar St., Canton, Ohio.

$10 Daily refinishing chandeliers, brass beds, automobiles by new method, without capital or experience. Free particulars and proofs. Write today. Gunmetal Co., Ave. D, Decatur, Ill.

$10.00 to $25.00 a day profit! Biggest summer seller. Concentrated fruit drinks. Just add water. Delicious drink in a jiffy. Six popular flavors. Bestever Products Co., 2426-L6 Polk St., Chicago.

Miracle Motor-Gas amazes motorists. 3c. worth equals gallon gasoline. Eliminates carbon. 300% profit. Isom, Idaho, wires: "Ship 500 packages. Made $70 yesterday." Samples free. Chas. A. Butler, Sec'y, Dept. 70, Toledo, Ohio.

Insyde Tyres, inner armor for automobile tires, double mileage and prevent punctures and blow-out. Quickly applied. Costs little. Demand tremendous. Profits unlimited. Details free. American Automobile Accessories Co., Dept. 54, Cincinnati, O.

Sign letters, foil and specialties for windows. Genuine Gold. Anyone can sell and put up. $50 weekly easily made. Chicago Sign System, 326G River St., Chicago.

Electrical Supplies & Appliances.

New Method of Recharging Dry Cells. No cost. Directions 15c. Scott, Box 465, Dayton, O.

Electrical Tatooing Machine and Supplies—Catalogue stamp. Prof. Temke, Exp., 1019 Vine St., Cincinnati, O.

Die Casting and Molds. Hand casting and molds. Everything in white metal is our line. We can help and save you money. Write us. Schley Metal Crafts, 557-559 W. Quincy St., Chicago, Ill.

Do You Know How to connect or reconnect the winding of the induction motor? Why not learn? 100 induction motor winding diagrams—1, 2 and 3 phase, Star, Delta, 2 to 12 poles inclusive. Postpaid $5. E. Glass, 2108 South Broad St., Philadelphia, Penn.

Electrical Photographic and chemical apparatus, motors, fans, switches, spark plugs. Advise what you want or have for sale. H. C. Hancock, Bogota, N. J.

Help Wanted.

Homeworkers on small scale, Manufacturers on large scale wanted, to make Toy Soldiers, Army, Navy, Marines, Cannons, Machine Guns and other toys and novelties. This new American Industry stands out conspicuously since the war stopped all importation of German toys. Greatest chance for industrious people for an independent business. Some people started small, own factories now. Fortunes are made in toys. Enormous demand and future in "American Made Toys". Millions needed this year. We buy these goods all year, paying fixed prices. Experience or tools not necessary. Hundred and more made complete per hour. Casting form outfits $3.00 up. Booklet and information free. Toy Soldier Manufacturing Company. 32 Union Square, New York.

Wanted—Ambitious Workers to start Collection Bureaus. Be independent—make big income yearly. We train and refer business to you. "Scientific Facts" free. National Collection Bureau, Dept. 20, 65 Maynard, Columbus, O.

Salesmen Wanted to Sell Our West Virginia Grown Nursery Stock. Fine canvassing outfit free. Cash commission paid weekly. Write for terms. Our Nurseries were grown in Ohio for more than 40 years, and much of our stock is grown and sold there now. The Gold Nursery Co., Mason City, Mason County, West Virginia.

Wanted Immediately. Men-boys, 18 or over. Hundreds Government Jobs, now obtainable. $1000-1100 first year. Quick raise. Common education sufficient. List positions free. Write Franklin Institute, Dept F 26, Rochester, N. Y.

Make Die-castings. Sketch, Sample, Booklet and Proposition, 12c. Byrd & Blair, Box 227F, Erie, Pa.

Wanted—Electrical engineer and designer for English works. Young man well up in designing electrical units for heating and cooking apparatus. Address Box 80, giving complete experience, salary expected and earliest date available.

Wide Awake Man to Take Charge of our local trade. $4 to $5 a day; steady. No experience required. Pay starts at once. Write today. American Products Co., 1285 American Bldg., Cincinnati, O.

Wanted Men—Be automobile experts. $35 week. Learn while earning. Franklin Institute, Dept. F 806, Rochester, N. Y.

For Men.

Dredge's Necktie Valet removes wrinkles (without ironing) from neckties. Sample 25c. 190 Pilgrim, Highland Park, Mich.

I Teach Men to be Interesting. Send today. Complete course $2. Alice Barrett, Idabel, Okla. Box 45.

Telegraphy.

Telegraphy (both Morse and wireless) and Railway Accounting taught thoroughly and quickly. Big salaries now paid. Great opportunities. Oldest and Largest School—est. 45 years. Catalog free. Dodges Institute, 7th St., Valparaiso, Ind.

Scenery for Hire.

Collapsible Scenery for All Plays. Amelia Grain, Philadelphia, Penn.

Stammering.

St-Stu-t-t-tering and Stammering cured at home. Instructive booklet free. Walter McDonnell, 105 Potomac Bank Bldg., Washington, D. C.

News Correspondents.

Earn $25 Weekly, spare time, writing for newspapers, magazines. Experience unnecessary; details free. Press Syndicate, 566 St. Louis, Mo.

Motion Picture Plays.

Photoplays Wanted—Big prices paid. You can write them. We show you how. Free particulars. Rex Publishers, Box 175, E-2 Chicago.

Motion Picture Film.

Motion Picture Films—$3.50 per 1,000 feet. Dramas or comedies. Postage extra, 25c. L. Harrison, 1283 Lakeland Ave., Lakewood, Ohio.

Exchange Ads.

For Sale—Complete, one K. W. sending set and complete receiving set, range four thousand meters, receives one thousand miles. Also miscellaneous electrical articles. R. D. Wylie, 7 Oregon Yacht Club, Milwaukee, Ore.

Exchange—Pair Murdock No. 50 phones, silk cord for good ukulele or mandolin. Write Harold Southwick, 103 Green St., Fall River, Mass.

For Sale—400 watt 110 V. D. C. generator, $32; 1/10 H. P. 220 V. D. C. motor, $12; voltmeter 0-150 volts, $11; crystalloi detector, $5. List for a stamp. "Radio 9," 77 S. Spencer St., Aurora, Ill.

Bargain—Tesla coil complete: transformer, rotary, condenser, terminals, 30 inch spark. Guaranteed. $100. William Peters, 1107 S. 8th St., Burlington, Iowa.

For Sale—Following apparatus formerly used for Xray work: Mercury turbine and electrolytic interrupters and 8, 12, 16-inch induction coils. These can be used for wireless, Xray or experimental work. Write for description. Henry Cole, M-2, Box 380, Indianapolis.

Sell Complete Chemical Laboratory, also chemical correspondence course. N. Michel, 217 South 4th St., St. Charles, Mo.

Sell Motsinger Sparker for Charging. Telephone receiver and coil. Phone headset. Lot $6. A. Lloyd, Canandaigua, N. Y.

A $68 Course in Electricity by A. W. Wicks sell for $20. Address Wm. Ludwikowski, 26 Humboldt Ave,. Jamaica, N. Y.

Sale—Type RCL 3S21 Mignon cabinet, $35; Brandes superior phones, $3.75; ¼ K. W. Clapp-Eastham transformer, mounted, $11; $3.60 spark gap, $2.50; $5 helix, $3.50; $7.50 antenna switch, marble base, $5; five plate condenser, $1. Sam Keefer, Danville, Penn.

For Sale—22 Savage repeating rifle, octagon barrel; fine condition, $14. Small 110 volt motor, suitable for spark gaps, $5. Set Hawkins' Guides, $8. R. S. Johnston, Jr., East Bellevue, Pittsburgh, Penn.

Wanted—Five sections Murdock moulded condenser in good condition. State price. Burle R. Jones, Muskogee, Okla.

Rotary Quenched Gap, $10; induction motor, $5; Packard ½ K. W. transformer, quartered oak case, $12; mahogany audion box, regenerative and undamped circuits, $6; 5-cell Edison storage battery, 80 A. H., $25. R. C. Hitchcock, Box 550, Middletown, Conn.

Sell—½ K.W. Packard Transformer $8, new Crystaloi detector, oscillation transformer, Murdock 'phones, 600 v. lightning and antenna switches, oil condenser, antenna wire (copper) and insulators, vibrating rectifier, accordeon. List free. Lowell P. Hoyt, Presque Isle, Maine.

Radio Apparatus for Sale—Lightning switch, oil condenser, 30-foot iron pipe masts, complete, 6-60 storage batteries, wall telephones, receivers, condensers etc. George Holmes, Box 666, Electrical Experimenter.

Bargain—New $50 phonograph, $30. C. Gillespie, 72 Woodward, Buffalo, N. Y.

Sell—Omnigraph, key, sounder, buzzer and phone. Without records, $12. Harry Feingold, 737 Prairie Ave., South Bend, Ind.

Sell or Trade—Howard good wireless receiving apparatus, Westinghouse A. C. ammeter 0-200 amperes and busbar. Ladies violin, $45. Duncan Eader, Shelby, Mich.

Radio Amateurs! Attention!—Bargain in De-Forest receiving set; excellent condition; wave length 150 to 1,200 meters; must be seen to be appreciated. Write or call 1311 Pugsley Ave., Westchester, N. Y.

For Sale—Amplifying set, loose coupler, condenser and double receiving phones. Cahn, 182 Pulaski St., Brooklyn, N. Y.

Sell—Complete electrical chemical photography outfit. Send stamp. Clifton Bennett, New Milford, Penna. Route 1.

Typewriter—Like new. For sale or exchange. John Galbreath, Rogers, Ohio.

Sell or Trade—Wireless apparatus. List for stamp. Perry Crawford, 13 Ten Broeck St., Albany, N. Y.

Wanted—Motor Generator, ¼ or ½ K. W. D. C. to A. C. Exchange regenerative receiver, audion bulb, phones. John Di Blasi, 227 East 75th St., N. Y. C.

For Quick Sale or Trade—Telegraph transmitter, ½" spark coil and gap, Multi-Audi-Fone. Want, loose coupler, Baldwin Fones, prism binoculars, variable condenser. C. F. Allen, Box 1504, Providence, R. I.

Exchange—Cont'd

Selling Out at half cost my wireless outfit including ½ K. W. open core transformer, bronze wire, phones, Xray tube, books (including Fleming) and back numbers of this magazine. Goddard, 33 East 50th St., New York.

Wanted—Typewriter. Have 215½ feet plain and 370 feet plated ½-inch copper ribbon, condenser, three sectioned condenser, detector. Harold Miller, 4916 Austin Ave., Chicago, Ill.

L. C. Smith No. 5 in almost new condition. Price $50. Goddard, 33 East 50th St., New York.

Radio Instruments—Cheap. Write. E. Flynn, Collegeville, Minn.

For Sale—Oliver typewriter and two cell medical battery. Earl Brown, Martinsburg, W. Va.

Sale—Fifteen dollars takes new Leishman phototelegraph machine. Good condition. Archie Blackburn, Clarksville, Ark.

Exchange—Chemistry outfit, wireless cabinet for $50 bond. Barkey, 39 West 118th St., New York.

For Sale—Clapp-Eastham type E, 5 K. W transformer, slightly damaged but in good working condition, $1. Brandes trans-Atlantic phones, A-1 condition, $8. K. M. Briggs, 26 Albemarle St., Rochester, N. Y.

Trade—Electrical apparatus for 4,000 coupler. Navy preferred and variables. Edward Brown, East Marion, L. I., N. Y.

For Sale—Dynamo, water motor and chemical and electrical apparatus. Elmer Baseman, 252 N. Porter, Elgin, Ill.

For Sale—All kinds books, magazines, courses, disc-records, theatrical supplies, 1,000 feet films. Send 3c. stamp. Glenn Newton, Pulaski, N. Y.

For Sale—Complete audion receiving cabinet, oscillation transformers, antenna switch, 1-inch spark coil, step-down transformer, wireless key, microscope. A. Alger, 214 Arizona Ave., Lorain, Ohio.

Exchange—7-foot airplane propeller, good shape $10; 5-drawer tool cabinet and 150 miscellaneous tools, $15. Arnold, 2082 Lexington Ave., New York.

For Sale—15 K. W. high voltage transformer, with rheostat and switches. Will consider screw cutting lathe or Thordarson as part payment. Harry Cole, 1515 Linwood Blvd., Okla. City, Okla.

Phonographs.

Build Your Phonograph. "Perfection" high-quality spring and electric motors, tone arms, reproducers. Wonderful results. Big saving. New catalog and building instructions mailed for ten cents. Indiana Phonograph Supply Co., Indianapolis, Ind.

Build Your Own Phonographs and manufacture them for profit. Drawing instructions, parts, price list, blue prints, etc., complete, sent free upon request. Write today. Associated Phonograph Co., Dept. E-1, Cincinnati, Ohio.

Formulas.

500 Formulas, resilvering mirrors, renewing dry batteries, luminous paint, mechanics' soap, 25c. Catalogue 2c. Ideal, 5501-E North Robey, Chicago, Ill.

Agents—Sell egg substitute. Big profits formula, $1. W. Smith, 61 Sumpter St., Brooklyn, N. Y.

Invisible Inks—30 formulas, 15c. Horton P. Jones, Perry, Ia.

Formulas, resilvering mirrors, fish bait, how to make a hectograph, 10c. Each list 2c. W. Clifford, 634 W. Spruce St., Shamokin, Penn.

New Substitute for Eggs. Formula 25c. Walker, Box 465, Dayton, Ohio.

20,000 Formulas, $1 postpaid. List 4c. Oscar C. Hanson, Mentor, Minn.

20,000 Formulas and Trade Secrets, only $1 postpaid. 1,000 for 25c., other offers for stamp. Clifford Camp Co., Claremont, N. H.

Letter Specialists.

Letters That Land Orders and Money Orders written for $4; three for $10. Guaranteed. Criterion Service, Dept. 3, West New York, New Jersey.

Emerson J. Poag, 708 Brandywine, Schenectady, N. Y., writes powe-ful letters, folders, booklets. He prepared several automobile campaigns. Moderate fees. Free suggestions on sales problems. Better chance $1 on 10 letters which netted thousands on automobiles and clothing. Write him. Today!

Novelties.

Waitley's Antique Shop—Large collection "Alaska" Indian relics. Write for list. Worthington, O.

Personal.

Are You Self-Conscious, embarrassed in company, lacking in self-control? These troubles overcome. C. E. Veritas, 1400 Broadway, New York City, N. Y.

Business Opportunities.

Enter a new business. Earn $3,000 to $6,000 yearly in professional fees making and fitting a foot specialty, openings everywhere with all the trade you can attend to; easily learned by anyone at home in a few weeks at small expense; no further capital required; no goods to buy; job hunting, soliciting or agency. Address Stephenson Laboratory, 18 Back Bay, Boston, Mass.

$30.00 a week evenings. I made it with a small mail order business; continued my regular job daytime. Free Booklet tells how, 2 cents postage. Albert W. Scott, Cohoes, N. Y.

$150.00 per month or more on a $10.00 investment plus 6 hours hustle daily, no canvassing. Brewer, 1510 St. Emanuel, Houston, Texas.

$1 does it. Bank references furnished. Investigate us thoroughly, that's all we ask. Results count. Our plan $1 down, $2 monthly few months gives you Warranty Deed to land. May pay profits $200 or more monthly. Maps, reports, established facts free. Address, Sourlake Texas Oil Co., 867 DeMenil, St. Louis, Mo.

Patents for sale. To buy or sell patents address Patent News-H, Washington, D. C., only inventors' newspaper published.

Start a profitable business manufacturing "Puffed Crisp". Delicious confection. Whirlwind money-maker. Machine, Instructions complete $6.50. Samples 10c. Bestever Products Co., 2426-E6 Polk St., Chicago.

Make Die-castings. Sketch, Sample, Booklet and Proposition, 12c. Byrd & Blair, Box 227-F, Erie, Pa.

Build Up an Income in Oil—Others are doing it—Why not you? Today is the opportunity. Join our easy monthly payment plan now—it may mean hundreds in profits. Write for information. National Oil Drilling Co., Dept. K, Houston, Texas.

Start a Vacuum Clothes and Carpet Cleaning business. $150.00 for machinery required. Write today. General Compressed Air & Vacuum Machinery Co., Dept. E, St. Louis.

Dollars Yearly in Your Back Yard. No ginseng, mushroom dope. New ideas. Investigate. Particulars free. Metz, 313 East 89, New York.

Victory—Mechanical Toy Soldier window attraction. 30 inches high. Salutes, turns head, points with finger, etc., as set. Well made, nicely dressed officers, privates, Uncle Sam, etc. Electrically operated. Does some stunt every half minute or oftener as set and will salute soldier and pay no attention to other if desired. Representative wanted in each city and town. Write for prices. The John M. Biggs Co., Box, 324, Chattanooga, Tenn.

Chiropractic—The New Profession. You can learn and earn your way. Practitioners earning $3,000.00 a year and upwards. Proficiency quickly acquired. Send card for information. Howard College, 515-25 S. Ashland Blvd., Chicago.

$10.00 a Day for Amateur Photographers. Ten cents brings the plan which has been successfully operated. J. W. Bilodeau, Lydonville, Vt., Dept. 86.

Iceless Refrigerators easily, cheaply built. Instructions, Blueprints; 4 different types $1.00. Bachman, Box 57, Fullerton, Pa.

Name, address on a swell knife $1.00, on key ring 25c, agents wanted. W. Wooley, Peoria, Ill.

Motors, Engines and Dynamos.

Small Motors and Generators from bankruptcy and receivers' sales. Motors for all phases of current. Immediate delivery. Less than one-half regular prices. See display ad on page 150. Johnston, West End, Pittsburgh, Penn.

500 Watt Motors—Modern, efficient; cost me $10. Investigate! Duplicate! Clark, Barnes Road, Newton, Mass.

Gas Engines—Marine and stationary, rebuilt and guaranteed. Don't fail to get our price list before buying. Prices 50 per cent. lower than others. Write. United Motor Repair & Supply Company, 305-309 Broadway, New York.

Wanted—Small gasoline and steam engines, small lathes, drill presses and other light machinery. Will pay high cash prices for good material. Johnston, West End, Pittsburgh, Pa.

For Advertisers.

It Pays to Advertise when Jacobus prepares the copy. Sales letter $1. Jacobus Advertising Service, 1073 Sanford Ave., Irvington, N. J.

"Quick-Action Advertising—How It Is Building Business for the Progressive Advertisers of America"; A little story of results told by the advertisers themselves—not the publishers. You will be interested in reading this little booklet which we have prepared for prospective advertisers, a copy of which will be gladly mailed to you upon request. It tells you how to talk business with 1,000,000 intelligent, interested and responsive Americans every month—men who know what they want and who have the money to buy it. Write for particulars and rates today. Douglas Wakefield Coutlee, 225 West 39th St., New York.

Patent Attorneys.

Inventors—Send sketch of your invention for advice regarding patent protection. Twenty years' experience. Handbook on patents sent free. Talbert & Talbert, Patent Lawyers, 4820 Talbert Bldg., Washington, D. C.

Patents Procured—Trade Marks Registered—A comprehensive, experienced, prompt service for the protection and development of your ideas. Preliminary advice gladly furnished without charge. Booklet of information and form for disclosing idea free on request. Richard B. Owen, 130 Owen Bldg., Washington, D. C., or 2278-T Woolworth Bldg., New York.

John M. McLachlen, Atty. at Law, Patents, Trade Marks, Copyrights, 410 McLachlen Bldg., Washington, D. C.

M. F. Miller, Ouray Bldg., Washington, D. C., Patent Attorney, mechanical and electrical expert. Best quality of work and results. Moderate charges. Advice free.

Patent Attorney—Electrical engineer, mechanical expert; thorough personal service. Frank Ledermann, 21 Park Row, New York.

James N. Lyles—Patents, trade marks, copyrights. 734-D Eighth St., N. W., Washington, D. C.

Patent Your Own Inventions—Save attorney's fees; we prepare applications; furnish full instructions and give satisfaction. Free information. Carl Larsen Co., Park Row Bldg., New York City.

Protect Your Rights—Write for "Record of Invention" which contains forms to establish evidence of conception of your invention. Prompt personal service. Preliminary advice without charge. J. Reaney Kelly, 732-C Woodward Bldg., Washington, D. C.

Inventions Patented, trade marks registered, labels, prints and publications copyrighted, reasonable fees, correspondence solicited, detailed information free, booklets. Jaynes & Jaynes, 702 Kellogg, Washington, D. C.

Patents—My fee payable in monthly installments. Send sketch for advice. Booklet free. Frank Fuller, Washington, D. C.

Millions Spent Annually for Ideas!—Hundreds now wanted! Patent yours and profit! Write today for free books—tell how to protect yourself, how to invent, ideas wanted, how we help you sell, etc. 212 Patent Dept., American Industries, Inc., Washington, D. C.

Patents and Trade Marks Promptly Secured. Lowest fee. If not familiar with particulars, write immediately. Alberto Mendoza, Attorney, Box 251, Panama, Republic of Panama.

For Inventors.

600 Mechanical Movements, also illustrations and explanations of 50 perpetual motions. My book, Inventors' Universal Educator, 4th edition, tells how to procure and sell a patent for your new invention. Government and other costs. Covers the matter from A to Z. 140 pages elegantly bound. Contains noted Court decisions on Patent cases. Mechanical Movements greatly assist inventors—suggest new ideas that might prove of great aid in perfecting inventions. Tells how to select an attorney. Has valuable information regarding Patent Sharks, Selling Agents and Brokers. Price $1. Postage free. Fred G. Dieterich, 603 Ouray Bldg., Washington, D. C.

Inventions Commercialized—Cash or royalty. Adam Fisher Mfg. Co., 205 St. Louis, Mo.

Inventors join National Institute of Inventors, World Building, New York City; membership society 1,900 strong; will help protect, develop, finance and market your invention. Absolutely no charge. Write for booklet.

Save Money—I will work out your complete patent application, including drawings, for $25. Ready for filing. H. E. Serner, Consulting Engineer, Patent Expert, 1431 Broadway, New York.

Inventors—Protect yourselves. Record your idea before exposing it to anyone, even to us. Write or call. Inventor's Patent Service, 21 Park Row, New York City.

Sell or Finance Inventions—Send dime for sample copy of Money-Talks Magazine. 70-B Park Place, Newark, N. J.

Health.

Tobacco or Snuff Habit Cured or no pay; $1 if cured. Remedy sent on trial. Superba Co., SA, Baltimore, Md.

Pyorrhea—H. E. Kelty, D. D. S., M. D., pyorrhea specialist for 15 years, has developed a successful home treatment for pyorrhea. Purifying, healing, preventative. Full month's treatment and booklet $1. Circular free. Dr. H. E. Kelty, 106 Gladwin Ave., Leonia, N. J.

Cigarette, pipe or chewing habit conquered. Nature's method. Guaranteed. Write for free brochure. Edw. J. Woods, TA-300, Station F, New York.

Instruction

Over 100 Branches thoroughly taught by mail. For "Free Tuition," apply Carnegie College, Rogers, Ohio.

Continued on page 190

Tricks, Puzzles and Games.

100 Kinds Wire and Steel Puzzles—Catalog and leader, 10c.; postpaid. Western Puzzle Works, St. Paul, Minn.

Tricks, Puzzles, Jokes, toys, games, novelties, doll and cane racks, plays, wigs, stage supplies, escapes and illusions. Large 1917 catalogue free. Oakes Magical Co., Dept. 549, Oshkosh, Wis.

Black Art Hindoo experiments. 1919 edition, 25c. Invisible ink. Free trick. Catalogue each order. Linhorst Magic X Shop, St. Louis.

1000 Stage Tricks with 500 illustrations. Catalogue, 10c.; small catalogue free. Hornmann Magic Co., Sta. 6, 170 Eighth Ave., New York.

Magic—Entertain at home. Tricks, puzzles, novelties. Big Catalogue A 25c. Martinka & Co., Inc., Harry Houdini, President, 493 Sixth Ave., New York City.

Magic—Card Tricks—Sensational escapes, jokes Novelties. Everything in the amusement line. Large illustrated catalogue of a thousand tricks free. Write today. Largest amusement goods manufacturers in the world. Heaney Magic Co., Desk 200, Berlin, Wis.

All Magicians are reading the leading magical magazine. You'll like it, too! Send 25c. for three months' trial. Sample copy, 15c.; one year, $1. The Eagle Magician, Dept. EE, Minneapolis, Minn.

Send Stamp for Trick and Lists. W. Wooley, Peoria, Ill.

Printing

100 Engraved style visiting cards, 50c.; 100 emblem cards, 70c. H. Gregory, Warwick, N. Y.

Chemicals

Rare Elements and their salts. We have the metal and salts of Caesium, Arium, Lithium, Palladium, Rubidium, Thallium, Strantium, Tungsten, Titanium, Thorium, Vanadium, Vranium, Ythrium, Zircanium. Rare Hugars and Organic compounds such as Furfurol, Arabinose, Dulcit, Insulin, Lactane, Maltose, Mannose, Dextrose, Levulose, Xylose, Raffinose. For Analysis we have a fine grade of Perchloric Acid at $9.25 per pound; also Osmic Acid at $3.25 per grain. Write for particulars. Ziegler Experimental Laboratory, Rochester, N. Y.

100 Chemicals—Young Man $6—Complete chemical laboratory. 100 chemicals, as mercury, iodine, silver, molybdenum, together with 96 others, generous quantities, also chemical glassware, blowpipe, etc. Prepaid anywhere $6. C.O.D. terms accepted. Full list on request. Borough Chemical Co., Successors to the Swimmer Chemical Co., 1904 Park Place, Brooklyn, N. Y.

Chemicals—Amateurs and experimenters buy your chemicals from us and save money. Prices 25 to 50 lower than others ask. Write for our price list and be surprised. Jos. Simpson, 3880 Windsor Pl., St. Louis, Mo.

Standard Chemicals and laboratory apparatus, cheap and reliable. June list, 5c. Frane, Eureka, Ill.

Chemicals in sets, $11.50 to $46. Write for particulars. Ziegler Experimental Laboratory, Rochester, N. Y.

Miscellaneous.

Big Money—Raise rabbits for us. Belgian, New Zealand, Flemish Giants. We sell stock and pay $7 pair. Express all rabbits raised from our pure bred stock at our expense. Contract and literature 10c. None free. United Fur & Produce Co., Inc., Dept. 63, 3017 Wilson Ave., Chicago.

Marvelous! Send for our time-saving multiplication table. Products of any amounts readily calculated. Handy pocket size card. Price 10c. (coin) by mail. Remittance with orders. Tabulated Information Card Co., 2040 Chestnut St., Philadelphia, Penn.

Closing Out Sale—Get one of our Dollar Adding Machines. 75c. while they last. Smith & Gates Co., East Troy, Wis.

Typewriting—Neatly and correctly done. Manuscripts a specialty. Essays, speeches and letters prepared for all occasions. John H. Owens, 536 East 41st St., Chicago, Ill.

For Sale—Young New Zealand Red Rabbits. Winner four silver cups this season. Per trio $35. White, black, chocolate mice, four pairs $2. Extra female 30c., males 25c. Natural Bridge Rabbitry, 4464 Natural Bridge, St. Louis, Mo.

Start a profitable business manufacturing "Puffed Crisp." Delicious confection. Whirlwind money-maker. Machine, instructions complete $6.50. Samples 10c. Bestever Products Co., 2426—E4, Polk St., Chicago.

For the Hair.

I was Bald. Obtained hair growth by an Indian's ointment containing genuine bear oil and rare plant juices. Many others have good hair-growing results. Will send box, postpaid, with recipe, 10c. John Hart Brittain, 150 E. 32nd St., BA-300. New York.

Books.

Books for Real Live People. Lists free. J. E. Sheridan, 417 E. 151st St., New York.

What Every Draftsman Should Know. Very useful booklet. Price 12c postpaid. Wack Booklet Co., 1943 Patten St., Philadelphia, Pa.

Dear Reader—If Occult, New-Thought and Scientific books appeal to you, send for my catalog, it's free. I have books on Personal Magnetism, Concentration, Spiritualism, Clairvoyance, Seership, Will, Mind, Hypnotism, Messmerism, Character Reading, Healing, Mysticism, Success, Salesmanship, Mechanics, Entertainment, etc. A. W. Martens, J-49, Burlington, Iowa.

World-Romic System, Masterkey to All Languages. Six Textbooks, $1.44. French Chart, 37c; Spanish, 37c; Aviation Dictionary, $1.50. French-English Aviation Dictionary, 61c. Languages, 143 West 47th, New York.

Applied Electricity. Electroplating, motors X-Ray, wireless telegraphy. 350 pages, 214 illustrations, 60c. Ask descriptive circular. T. Perez, 729 McKinley St., Elizabeth, N. J.

Be Healthy! Succeed! Read "Sincere Words," 1919 Wonder. Original, Practical. 20c postpaid. Success, 1943 Patton St., Philadelphia, Pa.

Nature Laws every married and engaged person should know. Two volumes complete, 50c. Over 200 Practical Suggestions for starting your own business, 50c. Central Company, 599 Ninth Ave., New York.

To Get Better Pictures: Read the Amateur Photographers' Weekly; illustrated; weekly prize competitions; print criticisms; many unique features; $1.50 per year; three months' trial subscription 25c. Abel Publishing Company, 401 Caxton Bldg., Cleveland, Ohio.

Old E. E. Back Numbers: We have some valuable old E. E. back numbers on hand as follows: 1915—Jan., Feb., March, April, May, June, July, Aug., Sept., Oct., Nov., Dec., price each 35c. 1916—Jan., Feb., March, May, June, Nov., Dec., price each 35c. 1917—Jan., April, May, June, Aug., Nov., Dec., each 35c. 1918—Mar., May, June, 35c. July, Aug., Sept., Oct., Nov., Dec., each 20c. 1919—Jan., Feb., Mar., Apr., May, 20c. We can fill orders at once upon receipt of your remittance, and if you have not these numbers already, now is your chance to get them, as they probably will be snapped up very quickly. Experimenter Publishing Co., 233 Fulton St., New York City.

Blueprints.

All Audion Circuits—See Wireless. Address "Radio," Post Box 346, Yonkers, N. Y.

Blue Prints—½ H. P. gas engine, 30c.; ¼ H. P. steam engine, 50c.; ⅛ H. P. boiler and engine, 70c.; all 3 for $1. Circulars on castings and engines for stamp. Universal Gas Motor Co., 364 Monadnock, Chicago.

Amateurs—Blue prints furnishing wiring diagram and all data necessary for construction of (Paragon RA6) regenerative receiver. Price now $1 postpaid. Radio Research Laboratories, 2148 Fifth Ave., Troy, N. Y.

Stamps and Coins.

Collection of Coins from twelve countries, 50c. Coin Co., Box 465, Dayton, O.

2000 Different Stamps, complete collection, $1. Stamp Co., Box 465, Dayton, O.

California Gold—Quarter size, 27c.; half dollar size, 53c.; dollar size, $1.10; large cent, 1820, and catalogue, 10c. Norman Shultz, Kings City, Mo.

Fortunes in Postage Stamps—Start stamp business of your own. Send 50c. for sample stock, worth $1.50. M. Shedel, 29 Collahie St., Toronto, Canada.

Stamps—61 All Different Free. Postage, 3c. Mention paper. Quaker Stamp Co., Toledo, O.

500 Finely Mixed United States or Foreign stamps 12c. Philatelic Star, Madison, N. Y.

100 Different Stamps 10c., 200, $25. Michaels, 5600 Prairie, Chicago.

Best One-Cent Approvals in America. F. P. Hand, 1117 So. 60th St., Philadelphia, Penn.

Free—Packet valuable stamps to applicants 50 per cent. Approval. Benj. Forbes, 160 Devilliers, Pittsburgh, Penn.

Free Stamps to Approval Applicants. 3c. Harland Burgett, 419 Spring St., Lima, O.

Old Money Wanted.

We Buy and Sell Old Coins. $2 to $500 each paid. Keep All Old Money; you may have valuable coins. Send 10c. for New Illustrated Coin Value Book, 4 x 6. Guaranteed prices. Get posted. Clarke Coin Co., Box 110 Le Roy, N. Y.

Postcards.

Everything in Postcards—Live-wire list free. Worth-while samples 25c. Mention subjects preferred. Mutual Supply Co., Bradford, Penn.

Five Prettiest Women Cards—Hand colored, 25c.; camera bargain list free. Chas. Durso, Dept. 41, 25 Mulberry St., New York City.

Matrimony

"Get Married"—Ladies, your description published FREE. Write Cupid's Princess, Lock Box 382, Burlington, Vt.

Wireless.

The Audion Bulb—Its early history and development, electron theory and trigger action, also of blue prints, hook ups for receiving damped signals using both air exhausted and gas bulbs, receiving undamped signals and regenerative circuits, two-step amplifier using same (A) and (B) batteries for both steps, wireless telephony with the audion. How to build a one to one transformer for use in an audion amplifier. Gotten out by a chief electrician (radio) U. S. N. For the amateur. Price $2. Address "Radio," Post Box 346, Yonkers, N. Y.

We Fully Qualify You by Mail for the Government first-grade commercial license as a wireless operator, fitting you for positions in merchant marine or land stations. Positions pay $110 and living expenses, up to $3,500 yearly. Our profit sharing plan guarantees a saving of 10 per cent. on tuition to successful students and estimated saving of 50 per cent. Free post graduate course in our Washington school, the largest in America, where we have daily attendance averaging 200 students, expert Government instructors, and full equipment. Most thorough course, Illustrated catalogue and details of profit sharing plan on request. Service Radio School, Dept. E, 902 Pa. Ave., Washington, D. C.

Now That We're Alive Again, Keep Alive by reading the "Aire News." The "Aire News" is a monthly amateur radio magazine containing many novel departments and sure to please either the novice or expert as it contains live, peppy, simply written articles interesting to both. Yearly subscription $1.50 or three months' trial subscription 25c. Be progressive. Send your subscription, regular or trial, immediately and receive the "Reopening Issue" which will be a rip-roaring success. Delay means your missing much so act now and subscribe today. American Institute of Radio Engineering, Omaha, Neb.

Radio Apparatus of Quality—Manufactured to your own specifications. Radio Engineering Company, Baltimore, Md.

Amateurs!—Special cardboard tubing, impregnated, for receiving transformers. 5 and 5½ inches diameter. 25c. per foot, any length. Postage included. Maier & Company, 335 East 93rd St., New York.

Radio Amateurs—Now is the time to get your stations in readiness. Everything for the amateur. Send purple stamp for circular describing STANDARD apparatus only, at prices that will save you money. Crescent Wireless Supply Co., 1500 Lafayette Ave., Mattoon, Ill.

Switch Points—Binding posts, switch levers, and small parts, send 2c for catalogue describing these and other goods. A. W. Bowman & Co., 23 Church St. (Harvard Square), Cambridge, Mass.

Complete Receiving Sets $8.50, $9.50 and up. Instruments, parts, minerals. Circular for stamp. Inquiries invited. Jenkins, 923 Purchase St., New Bedford, Mass.

Blue Print Code Charts—All codes; fine for laboratory. 13c. each, two for 25c. A. B. "Lab." Co., 1315 E. High St., Davenport, Iowa.

Cameras, Supplies—Photo Developing.

Clean, Neat, Perfect Kodak Finishing at the lowest prices. Work returned the same day received. Send film for sample print and copy of Catalog on Developing, Printing, Enlarging and Hand Coloring, also copy of Photo Craft Magazine, which will help you make better pictures. Photo Craft Co., Box 69, Ann Arbor, Mich.

Mail Us 15c. with any size film for development and 6 velvet prints. Or send 6 negatives any size and 15c. for 6 prints, 8 x 10" mounted enlargements 35c. Prompt, perfect service. Roanoke Photo Finishing Co., 255 Bell Ave., Roanoke, Va.

Special Trial Offer—Your next Kodak film developed, 5c. Prints 2c. each. Moser & Son, 1919 St. James Ave., Cincinnati, O.

Slightly Used Cameras—Bargains. Send for list. Cameras exchanged and repaired. L. Huber, 1146 Stebbins Ave., Bronx, New York.

Free—Developing, prints 3¼ x 5½ and smaller, 2½c. 8 x 10 enlargements, 25c. Try us. Gem Studio, 462 Wabasha St., St. Paul, Minn.

Any Six or Eight exposure film up to post card size developed and printed, 10c., or enlargement, 8 x 10, your favorite negative, 20c. Special introductory offer to show high quality work. Associated Photo Co., Dept. 12, Cincinnati, Sta. A.

Song Poems Wanted.

Write the Words for a Song—We write music and guarantee publisher's acceptance. Submit poems on war, love, or any subject. Chester Music Co., 918 So. Michigan Ave., Room 265, Chicago.

You Write Words for a Song—We write the music, publish and secure a copyright. Submit poems on any subject. The Metropolitan Studios, 914 Michigan Avenue, Room 113, Chicago, Illinois.

Write the Words for a Song—We revise poems, write music and guarantee to secure publication. Submit poems on any subject. Broadway Studios, 1970 Fitzgerald Bldg., New York.

Song Poems Wanted—Send today for valuable information free. Hummel Music Co., Clarence Bldg., Cleveland, Ohio.

Music composed to words. Bauer Bros. (formerly of Sousa's Band), Oshkosh, Wis.

GREATEST TOY SENSATION OF THE DAY!

FIGHTING DREADNAUGHT

SENSATIONALLY REALISTIC!!!

Here is a model of Uncle Sam's fighting monsters. Eight big guns, each of which flashes, at correct intervals, from twelve to twenty times. Exact ammunition always obtainable. Absolutely harmless. Can be operated indoors or out. Now boys! Here's your chance to see a battleship in action, and the best of it is you can OWN the ship and command the firing yourself! By having more Battleships, you can stage a REAL EXCITING NAVAL BATTLES in your own home. Price of **Warship and Ammunition, 15c, three for 40c, or a fleet of 12 ships for $1.50 postpaid. Extra Ammunition, 5 cents per pkg**

TOOTH-ACHE STOP

EASY TO USE



Stops the Pain; Stops the Tooth

Squeeze a little in hollow of tooth; the **Ache Stops Instantly;** the paste hardens, forming an antiseptic Filling. Absolutely harmless. Have it ready for the next bad attack. **25c per tube, postpaid.**

Mysterious Ghost



This is not a pretty object, but there is fun in it for people who like practical jokes. The Ghost, when displayed in a perfectly dark room, comes with a ghastly cold bluish radiance, very effective in giving one a "creepy" sensation, even when you know all about it, but a regular startler for those who come upon it unprepared. A great joke to play on your mother-in-law. **Price only 15 cents each, or three for 40 cents.**

"SAFETY 1st" PINS

A clever novelty. The National Safety First Movement has made them very popular. Wear one and show your sympathy with the movement. Also handy for wearing at amateur theatricals and the like. Two sizes, ¾ (small plated) and 1¼ in. (nickel-plated) 6c each, two for 10c p. pd.

INKLESS PEN

WRITES with WATER 600 words every time you dip. Makes its own ink. Writes fashionable violet color. Better and cheaper than fountain pens. Writes a long letter with one dip in plain water. No trouble—no bother—no muss. A pleasure to use. With Nickel Plated Reversible Holder **10 CENTS, 3 for 25c**

SIMPLEX TYPEWRITER ONLY $2.50

Cheap But Good. So Simple a Child Can Use It. We Guarantee the Writing.

Though unprecedentedly cheap, this machine is a **thoroughly practical Typewriter.** We positively guarantee it to produce writing equal in every respect to that of any $1.00 machine. It does not seem possible at the price, but set us send you one for a week of its work and you will be convinced. With reasonable care it will last a lifetime. It is so simple that a child can write with it. You can learn all there is to know about it in five minutes, and an hour's practice will make you an **expert operator.** Every business man must have a typewriter. Illegible pen writing is unbusinesslike and unprofessional. Typewriting is time-saver and slow-going concern. We assure you that the **Practical Typewriter** fully deserves its name, and will fit in the pocket of any professional man, and to do it well. You should not miss this chance of securing a bargain. The letters of the alphabet, the numerals 1 to 10, and punctuation marks are so grouped that the fingers move around the outside of the keyboard most of the time, enabling him to write rapidly. The rollers hold the paper in position while writing and at the end of each line a slight tracken of the roller moves the paper, which makes a click and forces the paper forward, giving the proper line spacing, so that the lines are all an equal distance from each other, so desirable in letter writing. Each type is cast in a strong box, with full printed instructions for use. Price complete, $2.50 sent by mail postpaid.

Johnson Smith & Co., Dept. E 8, 3224 N. Halsted St., Chicago

SQUIRT RING

You may have a lot of fun with this Sparkling Gem Squirt Ring. It consists of a handsome lipated ring, attached to a rubber ball, so arranged that the latter is quite out of view when the ring is in the proper position. Such an attractive looking ring as this cannot fail to be the center of attraction. While the victim is absorbed in admiration, you just squeeze the rubber ball and the observer receives a very pretty surprise. **PRICE 20 CENTS. three for 50 cen s, postpaid. J. S. & CO**

Wonderful X-Ray Tube

A wonderful little instrument producing optical illusions both surprising and startling. With it you can see how it is apparent y the bones of your fingers, the lead in a lead pencil, the inside opening in a pipe stem, and many other similar illusions. A mystery that no one has been able to satisfactorily explain.

Price 10 cents; 3 for 25 cents; 1 dozen, 75 cents. Sent by mail, postpaid.

Sneezing Powder

Place a very small amount of this powder on the back of your hand and then blow it into the air, and everyone in the room or car will begin to sneeze without knowing the reason why. It is most amusing to hear their remarks, as they never, even for a moment, suspect the source, but think they have caught it one from the other. The fun caused by sneezing and sneezing you yourself will be having the time of your life. For parties, political meetings, car rides, in the theatre, at all where there is a gathering of people, it is the greatest Joke you ever played. **12c by Express Only for 30c.**

STAGE MONEY

With a bunch of these bills, it is easy for each person of limited means to appear prosperous. By shaking one of these bills at the proper time and peeling off a genuine bill or two from the outside of the roll, the effect produced will be found to be all that can be desired. **Prices postpaid: 12 bills 10c, 50 Bills 25c, 125 for 50c, or $3.50 thousand.**

NEW BOOK ON

ROPE SPLICING

USEFUL KNOTS, HITCHES, SPLICES, ETC.

How Different Knots Are Made and What They Are Used For. Knots to Use and Knots to Avoid.

A most practical handbook giving complete and simple direction for making all the most useful knots, hitches, rigging, splices, etc. Over 100 illustrations. All about wire rope attachments, lashing, blocks, tackles, etc. 37 Heraldic Knots illustrated. Of great value to mechanics, riggers, campers, boatmen. Price 20c p. pd.

Johnson Smith & Co., Dept. E8, CHICAGO

LUMINOUS PAINT

Make Your Watches, Clocks, Etc., Visible by Night The very latest discovery in the scientific world. Hitherto, practically unobtainable except at an exorbitant price, we have succeeded in producing this remarkable LUMINOUS PAINT, which, applied to the surface of any article, absorbs the rays of white light, rendering it perfectly visible in the dark. **THE DARKER THE NIGHT, THE MORE BRILLIANT IT SHINES.** Quite simple to use. A little applied to the dial of your watch or clock will enable you to tell the time by night. You can coat the push buttons or switch plates of your electric lights, match boxes, and innumerable other articles; make Ammonia Crucifixes, Luminous Essences, etc. Bottle containing sufficient to coat several small articles, **Price 25c.** Larger sizes **50c and $1 postpaid. Johnson Smith & Co., Dept. E8.**

MUSICAL KAZOO

With the Musical Kazoo you can, without previous practice whatsoever, play any tune right off, imitate any bird or animal, bagpipe, snare drum, Punch and Judy, etc. No holes to finger. It is simplicity itself. Produces excellent music. You do not blow into it, but sing, speak, laugh or make any desired instrument used with astonishing results at society meetings, home, club or church entertainments, dances, serenades, picnics, outings, excursions. Just the thing for choruses and shows, bicycle and marching clubs, etc. Excellent for vocal or instrumental accompaniments, either with or without other musical instruments. **Price 15c, Postpaid.**

MAGIC FLUTE

Wonderfully Sweet Toned and Musical

A marvelous musical instrument. Neither instrument produces sweeter music. It be the joyous notes of a quickstep or the solemn strains of a church hymn—in fact, any class of music can be played upon the Humanatone without practice, as it is almost a self-playing instrument. When played with a piano accompaniment, or any other musical instrument, the effect is charming. Full printed instructions for playing sent with each instrument.

Post Paid **15c**

All the Latest Surprising and Joke Novelties

Pharo's Serpents Eggs, box	10c	Cover the Spot Trick, a selen. nov.	10c
Miniature Xmas Tree Ornaments	10c	X Ray Novelty	10c
Cleopatra's Snake (very lifelike)	15c	Trick Pencil	10c
False Mustache (fool your friends)	6c	Rubber Tacks (a good joke)	10c
Ford Auto Puzzle (Latest)	10c	Mesmerized Penny (defies the law of gravitation)	20c
Mysterious Ghost, shines at night	10c	Mysterious Tumbler and Vanishing Coin Trick	
Rubber Razor (very lifelike)	20c	Magic Mirror (take one peep)	10c
Rubber Dagger (sensational)	20c	Magic Plate Lifter	20c
Window Smashers (great joke)	25c	Imitation Gold Teeth, . . . a set	10c
Lookbacktoscope (see behind you)	15c	Great Burglar Puzzle	10c
Great Mind Reading Mystery Cds.	10c	Wire Puzzles, 10c. 22 different, $1.00	
Thurston's Mysterious Trick Cds.	10c		
Flebbing Roosters, pair	10c		

JOHNSON SMITH & CO., Dept. E8, 3224, N. Halsted St. CHICAG

Boys, you can have Movies at your own home with this latest model

MOVING PICTURE MACHINE

Uses Standard Films same as the larger machines. Very easily managed. Simply turn the handle. Good Variety of Films always obtainable

PRICE Complete ONLY **$2.50** Postpaid anywhere including Two Films

Extra Films, 15c each postpaid

THIS IS A GENUINE MOVING PICTURE MACHINE and the motion pictures are clear, sharp and distinct. The Moving Picture Machine is finely constructed, and carefully put together by skilled workmen. It is made of Russian Metal, has a beautiful finish, and is operated by a finely constructed mechanism. The projecting lenses are carefully ground and adjusted, triple polished, standard double extra reflector, throwing a ray of light many feet, and enlarging the picture on the screen up to three or four feet in area. The light is produced by a safety carbide generator, such as is used on the largest automobiles. This throws a dazzling white light on the screen.

It is a solidly constructed and durable Moving Picture Machine. The mechanism is exceedingly simple and is readily operated by the most inexperienced. The pictures shown by this marvelous Moving Picture Machine are not the common, crude and lifeless Magic Lantern variety, but are life-like photographic reproductions of actual scenes, places, and people which never fail to please audiences. This Moving Picture Machine has caused a rousing enthusiasm wherever it was used.

JOHNSON SMITH & CO.

Dept. E 8 3224 N. HALSTED ST., CHICAGO

ANARCHIST BOMBS

Consists of a little glass vial, containing in liquid form a chemical which will produce a most horrible odor. One dropped in a room full of people will cause more excitement than a limburger cheese. The smell will entirely disappear in a short time. 3 Boxes for 25c, shipped by express only. Worth a Dollar's worth of other merchandise.

ITCHING POWDER

This is another good practical joke; the intense discomfiture of your victims to everyone but themselves is thoroughly enjoyable. All that is necessary to start the ball rolling is to deposit a little of the powder on a person's hand and the powder can be relied upon to do the rest. The result is a vigorous scratch, then some more scratch, and still some more. 3 Boxes for 25c. Sent only by express. (Must order at least One Dollar's worth of other merchandise.)

INVISIBLE INK

The most confidential messages can be written with this Ink, but the writing **MAKES NO MARK.** Cannot be seen unless you know the secret. Invaluable for many reasons. Keep you friends and other private memorandums away from prying eyes. Great fun for playing practical jokes. **Only 15c Bottle**

LOVE LETTER INK

Writing written with this remarkable ink vanishes entirely in a few weeks (sooner if desired), leaving the paper QUITE BLANK. 15c p. pd.

LUMINOUS INK Writing can be READ ONLY IN A DARK ROOM; writing shines like fire. Quite invisible at daytime. bottle; 3 for 40c postpaid. **JOHNSON SMITH & CO.**

MULTIPLYING BILLIARD BALLS

The Best Trick of its Kind

This trick is a decidedly novel and surprising The performer hands around the ball for examination, and immediately it is returned to him he seizes it by the tips of his thumbs and fingers and a second ball mysteriously appears. These are held in full view of the audience by the tips of the fingers of the left hand, and another ball is the result. The feat can then be repeatedly makes its appearance. Final y the magician apparently suffers from some kind of spasm and yet another ball is the result. The feat can then be reversed, the balls disappearing one after another until none remains. It is a very interesting trick that is quite easily performed by following the directions that accompany the apparatus. **PRICE, 25 CENTS, POSTPAID.** In full, view of the audience **JOHNSON SMITH & CO.**

GOOD LUCK RING Quaint and Novel Design

A VERY unique and uncommon ring, made of gunmetal, skull and crossbone design, with two brilliants, flash or resplendent sparkling out of the eyes, never failing object of interest. It is said by many to bring Good Luck to the wearer, hence its name Good Luck Ring, and while we will not positively guarantee that, it is certainly a very unique ring that you will take a pride in wearing. They were made to sell at 50 cents, but as a special bargain we will supply them to customers mentioning this paper, at **HALF PRICE, viz., ONLY 25 CENTS, POSTPAID. JOHNSON SMITH & CO.**

LOADED CIGARETTES

Just Like Ordinary Cigarettes, But Such Real Starters!



A box containing ten apparently genuine Cigarettes. They contain a cap which explodes when about one-third smoked.

They appear so real, and afford so good a smoke, that for a time that the victim is taken entirely by surprise. A great laugh producer and entirely harmless. **Price, box of ten, 25 cents postpaid.**

Johnson Smith & Co., Dept. E-8

THE "LITTLE GIANT" TYPEWRITER

A First Class Writing Machine For $1.25



A per ect little typewriter for $1.25. There are thousands of persons who would like to use a typewriter but whose needs and business do not warrant the expense at ached to the purchase and use of a fifty or seventy-five dollar machine. To such persons we confidently recommend our Little Giant. It is thoroughly made, but simple in construction, so that any one can quickly learn to operate it, and write as rapidly as they would with pen and ink. The letters of the alphabet most frequent y used being grouped as to enable one to write rapidly, the numerals, 1 to 10, and the punctuation mark s being together. With this machine you can write your love letters, address envelopes, make out bills, and do almost any kind of work at not much more than the cost of a pen. With each typewriter we send a tube of ink and full printed instructions for using the machine. Price complete $1.25 by mail postpaid.

SERPENT'S EGGS

Each box contains 12 Eggs, which are no larger than a grain of oats. When lit with a match, however, each one gradually hatches itself into a Snake several feet long, which curls and twists about in a most lifelike manner. **Price per box 10c, postpaid. Johnson Smith & Co.**

MYSTIC SKELETON



A jointed figure of a skeleton 14 inches in height, will dance to music and perform various gymnastic movements while the operator may be any distance from it. The figure may be examined by the spectators.

When handed back to the operator it is simply placed on a chair or table, when it will assume a sitting position, and begin to move. At the command of the operator it will sit down, stand up, dance, etc. We send full direction with each Skeleton, by the aid of which anyone can readily make it perform. **10c postpaid.**

CIGARETTE ROLLER

Very neat and handy. Weighs less than a quarter of an ounce. It makes better cigarettes than you can buy and makes them easily and quickly. You can use just the tobacco you prefer and thus have nicer "smokes" than ready-made, and more of them besides saving about half of your money. Just try one and make your cigarettes just to your own liking. **Only 10c or 3 for 25c postpaid,** with full instructions for use. **JOHNSON SMITH & CO.**

MIDGET ILLUSTRATED BIBLE

A Great Curiosity

The Smallest Bible in the World

The Midget Bible is a perfect gem, and a work of art. It is about the size of a cent, a stamp and contains TWO HUNDRED AND FIFTY PAGES of the NEW TESTAMENT, profusely illustrated. This little Bible is a wonder. It is said to bring good luck to the owner, but be sure to be appreciated. **Price, only 12 cents, three Bibles for 30 cents; one dozen Bibles for $1.00 or 100 for $6.00. Cost to import, $8.00.** Excellent Gifts. Bibles amongst friends, church acquaintances, Sunday schools, bazaars, etc. Send for a few and try it.

The CONJURER'S CASKET

Apparatus and Directions for a Number of Mysterious Tricks Enough for an Entire Evening's Entertainment **50c**

ANYONE CAN DO THEM



It is great fun mystifying your friends. Get this Conjurer's Cabinet, and you will be the foremost fellow in your crowd. It contains the apparatus for seven first-rate tricks, including The Disappearing Rose, Fairy Paper, placed on the table, disappears entirely from sight at will; the Magic Vase and Ball Trick (a Wooden Ball is placed inside, and upon replacing the lid has disappeared and is found in someone else's pocket); The Magic Nail with which you can apparently cut your finger almost in two; the Wonderful Card Trick (a card is placed in an envelope, and when opened an entirely different card altogether is found); The Disappearing Coin Box (a coin is placed in the little wooden barrel, and when opened again, is found to have vanished entirely, or can be made to change into a coin of another denomination); The Famous Mesmerized Penny that defies the law of gravitation (suspends from the palm of the hand, nose, cheek, wall, clothing, etc.); The Glass Goblet and Vanishing Coin Trick (a coin is dropped into a glass of water, and when poured out the coin has vanished). With the seven tricks described above we send full printed instructions for performing each trick, so that anyone can readily perform all the tricks to the great amusement of their friends or the public. Any boy of ordinary intelligence with this Cabinet of Tricks in his possession, can give a parlor entertainment not inferior to many professional magicians. Besides the tricks contained in the Cabinet, there are twenty-five other feats and illusions fully explained with full printed instructions, for which you can easily make or procure the necessary apparatus Among them are The Mouse in a Pack of Cards, The Drawn Card, The Hat Trick, To Knock a Tumbler Through a Table, One Cent Rubbed into Two, To Find the Number Thought of, Mysterious Wedding Ring etc. Also added to the above we have three wonderful stage tricks, as follows: The Decapitated Lady, The Floating Woman, Walking on the Ceiling of a Room, and the Disappearing Lady, together with an article on legerdemain and valuable hints to amateur conjurers. **PRICE COMPLETE ONLY 50 CENTS.**

JOHNSON SMITH & CO., Dept. E 8, 3224 N. Halsted Street, CHICAGO

The Newest Novelty Aerial Balloon

Flies gracefully in or outdoors. This is the VERY LATEST SENSATION IN BALLOONS. A brightly colored balloon that measures sixteen inches long is blown up in the usual way, and, when released, the pressure sends the balloon SOARING UPWARD, the 3½-inch propeller SPINNING AROUND AT A LIVELY RATE. The effect is startling. It is a graceful flier that makes the youngsters WILD WITH JOY. May be used repeatedly indoors or outdoors. An immensely interesting toy. **Price 10c each, 3 for 25c, postpaid.**

JOHNSON SMITH & CO., Dept. E 8, 3224 N. Halsted Street, CHICAGO

"The Baby" Double Action Hammerless Revolver

A HANDSOME AND MOST EFFECTIVE WEAPON

$5.50

Measures but 4¼ inches long

Takes regular .22 calibre cartridges

The new **Baby Double Action Hammerless Revolver** has been produced to meet the ever increasing demand for a revolver that would combine small size and light weight with the essential features of **Efficiency and Practicability.** It is small in size, yet is just as effective and serviceable as the most expensive weapon you can buy. Every lady should have a revolver and should know how to use it, and there is no safer or better one made than this. A great feature is its safety action that guards against accidental discharge, making it quite safe for young men and ladies. The illustration gives an idea of its appearance, but it must be seen and used to be thoroughly appreciated. The ammunition used is the standard .22-calibre (short) cartridge obtainable anywhere, or if desired the cartridges from us (cartridges can be shipped only by express). The revolver fires six shots in one loading. The operation of the mechanism is extremely rapid and absolutely reliable; six well aimed shots can be fired in as many seconds; the revolver is very well constructed, with finest nickel plated fluted barrel of cylinder, and it weighs only 4½ ounces. **The Price of the new revolver is only $5.50, sent by mail postpaid to any address. JOHNSON SMITH & CO.**

THE EXPO WATCH CAMERA

The most wonderful and ingenious Camera made

It is but little larger than a watch, which it closely resembles. You can carry the **Expo** about in your pocket and take pictures without any one being the wiser.

One Cent a Picture

The **Expo** loads in daylight with 25 Exposure Films, costing 25c, thus the picture taking part of a whole day's outing must be had for the nominal sum of 25c—One cent a picture. 25 Exposure Films also obtainable. It is simplicity itself to operate. Takes pictures through the stem, where the **Rapid Fire Lens** is located. The photos (5/8 x 7/8) may be enlarged to any size.

Price $2.50

QUICK AS A FLASH

Time and Instantaneous shutters; weighs but 8 ounces; nickel plated. Endorsed by amateurs and professionals the world over. Thoroughly practical—printing and developing of films just the same as ordinary camera—no focusing necessary, pictures, news reporters, detectives, and the general public. Important beats have been secured, with the Watch Camera by enterprising reporters. Produces clear, sharp negatives indoors or outdoors equal to any camera on the market, size or price notwithstanding.

Expo Watch Camera $2.50 FILMS, 10 Exposures 15c, 25 Exposures, 25c Postage 2 Cts Anywhere Leather Pocket Carrying Case, 35c.

Johnson Smith & Co., Dept. E 8, 3224 N. Halsted St., Chicago

This Pretty RUBBER STAMP WITH PAD AND INK, 75c

Here is the Prettiest rubber stamp you ever saw. At very great cost we have had this design specially engraved for our customers, and it cannot be obtained except through us. The design is ornamental, with floral decorations, with a beautiful dove in the upper part conveying its message. Have the address desired name or name and address being tastefully displayed in the center. With this rubber stamp you can brand your letter paper, envelopes, postals and other stationery, and the elaborate and unique design will be admired by all. Placed on the outside of envelopes, packages and other mail matter, it ensures their return to the sender in the event of non-delivery for any reason. It looks very pretty stamped on books, music, photographs, etc. With each stamp we furnish a fine inking stamp pad and a bottle of ink for re-inking the pad, and the PRICE of the COMPLETE OUTFIT, in box, is **ONLY 75 CENTS, POSTPAID.**

New Vamping Card



No Teacher Needed Surprisingly Simple System

Persons having neglected their Musical Education need not despair, for with the aid of our new PIANO PLAYING CARD playing becomes a pleasure. With it you can at once Vamp away to thousands of Songs, Ballads, Waltzes, Rag Time, etc., etc., equal to a Professional Musician. No knowledge of music is required. After using it a few times, you will be able to dispense with the aid of the Vamping Card entirely. **Only 15 cts. p. pd. Johnson Smith & Co., Dept E8**

Gigantic Butter Beans

New Guinea

The New Edible Vegetable Wonder

Grows to an astonishing size, the Beans measuring from 3 to 6 feet long and weighing anything from 1 to 16 lbs. and even more. One Bean is sufficient for a family for several meals. Very palatable and rich in nutritious qualities. A delicate Buttery Flavor is much appreciated. The Vines are easily grown, very prolific, and a most welcome and valuable adjunct to your garden. Try them. They will be found the most delicious vegetable you have ever tasted. Imported direct. Unobtainable elsewhere. Sample packet of Seeds with full directions for cultivating and cooking. 25c, postpaid.

JOHNSON SMITH & CO. DEPT E8 3224 N. HALSTED STREET CHICAGO

SHARPEN-M-ALL SAFETY RAZOR STROPPER

SHARPENS EVERY KIND OF SAFETY RAZOR BLADE

Sharpens the Gillette and Durham Duplex both edges at one time

ALSO SHARPENS THE GEM JUNIOR, EVER READY, KEEN-KUTTER, MARK CROSS, CLARK, AUTO-STROP, STAR CRUSADER.

By using the SHARPEN-M-ALL STROPPER, you will not only get BETTER SHAVES, but you will SAVE MONEY on blades, as you will be able to get from 150 to 200 shaves from one blade, and the last will be as good as the first. Its construction is simple and will last a lifetime. There are no parts that can possibly get out of order. Any one can use it, as well as the most expert barber. It is operated by simply twirling the lever or handle as shown in the illustration. It has two spiral rollers that travel from heel to point as they are revolved, giving the CORRECT DIAGONAL STROKE. There are no screws, adjustments, or any kind of tinkering necessary to operate the machine. The rollers are made of a special material that STROP AND HONE the blade at the same time. The rollers turn only one way, so there is no fear of damaging the blade or the stropper. The SHARPEN-M-ALL is packed in a handsome case, and will be found more stronger than new. Replaces chipped enamel. Anyone can do it; FAILURE IS IMPOSSIBLE. Better and easier than solder. Three sizes, 15 cents, 25 cents and 50 cents.

JOHNSON SMITH & CO., DEPT E8 3224 N. HALSTED STREET CHICAGO

Potmend

Stops a leak in a minute



The finest repairer for Ironware, Agateware, Enamelware, etc. Good for kettles, pots, pans, boilers, and every kind of Ironware, also for tin, copper, aluminum, ice boxes, iron pipes, cracks in stoves, broken china, porcelain, bric-a-brac, bisque, crockery, woodenware, marble, etc. Mended pipe burn, bake or boil out. THE MEND IS THE STRONGEST SPOT IN THE POT. Could not be simpler; just mix the powder with water. HARDENS LIKE IRON. Fire-proof, Water-proof. You can fill a big hole or a small crack. Mended pipe stronger than new. Replaces chipped enamel. Anyone can do it; FAILURE IS IMPOSSIBLE. Better and easier than solder. Three sizes, 15 cents, 25 cents and 50 cents.

Johnson Smith & Co., Dept. E8 3224 N. Halsted St., Chicago

SAVE 1/2 - INSTALL YOUR OWN PLUMBING AND HEATING

NEW HARDIN EASY WAY HARDIN-LAVIN CO CHICAGO

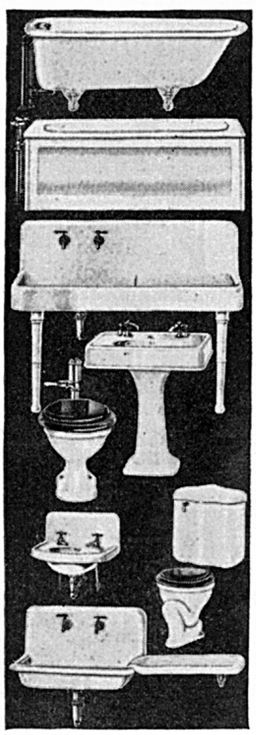

Reduce the High Cost of Building

Plan and Install Your Own Plumbing and Heating System

Our new HARDIN EASY WAY enables any electrician, carpenter, contractor, builder, or farmer to easily install a complete, highest-grade plumbing system. Forty years' experience selling plumbing and heating goods direct has qualified us to supply material equipped with patented, easily-adjustable connections that any handy man can install himself. Our method is perfect, simple and easy. It will enable you to save on time, labor and materials. It will reduce your installation expense ONE-HALF.

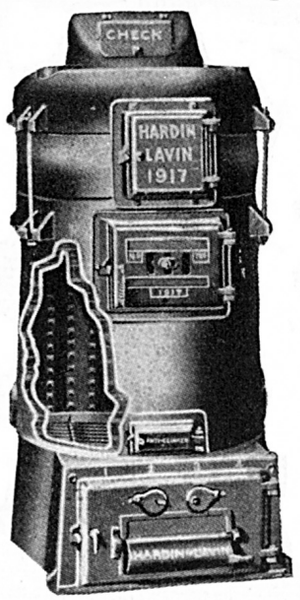

Hardin-Lavin Hot Water Boiler

Send for Handy-Man Book

This big, valuable, instructive book contains practical and exclusive information of value to every handy man. It explains the new HARDIN EASY WAY of installing; it tells you in advance what your plumbing and heating will cost; it gives you suggestions on what fixtures to select and how to install them.

This 256-page HANDY-MAN BOOK will help you save money, time, material and labor, because it will show you fully how to put in your own plumbing and heating by our new, modern and quick method. It contains a complete line of new designs in guaranteed plumbing and heating outfits with the latest improvements, water supply systems, sinks, pipes, valves, fittings, etc. Over 10,000 different fixtures and supplies are illustrated and described in this remarkable book. You can't afford to be without it.

No Expense Spared We have spared no effort and have gone to a great expense to compile this valuable book. With economy still a national necessity, it would be unpatriotic to send this expensive book broadcast to non-interested parties. Therefore, we request a temporary deposit for each copy of **25c** which we refund on first order or we send our **Bargain Bulletin Free.** Send today, our easy method and prices will astonish you.

Let Us Help You Plan and Install Send us a sketch or plan of your plumbing and heating job. Our engineers will show you the easiest, cheapest and most practical way. We furnish clear and easily understood plans FREE. If necessary, we will loan you the tools.



E.E. 6-19

"Handy-Man" Book Coupon

The Hardin-Lavin Co. 4510-20A Cottage Grove Ave., Chicago.

I am enclosing 25c for your Handy-Man Book which shows everything in Plumbing and Heating Fixtures at lowest wholesale prices. I understand my 25c will be refunded on first order.

Name .....

Address .....

City..... State.....

CUT-TO-FIT METHOD

Even if you intend to employ a practical plumber, your big saving by using our products and "New Method" will surprise you. Our simplified systems are fitted at the factory for the exact job for which they are intended. Any handy man with a few ordinary tools can easily install our plumbing, water supply systems, pipeless furnaces, hot water or steam heating plant this cheap, easy way. No experience required. We even furnish the necessary tools if desired. Every fixture we ship is guaranteed to give satisfaction. We will replace without cost to you any part or parts that prove defective or unsatisfactory.

40 YEARS IN BUSINESS

at the same address. $500,000 plants behind our guarantee. Send the attached coupon now for FREE HANDY-MAN BOOK and full particulars.

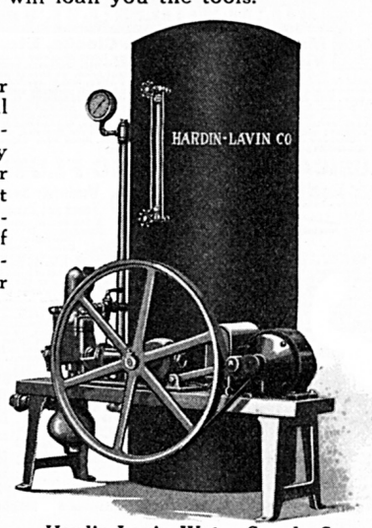

Hardin-Lavin Water Supply System

HARDIN-LAVIN CO.

4510-20A Cottage Grove Ave., Chicago, Ill., U. S. A.

Every Electrical Man Wants These Books and we ship them for your inspection FREE

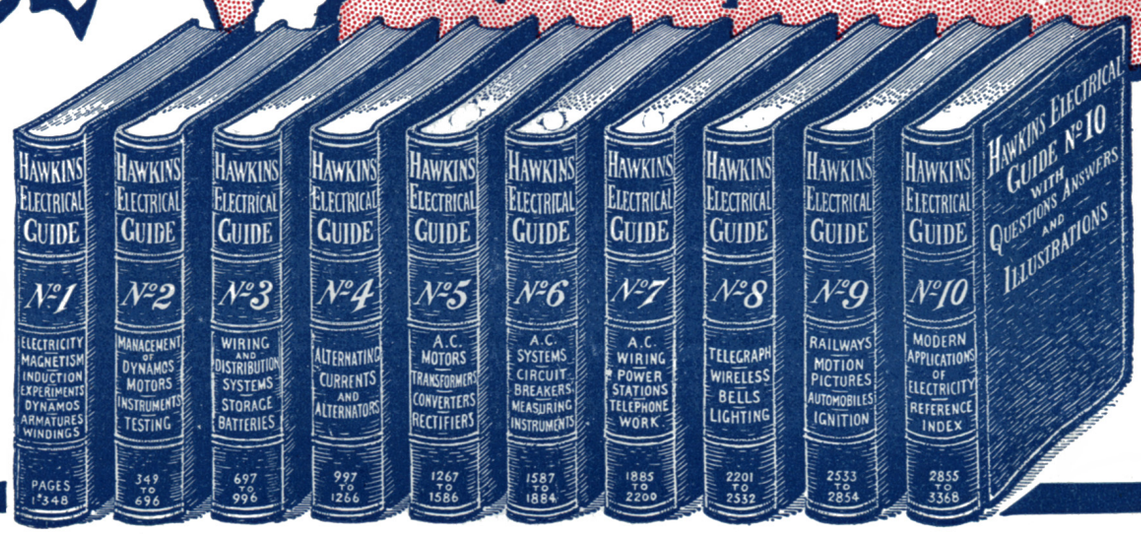

Flexible Covers — Handy Pocket-Size Volumes

10 Volumes — 3500 Pages — 4700 Pictures

$1 Per Volume

$1 Per Month

Just what you need to know to succeed in ELECTRICITY

EVERY electrician, every engineer, every mechanic should know about these wonderfully helpful instructive books, which give in plain words a complete working knowledge of electrical engineering in all its phases.

You run into some new electrical problem almost every day. The information you need to help you in your every day work is in

HAWKINS ELECTRICAL GUIDES

These books place electricity at your finger ends. They cover every imaginable subject, principle, theory, problem, trouble, and way of doing things electrically. Every subject is indexed so that you can turn right to it. They are a study course and a reference guide in one, written in plain every day language—no wasted words—only what you need to know—chock full of up-to-the-minute electrical knowledge. The guides are a complete course in electrical engineering. They will help you in every detail of the day's electrical work. You can't ask an electrical question that Hawkins Guides can't answer.

What Electrical Men Say

Helped Him Make Good

"It is only right for me to recommend highly the Hawkins Guides, for they have been of the greatest assistance to me in placing me in my present position as Superintendent of Construction Department of one of Ohio's largest Electrical Companies. I would like to see every man have a set of Hawkins Guides."
Geo. Knecht, Columbus, Ohio.

In the Naval Electrical Dept.

"The Hawkins Guides are great help to me in the Naval Electrical Department, which they cover very thoroughly." C. J. Cornell,
U. S. Receiving Ship, Brooklyn, N. Y.

Superintendent

"I am now superintendent of the Dunnville Hydro-Electric Systems, and Hawkins Guides were a great help to me in holding down a responsible position."
W. E. Swartz, Dunnville, Ontario.

Wireless Operators

"I have worked wireless for ten years—but I wish I had these books years ago, as they have saved me a great deal of trouble." H. Marshall.
Steamer M & B No. 2,
Walkerville, Ont.

Pocket-Size Flexible Covers

The books are small enough to slip into your coat pocket—handsomely bound in flexible black covers.
You can carry each volume with you until you have mastered its contents. 3,500 pages of actual information and 4,700 illustrations. Once you see these books and put them into actual use you will never again want to be without them. Try it at our expense.

SEND NO MONEY

It will cost you nothing to receive these books—to look them over—ask them all the questions you can think of—use them in your work—study them—pick up some information that will increase your earning ability. We will ship you the entire set of 10 volumes entirely FREE.
This is a sign of our confidence in the guides. Pure gold does not object to being tested. Keep them for seven days and if you do not decide that you can't get along without them, return them to us and owe us nothing.

When you decide to keep them you only have to pay $1.00 down and remit the balance of $9.00 on the easy payment of $1.00 a month till paid for.
Use this coupon to get the books. It will pay you many times over.

THEO. AUDEL & CO.
72 Fifth Ave. New York, N. Y.

SEND NO MONEY - USE THE COUPON

READ THIS PARTIAL LIST OF CONTENTS

No. 1 Contains 348 pages, 388 illustrations. Electrical signs and symbols—static and current electricity—primary cells—conductors and insulators—resistance and conductivity—magnetism—induction coils—dynamo principles—classes of dynamos—armatures—windings—commutation—brushes, etc.

No. 2 Contains 348 pages, 394 illustrations. Motor principles—armature reaction—motor starting—calculations—brake horsepower—selection and installation of dynamo and motors—galvanometers—standard cells—current measurement — resistance measurement — voltmeters — wattmeters—watt hour meters—operation of dynamos—operation of motors, etc.

No. 3 Contains 300 pages, 423 illustrations. Distribution systems—wires and wire calculations—inside, outside and underground wiring—sign flashers—lightning protection—rectifiers—storage battery systems, etc.

No. 4 Contains 270 pages, 379 illustrations. Alternating current principles—alternating current diagrams—the power factor—alternator principles—alternator construction—windings, etc.

No. 5 Contains 320 pages, 614 illustrations. A. C. Motors—synchronous and induction motor principles—A. C. commutator motors—induction motors, transformers; losses, construction, connections, tests—converters—rectifiers, etc.

No. 6 Contains 298 pages, 472 illustrations. Alternating current systems—switching devices—circuit breakers—relays—lightning protector apparatus—regulating devices—synchronous condensers—indicating devices—meters—power factor indicators—wave form measurement—switch boards, etc.

No. 7 Contains 316 pages, 379 illustrations. Alternating current, wiring power stations — turbines; management, selection, location, erection, testing, running, care and repair—telephones, etc.

No. 8 Contains 332 pages, 436 illustrations. Telegraph—simultaneous telegraphy and telephony—wireless — electric bells — electric lighting — photometry, etc.

No. 9 Contains 322 pages, 627 illustrations. Electric railways—electric locomotives—car lighting—trolley car operation—miscellaneous applications—motion pictures—gas engine ignition—automobile self-starters and lighting systems, electric vehicles, etc.

No. 10 Contains 513 pages, 599 illustrations. Elevators—cranes—pumps—air compressors—electric heating—electric welding—soldering and brazing — industrial electrolysis — electro plating — electro-therapeutic—X-rays, etc.

Also a complete 126-page ready reference index of the complete library. This index has been planned to render easily accessible all the vast information contained in the 10 electrical guides. There are over 13,500 cross references. You find what you want to know instantly.

THEO. AUDEL & CO.
72 Fifth Ave.
New York, N. Y.

Please submit me for examination **Hawkins Electrical Guides (price $1 each)**. Ship at once, prepaid, the 10 numbers. If satisfactory I agree to send you $1 within seven days and to further mail you $1 each month until paid.

Signature.....
Occupation.....
Employed by.....
Residence.....
Reference..... E. E

Superintendent of Power Plant
$2500 to $5000 per year
City Technician
$1500 to $3000 per year
Electrical Draftsman
$2000 to $3000 per year
Testing Room Foreman
$2000 to $3000 per year
Supervisor of Maintenance of Electrical Motive Equipment
$2500 to $4000 per year
Technical Salesman and Director of Factory Power Installations
$3000 to $6000 per year

-S-

Unparalleled Opportunities in the New Field of *Electro-Technics !*

Announcing a New Specialized Course of Electrical Instruction to Train Men for This Newest and Biggest Field in the Electrical Profession

FOR years there has been developing in the industrial life of this country a wide commercial gap between the skilled, technically-trained Electrical Engineer and the "apprentice-trained" Electrician. At the top of the electrical profession has stood the Engineer—at the bottom, the Electrician. And in between has grown up a tremendous field of high-salaried industrial positions calling for *technically-trained electricians*—the field of Electro-technics! Thousands of leading industrial concerns today are looking for men who can fill these higher-grade electrical positions—men who can qualify as Power Plant Superintendents, City Technicians, Electrical Draftsmen, Testing Room Foremen, Supervisors of Maintenance of Electrical Motive Equipment, etc.—*Electro-technicians!*

You boys who are interested in an Electrical career—you men in the electrical trade who are handicapped by lack of technical training—*here is your big opportunity!*

Become An Electro-technician—Thousands of Liberal-Salaried Positions Opening Up All Over the Country in This Big, Uncrowded Field

Now is the time to start your training—with a tremendous nation-wide industrial reawakening right at hand—*with the most stupendous skilled-job market in history awaiting you when you graduate!* Already the first signs of the new industrial era are on the horizon. Rise to this world-epoch opportunity. Follow the example of the thousands of men of all ages in all walks of life, who at the close of the Civil War *revolutionized their entire life-careers in the great commercial readjustment that followed the War of the Rebellion.*

SEND ME THIS BOOK

I am interested in the big success-opportunities offered in the new field of Electro-technics. Send me a copy of Booklet-Catalog *"The Electro-technician — A New Factor In Modern Industry."*

It is of course understood that this request places me under no obligation.

Name .....

Address .....

City .....State .....

Age .....Education .....

Present Occupation .....

☐ Tell me about your "Earn-While-You-Learn" Plan.

Mailing This Coupon Today May Prove the Turning Point of Your Life!



The Only School in the Country That Offers This Specialized Electro-technician Course

Nowhere else can you at present secure this valuable, specially-arranged, condensed course of Electro-technical training—training that is thoroughly sound and practical from start to finish—training that combines work-shop, laboratory, drafting-room and recitation-room instruction in equal measure and in efficient daily sequence.

Entrance Requirements

The course is open to all applicants who have at least a common grammar school education or its equivalent. All completed High School work in studies essential to engineering, such as Mathematics, Physics, Chemistry, etc., will be credited to student on entering. Such students will be given advanced standing that will enable them to complete the course in *one-half to three-fourths the regular time,* according to the number of credits they have on entering.

Next Term Opens July 1st

Classes Forming Now

Quick action is necessary as the number of students that can be accommodated in this term is limited. So don't delay. Look at your calendar—note the date—clip the coupon at the left—and some day you'll be looking back to this day and congratulating yourself over and over again for taking the first step in the greatest field Electricity has ever offered!

SCHOOL OF ENGINEERING OF MILWAUKEE

91—373 Broadway, Milwaukee, Wis.

THE CAREY PRINTING CO. INC.
NEW YORK